# FLEX I/O, FLEX I/O XT, and FLEX Ex

Allen-Bradley

Bulletin 1794 and 1797
1794-SG002F-EN-P

# Important User Information

Solid state equipment has operational characteristics differing from those of electromechanical equipment. Safety Guidelines for the Application, Installation and Maintenance of Solid State Controls (publication SGI-1.1 available from your local Rockwell Automation sales office or online at http://www.rockwellautomation.com/literature/) describes some important differences between solid state equipment and hard-wired electromechanical devices. Because of this difference, and also because of the wide variety of uses for solid state equipment, all persons responsible for applying this equipment must satisfy themselves that each intended application of this equipment is acceptable.

In no event will Rockwell Automation, Inc. be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this manual are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, Rockwell Automation, Inc. cannot assume responsibility or liability for actual use based on the examples and diagrams.

No patent liability is assumed by Rockwell Automation, Inc. with respect to use of information, circuits, equipment, or software described in this manual.

Reproduction of the contents of this manual, in whole or in part, without written permission of Rockwell Automation, Inc., is prohibited.

Throughout this manual, when necessary, we use notes to make you aware of safety considerations.

| | |
|---|---|
| | **WARNING:** Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death, property damage, or economic loss. |
| | **ATTENTION:** Identifies information about practices or circumstances that can lead to personal injury or death, property damage, or economic loss. Attentions help you identify a hazard, avoid a hazard, and recognize the consequence |
| | **SHOCK HAZARD:** Labels may be on or inside the equipment, for example, a drive or motor, to alert people that dangerous voltage may be present. |
| | **BURN HAZARD:** Labels may be on or inside the equipment, for example, a drive or motor, to alert people that surfaces may reach dangerous temperatures. |
| **IMPORTANT** | Identifies information that is critical for successful application and understanding of the product. |

Allen-Bradley, Rockwell Automation, FLEX I/O, FLEX Ex, RSLinx, RSLogix 5000, and TechConnect are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

**Summary of Changes**

New and Updated Information . . . . . vii

**Section 1.1**

**About the FLEX I/O and FLEX Ex I/O Systems**

1794 FLEX I/O Overview . . . . . 1
1794 FLEX I/O XT Overview . . . . . 3
General FLEX I/O and FLEX I/O XT Specifications . . . . . 3
Specify a FLEX I/O or FLEX I/O XT System . . . . . 5

**Section 1.2**

**Select FLEX I/O Communication Adapters**

CIP Network Infrastructure. . . . . 7
Select a Network . . . . . 8
EtherNet/IP Network . . . . . 8
ControlNet Network . . . . . 10
DeviceNet Network . . . . . 11
DeviceNet Communication . . . . . 12
Other Networks – Remote I/O . . . . . 12

**Section 1.3**

**Select FLEX I/O Modules**

Digital I/O Modules. . . . . 15
Features. . . . . 15
Select Input Filter Times for Digital Modules. . . . . 18
Modules Specifications . . . . . 20
FLEX I/O Digital AC Input Modules. . . . . 20
FLEX I/O Digital AC Output Modules . . . . . 21
FLEX I/O Digital DC Input Modules . . . . . 23
FLEX I/O Digital DC Output Modules. . . . . 26
FLEX I/O Digital DC Protected Output Modules . . . . . 28
FLEX I/O Digital DC Diagnostic Modules. . . . . 30
FLEX I/O Digital DC Combination Modules . . . . . 33
FLEX I/O Digital Contact Output Modules (Relay) . . . . . 34
FLEX I/O Analog, Thermocouple and RTD Modules. . . . . 36
Modules Specifications . . . . . 38
FLEX I/O Analog Input Modules. . . . . 38
1794-IE8 and 1794-IE8XT Analog 8 Input Module . . . . . 39
1794-IE8H HART Enabled Analog 8 Input Module . . . . . 40
1794-IE12 Analog 12 Input Module . . . . . 40
1794-IF4I and 1794-IF4IXT Isolated Analog 4 Input Module . . . 41
1794-IF8IH HART Enabled Analog 8 Input Module . . . . . 43
1794-IR8 RTD Input Module . . . . . 44
1794-IRT8 and 1794-IRT8XT Thermocouple/RTD Input Module. 45

1794-IT8 Thermocouple/mV Input Module ..... 47
1794-IE8XOE4 8 Input/4 Output Analog Combination Module 49
1794-IE4XOE2 and 1794-IE4XOE2XT 4 Input/2 Output Analog Combination Modules..... 50
1794-IF2XOF2I and 1794-IF2XOF2IXT 2 Input/2 Output Isolated Analog Combination Module ..... 51
FLEX I/O Analog Output Modules..... 52
1794-OE4 and 1794-OE4XT Analog 4 Output Module..... 53
1794-OE8H HART Enabled Analog 8 Output Module ..... 54
1794-OE12 Analog 12 Output Module ..... 55
1794-OF4I and 1794-OF4IXT Isolated Analog 4 Output Module 56
1794-OF8IH HART Isolated Analog 8 Output Module..... 57
FLEX I/O Counter Modules..... 59
1794-IJ2 and 1794-IJ2XT 24V DC Input Frequency Module .... 60
1794-VHSC 2 Channel Very High Speed Counter Module ..... 62
1794-ID2 2 Input Pulse Counter Module ..... 64
1794-IP4 4 Input Pulse Counter Module..... 65

**Section 1.4**

**Select a FLEX I/O Terminal Base Unit** ..... 67

**Section 1.5**

**Select a FLEX I/O Power Supply**
Power Supply Definitions ..... 69
Power Requirements and Transformer Sizing ..... 70

**Section 2.1**

**About the FLEX Ex I/O Systems**
1797 FLEX Ex I/O Overview ..... 73
Entity-Based Architecture..... 77
Hazardous Area Designation ..... 77
Class Designation..... 77
Division/Zone Designations..... 77
Gas/Dust Groups..... 77
Specify a FLEX Ex System..... 80

**Section 2.2**

**Select FLEX Ex I/O Communication Adapters and Distribution Method**
1797-RPA ControlNet Ex Coax Drop Repeater Module..... 83
1797-RPFM ControlNet Ex 3 km Fiber Media Port Adapter..... 84
1797-BCNR Coax Barrier Module..... 84

## Section 2.3

### Select FLEX Ex I/O Modules

Digital I/O Modules . . . . . 89
Features . . . . . 89
Modules Specifications . . . . . 90
1797-IBN16 16 Point Non-isolated NAMUR Input Module . . . . 90
1797-OB4D 24V DC 4 Point Non-isolated Source Output Module . 91
Analog Modules . . . . . 93
Module Specifications . . . . . 94
1797-IE8, 1797-IE8H (HART), and 1797-IE8NF (with Noise Filter) 8 Point 16-bit Single-ended Non-isolated Analog Input Modules . 94
1797-IRT8 8 Point 16-bit Non-isolated RTD Thermocouple/mV Input Module . . . . . 96
HART Interface Modules . . . . . 97
FLEX Ex I/O Analog Output Modules . . . . . 98
1797-OE8 and 1797-OE8H (HART) 8 Point 13-bit Single-ended Non-isolated Analog 8 Output Module . . . . . 98
Counter I/O Module . . . . . 100
1797-IJ2 2 Input Frequency Counter Module . . . . . 100

## Section 2.4

### Select a FLEX Ex I/O Terminal Base Unit

Terminal Base Wiring Diagrams . . . . . 105
1797-TB3 and 1797-TB3S . . . . . 105

## Section 2.5

### Select a FLEX Ex I/O Power Supply

E Type Power Supply . . . . . 108
N Type Power Supply . . . . . 108
Understanding System Planning . . . . . 108
Assigning Power Supplies . . . . . 110
Hazardous Area Installation . . . . . 111
1797-PS1N and 1797-PS1E 85V...253V AC In/Quad-Ex DC Out . . 112
1797-PS2N2 and 1797-PS2E2 24V DC In/Quad-Ex DC Out . . 112

## Section 3.1

**Mount the FLEX System** ..... 115

## Section 3.2

**Select Optional Accessories**
1794-CE1 and 1794-CE3 Extender Cables ..... 117
1794-NM1 FLEX I/O Mounting Kit ..... 117
1492-EA35 DIN Rail Locks ..... 118
1794-LBL FLEX I/O Label Kit ..... 118
1794-N2 FLEX I/O Dummy Filler Module ..... 118
1794-CJC2 ..... 118
1797-BOOT ControlNet BNC Boot ..... 119
1797-INS Trunk Insulator and 1797-EXMK Marking Kit ..... 119
ControlNet Ex Taps ..... 120

## Section 4.1

**Related Documentation**
FLEX I/O and FLEX I/O XT ..... 123
FLEX Ex I/O ..... 127

This manual contains new and updated information. Changes throughout this revision are marked by change bars, as shown to the right of this paragraph.

## New and Updated Information

This table contains the major changes and additions made to this revision.

| Topic | Page |
|---|---|
| Corrected Module Type information for catalog 1794-OA8 from “Nonisolated inputs” to “Noninsolated outputs”. | 16 |
| Corrected Module Type information for catalog 1794-OB16D from “Group isolated inputs Diagnostics” to “Group isolated outputs Diagnostics”. | 17 |
| Corrected Module Type information for catalog 1794-OV32 from “Nonisolated inputs in groups” to “Noninsolated outputs in groups”. | 18 |

## Notes:

# About the FLEX I/O and FLEX Ex I/O Systems

## 1794 FLEX I/O Overview

FLEX I/O offers:

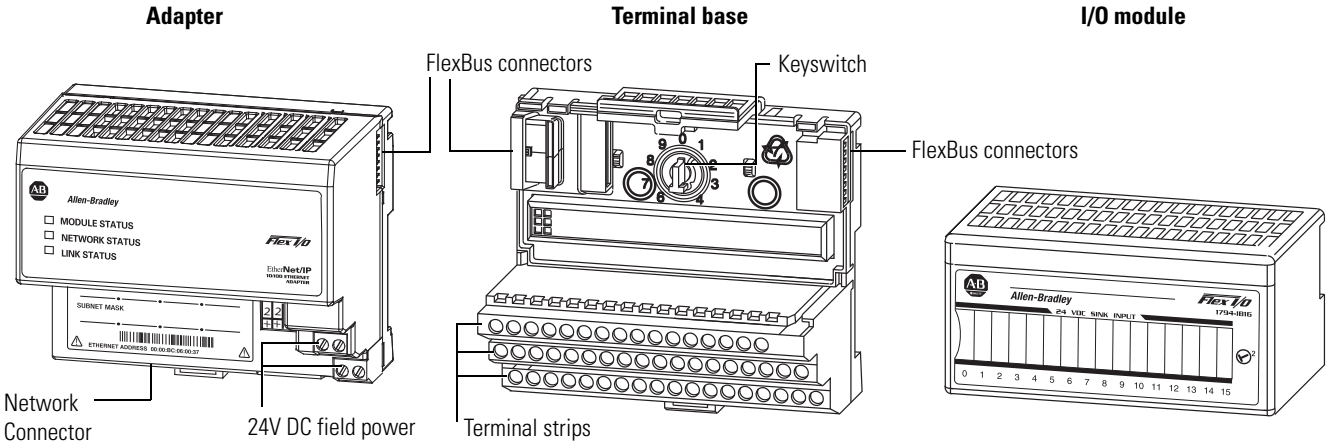


FLEX I/O is a Distributed I/O System that connects to several Networks including EtherNet/IP, ControlNet and DeviceNet.

Flexible, low-cost, modular I/O for distributed applications. FLEX I/O offers all the functions of larger, rack-based I/O without the space requirements.

Independently select the I/O, termination style, and network to meet your application needs.

Two separate connection terminals for field power let you daisy-chain power connections to adjacent terminal bases.

One adapter communicates with up to eight I/O modules. Allows connection to:

- 256 digital input/output points, or
- 96 analog input/output points, or
- mix of I/O to meet your needs.

Modularity of FLEX I/O system provides choice of network and ease of expansion. The wiring terminations are done almost entirely on the terminal base. Terminal base termination selection includes screw-clamp, spring-clamp, and cage-clamp to wire directly to 2-, 3-, or 4-wire devices. Additional options of D-shell, knife disconnect, and fused terminal bases are available.

Adjustable keyswitch prevents incorrect module insertion into a preconfigured terminal base.

Terminal bases can be exchanged without moving other bases in your system.

If desired, connect individual power supplies to each base to isolate modules. Plug the I/O module into the terminal base to connect the I/O bus and field devices.

Remove and insert modules under power. No direct wiring to the module enables you to change modules without disturbing field wiring or system power.

Mix and match I/O modules. There is a wide variety of digital, analog, and specialty modules.

Each FLEX I/O system contains at least one adapter, one terminal base, and one I/O module.

You can power the system with a FLEX power supply (1794-PS13 or -PS3), a 1606 switched mode power supply, or any other compatible power source. Use the terminal block on the terminal base to wire your field devices directly. Wiring directly saves you:

- installation and testing time
- multiple, long wiring runs and external terminal blocks
- control cabinet panel space

FLEX I/O provides additional savings if system problems develop. Combining your field-wiring terminations and the I/O interface into the same location saves you time and money by making your system easier to maintain and troubleshoot. Additionally, the full-featured FLEX I/O system lets you, in non-hazardous location, remove and insert modules under backplane power without disrupting your system.

Your FLEX I/O system can communicate on EtherNet/IP, ControlNet, DeviceNet, and many other open networks including, but not limited, to Remote I/O and PROFIBUS DP.

Adapters and other components are available for adding to your system as your specific application requirements change.

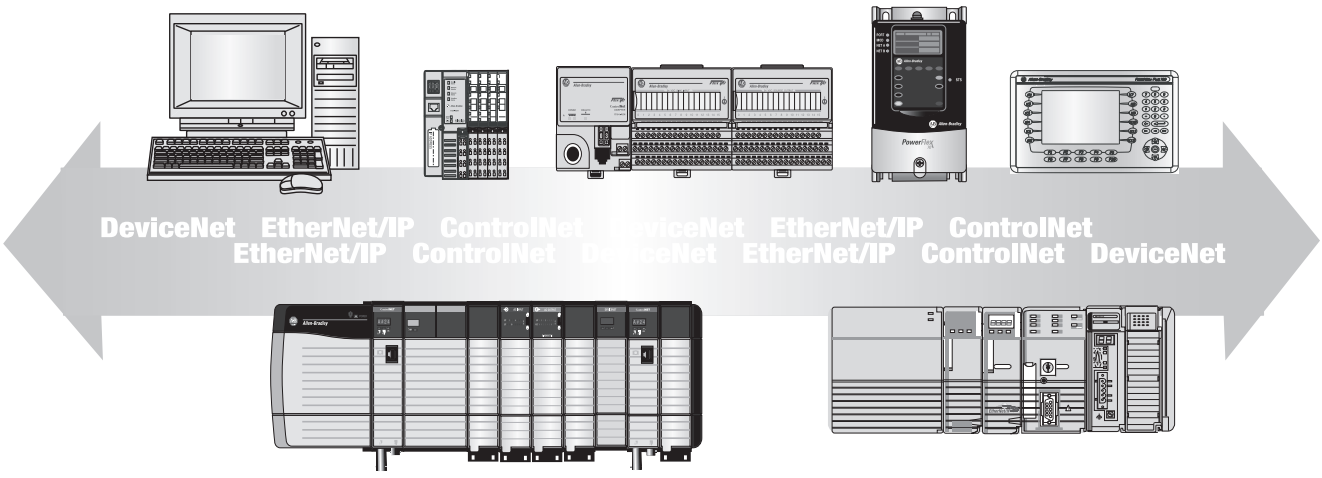

## 1794 FLEX I/O XT Overview

FLEX I/O XT modules are designated for extreme environment use.

They differ from their non XT counterparts only in operational temperature ranges and conformal coating is standard for FLEX I/O XT products.

FLEX I/O XT modules meet or exceed the following standards:

- ANSI / ISA-S71.04-1985; Class G1, G2 and G3 Environments
- CEI IEC 6065A-4; Class 1 and 2 Environments
- UL 746E
- MIL-1-46058C to ASTM-G21; (Tropicalization and fungicide)

These standards specify common emissions and classify their concentration levels in a number of industrial processes. Just a few of the common reactive agents that the FLEX I/O XT modules protect against are:

- H2S – Hydrogen sulfide
- SO2, SO3 – Sulfur dioxide
- CnHn – Hydrocarbons
- NOx – Oxides of nitrogen
- CI2 – Wet Chlorine / Dry Chlorine
- NH3 – Ammonia

## General FLEX I/O and FLEX I/O XT Specifications

The following table shows the similarities and differences between the FLEX I/O and the FLEX I/O XT specifications.

**Specifications Comparison**

| Attribute[1] | 1794 FLEX I/O | 1794 FLEX I/O XT |
|---|---|---|
| Temperature, operating | 0…55 °C (32…131 °F) | -20...70 °C (-4....185 °F) |
| Temperature, nonoperating | -40…85 °C (-40…185 °F) | -40...85 °C (-40...185 °F) |
| Relative humidity | 5…95% non-condensing | |
| Shock, operating[2] | 30 g peak acceleration, 11(±1) ms pulse width | |
| Shock, nonoperating[1] | 50 g peak acceleration, 11(±1) ms pulse width | |
| Vibration | Tested 5 g @ 10…500 Hz per IEC 68-2-6 | |
| Wire size | 0.34mm$^2$…2.5 mm$^2$ (22…12 AWG) stranded copper wire rated at 75 °C or higher<br>1.2 mm (3/64 in.) insulation max | |
| Atmospheric protection | non conformal coated | conformal coated to meet or exceed the following standards:<br>• ANSI / ISA-S71.04-1985; Class G1, G2 and G3 Environments<br>• CEI IEC 6065A-4; Class 1 and 2 Environments<br>• UL 746E<br>• MIL-1-46058C to ASTM-G21; (Tropicalization and fungicide) |

### Specifications Comparison

| Attribute[1] | 1794 FLEX I/O | 1794 FLEX I/O XT |
|---|---|---|
| Certifications (when product is marked)[3] | • UL Listed Industrial Control Equipment<br>• UL Listed for Class I, Division 2 Groups A, B, C, D Hazardous Locations<br>• CE Marked for all applicable directives<br>• CE / ATEX<br>• CSA Certified Process Control Equipment for Class I, Division 2 Group A, B, C, D Hazardous Locations<br>• RCM Marked for all applicable acts<br>• KCC<br>• Marine Certification<br>• SIL 2 Certification<br>• ODVA<br>• ControlNet | |

(1) For all other product-specific specifications, including environmental and certification, see the product sections within this Selection Guide.

(2) To maintain these specifications, you must use DIN rail locks.

(3) See the Product Certification link at www.ab.com for Declarations of Conformity, Certificates, and other certification details.

## Specify a FLEX I/O or FLEX I/O XT System

Follow these steps as you specify your FLEX I/O or FLEX I/O XT system:

| ✓ | Step | See | Page |
|---|---|---|---|
| | **1 Select a communication adapter**<br>Choose the network for your operating system. | CIP Network Infrastructure<br>Select a Network | 7<br>8 |
| | **2 Select I/O modules based on field device**<br>• location of the device<br>• your application<br>• number of points needed<br>• number of points available per module<br>• number of modules<br>Or use the Integrated Architecture Builder tool at http://www.rockwellautomation.com/en/e-tools/configuration.html | Digital I/O Modules<br>FLEX I/O Analog, Thermocouple and RTD Modules<br>FLEX I/O Counter Modules | 15<br>36<br>59 |
| | **3 Select a terminal base**<br>Choose an appropriate terminal base for your modules. | General Specification Comparison | 67 |
| | **4 Choose appropriate power supplies**<br>• Choose appropriate power supply<br>• Ensure sufficient power for the communication adapter and modules | Power Supply Definitions<br>Power Requirements and Transformer Sizing | 69<br>70 |
| | **5 Determine mounting requirements and select accessories**<br>• Determine whether to panel mount or DIN rail mount the FLEX I/O system and at what orientation (horizontal or vertical)<br>• Choose appropriate optional accessories to enhance your system | panel mount or DIN rail mount<br>1794-CE1 and 1794-CE3 Extender Cables<br>1794-NM1 FLEX I/O Mounting Kit<br>1492-EA35 DIN Rail Locks<br>1794-LBL FLEX I/O Label Kit | 115<br>117<br>117<br>118<br>118 |

## Notes:

# Select FLEX I/O Communication Adapters

## Step 1 – Select:

*a communication adapter based on the appropriate network*



A FLEX I/O adapter module interfaces FLEX I/O modules to an I/O scanner port across a communication network. The FLEX I/O adapter module contains a built-in power supply that converts 24V DC to 5V DC for the backplane to power the FLEX I/O modules.

- Your 1794 FLEX I/O system can communicate on:
- EtherNet/IP
- ControlNet, single media or redundant
- DeviceNet
- Many other open networks including, Remote I/O, PROFIBUS DP, and others from Encompass partners

## CIP Network Infrastructure

The Common Industrial Protocol (CIP) allows complete integration of control with information, multiple CIP networks and standard Internet technologies. CIP provides manufacturers with a scalable and coherent architecture incorporating discrete, process, safety, synchronization and motion applications using the same network technology as the ERP, MES enterprise levels applications. Ultimately, network convergence helps align technology with business goals for business process transformation and enterprise-wide visibility.

The following networks share the Common Industrial Protocol at their upper levels, while remaining media independent at their lower levels. This allows manufacturers to specify the best network for their application and eliminate costly and complex gateways when connecting dissimilar upper level networks.

- EtherNet/IP is an open industrial networking standard that supports implicit and explicit messaging and uses commercial, off-the-shelf Ethernet equipment and physical media.
- ControlNet allows intelligent, high-speed control devices to share the information required for supervisory control, work-cell coordination, operator interface, remote device configuration, programming, and troubleshooting.
- DeviceNet offers high-speed access to plant-floor data from a broad range of plant floor devices and a significant reduction in wiring.

## Select a Network

You can configure your system for information exchange between a range of field devices and a specific scanner. You select the communication adapters for the networks that meet your needs:

**Network Comparison by Application Requirement**

| Application Requirements | Network[1] | Communication Adapter |
|---|---|---|
| • Plant management (material handling)<br>• Configuration, data collection, and control on a single, high-speed network<br>• Time-critical applications with no established schedule<br>• Data sent regularly<br>• Internet/Intranet connection<br>• Built-in switch, or high availability requirement (2-port AENTR) | EtherNet/IP | 1794-AENT<br>1794-AENTR<br>1794-AENTRXT |
| • High-speed transfer of time-critical data between controllers and I/O devices<br>• Deterministic and repeatable data delivery<br>• Media redundancy | ControlNet | 1794-ACN15<br>1794-ACN15K[2]<br>1794-ACNR15[3]<br>1794-ACNR15XT[4] |
| • Connections of low-level devices to plant floor controllers<br>• More diagnostics for improved data collection and fault detection<br>• Less wiring and reduced start-up time than a traditional, hard-wired system | DeviceNet | 1794-ADN<br>1794-ADNK |
| • Connections to Remote I/O networks | Remote I/O | 1794-ASB<br>1794-ASB2 |
| • Connection to PROFIBUS DP and DPV1 networks | PROFIBUS DP<br>PROFIBUS DPV1 | 1794-APB<br>1794-APBDPV1 |

(1) Communication adapters and other components are available for adding to your system as your specific application requirements change. For more information, go to www.rockwellautomation.com/encompass and search for products under the FLEX I/O platform.

(2) Modules that have the letter K in the last position of the catalog number, before the series designation, refer to conformal coated versions of the standard modules. These modules meet the following certifications: ANSI / ISA-S71.04-1985, Class G1, G2, and G3 environments; CEI IEC 6065A-4 Class 1 and 2 environments; UL 746E

(3) Modules that have the letter R in the catalog number, before the series designation, refer to redundancy versions of the standard modules and are meant for redundancy networks.

(4) Modules that have the letters XT in the catalog number, before the series designation, refer to extended temperatures version of the standard modules.

### EtherNet/IP Network

EtherNet/IP is a network suitable for use in industrial environment and time-critical applications. EtherNet/IP uses standard Ethernet and TCP/IP technologies and an open application layer protocol called the Control and Information Protocol (CIP). CIP is also the application layer used in DeviceNet and ControlNet networks. The open Application Layer protocol makes interoperability and interchangeability of industrial automation and control devices on EtherNet/IP a reality for automation and control applications.

The 1794-AENT and 1794-AENTR connect FLEX I/O to Ethernet/IP enabled controllers such as ControlLogix or CompactLogix.

**Figure 1 - EtherNet/IP Communication**

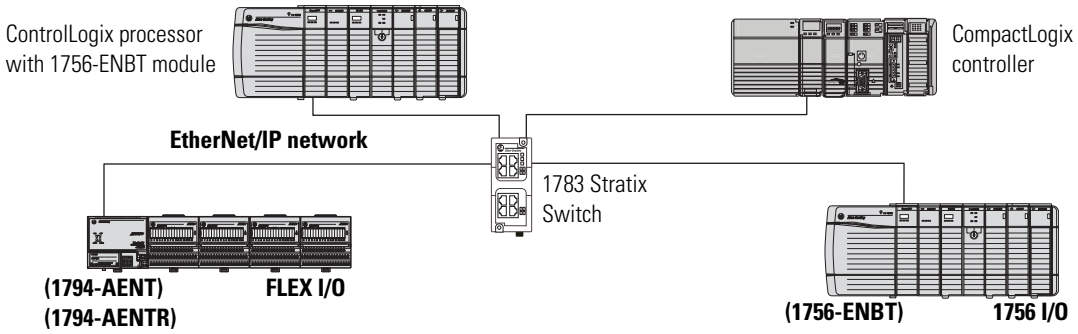


## FLEX I/O EtherNet/IP Adapter Specifications

| Attribute | 1794-AENT | 1794-AENTR | 1794-AENTRXT |
|---|---|---|---|
| I/O module capacity | 8 | | |
| Communication rate | 10/100 Mbps | | |
| Power consumption at 24V DC | 9.6 W | 9.3 W | |
| Power dissipation, max | 7.3 W @ 19.2V DC | 7.1 W @ 19.2V DC | 6.1 W @ 19.2V DC |
| Thermal dissipation | 24.9 BTU/hr @ 24V DC | 24.2 BTU/hr @ 24V DC | 20.8 BTU/hr @ 24V DC |
| Power supply 24V current load | 450 mA | 400 mA @ 24V DC<br>500 mA max | |
| Power supply input voltage, nom | 24V DC | | |
| Operating voltage range | 19.2…31.2V DC (includes 5% AC ripple) | | |
| Ethernet interface | 1 – RJ-45 category 5 | 2 – RJ-45 category 5 | |
| Dimensions (HxWxD), approx | 87 x 94 x 69 mm<br>3.4 x 3.7 x 2.7 in. | 87 x 94 x 92 mm<br>3.44 x 3.7 x 3.6 in. | |

### *Device-Level Ring Topology*

A DLR network is a single-fault tolerant ring network intended for the interconnection of automation devices. FLEX I/O modules can connect to a

DLR network using EtherNet/IP taps. The following is an illustration of how FLEX I/O systems can be integrated into a DLR topology.

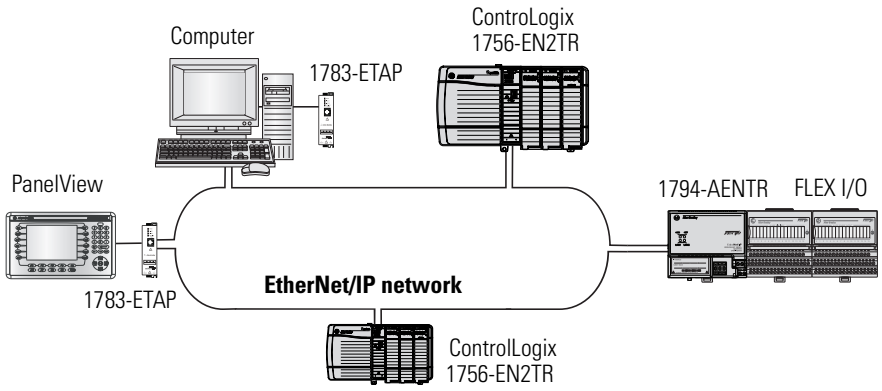


## ControlNet Network

ControlNet is a real-time control network that provides high-speed transport of both time-critical I/O and interlocking data and messaging data, including upload/download of programming and configuration data on a single physical media link. The ControlNet network's highly efficient data transfer capability significantly enhances I/O performance and peer-to-peer communication in any system or application where it is used.

The 1794-ACNR15 adapter is capable of accepting redundant ControlNet cable media. The 1794-ACN15 is a non-redundant version.

The following diagram shows the FLEX I/O platform on a ControlNet network.

**Figure 2 - ControlNet Communication**

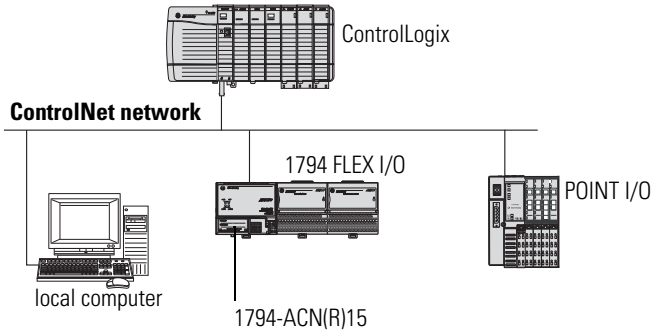

**FLEX I/O ControlNet Adapter Specifications**

| Attribute | 1794-ACN15, 1794-ACN15K, 1794-ACNR15, 1794-ACNR15XT |
|---|---|
| I/O module capacity | 8 |
| Communication rate | 5 Mbps |
| Power consumption at 24V | 7.9 W |
| Inrush current at 24V | 23 A for 2 ms |
| Power dissipation, max | 4.6 W @ 19.2V DC |
| Thermal dissipation | 15.7 BTU/hr @ 19.2V DC |
| Power supply 24V current load | 330 mA |
| Power supply 24V output current, max | 450 mA |
| Power supply input voltage, nom | 24V DC |
| Operating voltage range | 19.2…31.2V DC (includes 5% AC ripple) |
| ControlNet cable | Allen-Bradley RG-6/U Quad shield coax, part no. 1786-RG6 (standard-PVC CM-CL2)<br>or 1786-RG6F/A (high-flex) |
| Isolation voltage | Tested @ 850V DC for 1 s, user power to system |
| Dimensions (HxWxD), approx | 87 x 94 x 92 mm<br>3.4 x 3.7 x 3.6 in. |

## DeviceNet Network

The DeviceNet network is an open low-level network that provides connections between simple industrial devices (such as sensors and actuators) and higher-level devices (such as PLCs and computers). The DeviceNet network uses the proven Common Industrial Protocol (CIP) to provide the control, configure, and data collection capabilities for industrial devices. The DeviceNet network is a flexible network that works with devices from multiple vendors.

The following illustration shows the FLEX I/O platform on a DeviceNet network.

## DeviceNet Communication

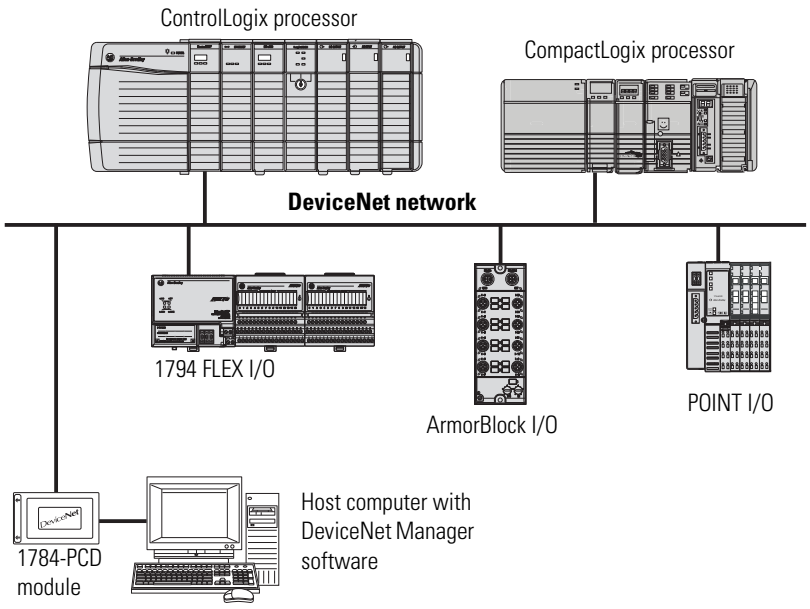


**FLEX I/O DeviceNet Adapter Specifications**

| Attribute | 1794-ADN, 1794-ADNK |
|---|---|
| I/O module capacity | 8 |
| Communication rate | 125 Kbps<br>250 Kbps<br>500 Kbps |
| Power consumption at 24V | 7.9 W |
| Inrush current at 24V | 23 A for 2 ms |
| Power dissipation, max | 4.6 W @ 19.2V DC |
| Thermal dissipation | 15.7 BTU/hr @ 19.2V DC |
| Power supply 24V current load | 330 mA |
| Power supply 24V output current, max | 450 mA |
| Power supply input voltage, nom | 24V DC |
| Operating voltage range | 19.2…31.2V DC (includes 5% AC ripple) |
| DeviceNet cable | Allen-Bradley part no. 1485C-P1-Cxxx. Refer to publication 198-UM001 for more information.<br>Extended Local Cable: 1794-CE1 (0.3 m) or 1794-CE3 (0.9 m) |
| Isolation voltage | Tested @ 850V DC for 1 s, user power to system |
| Dimensions (HxWxD), approx | 87 x 68 x 69 mm<br>3.4 x 2.7 x 2.7 in. |

## Other Networks – Remote I/O

The 1794-ASB and 1794-ASB2 adapters provide connection to the Remote I/O network.

The 1794-ASB2 supports only two FLEX I/O modules. The 1794-ASBLT is only for use with classic PLC 5/15 or PLC 5/25 processors.

**ATTENTION:** Do not use these Remote I/O adapters with the Classic PLC-5/15 or PLC-5/25 processors. Improper operation of the remote I/O may result.

- 1794-ASB, Series E
- 1794-ASB2, Series D
- 1794-ASB2K, Series D

Other Network Communication

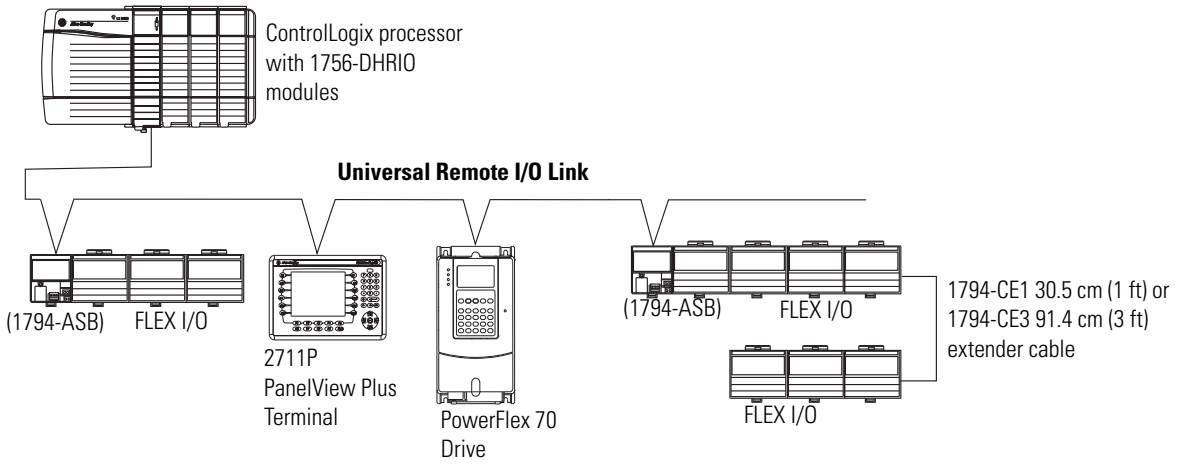


**FLEX I/O Remote I/O Adapter Specifications**

| Attribute | 1794-ASB, 1794-ASBLT(1) | 1794-ASB2 |
|---|---|---|
| I/O module capacity | 8 | 2 |
| Communication rate | 57.6 Kbps<br>115.2 Kbps<br>230.4 Kbps | |
| Power consumption at 24V | 7.9 W | 4.2 W |
| Inrush current at 24V | 23 A for 2 ms | |
| Power dissipation, max | 4.6 W @ 19.2V DC | 3.4 W @ 19.2V DC |
| Thermal dissipation | 15.7 BTU/hr @ 19.2V DC | 11.6 BTU/hr @ 19.2V DC |
| Power supply 24V current load | 330 mA | 175 mA |
| Power supply input voltage, nom | 24V DC | |
| Operating voltage range | 19.2…31.2V DC (includes 5% AC ripple) | |
| DeviceNet cable | Remote I/O: Belden 9463 or equivalent as specified in Allen-Bradley Approved Vendor List, publication ICCG-2.2<br>Allen-Bradley pin connector part no. 942029-03 | |
| Isolation voltage | Tested @ 850V DC for 1 s, user power to system | |
| Dimensions (HxWxD), approx | 87 x 68 x 69 mm<br>3.4 x 2.7 x 2.7 in. | |

(1) The 1794-ASBLT is only for use with Class PLC 5/15 or PLC 5/25 processors.

## Other Networks – PROFIBUS DP

Use the 1794-APB or 1794-APBDPV1 adapter to connect to a PROFIBUS DP network.

**FLEX I/O Remote I/O Adapter Specifications**

| Attribute | 1794-APB | 1794-APBDPV1 |
|---|---|---|
| I/O module capacity | 8 | |
| Communication rate | 57.6 Kbps<br>115.2 Kbps<br>230.4 Kbps | All rates up to 12 Mbps |
| Power consumption at 24V | 7.9 W | 9.6 W |
| Inrush current at 24V | 23 A for 2 ms | |
| Power dissipation, max | 5.3 W @ 19.2V DC | 4.2 W @ 19.2V DC |
| Thermal dissipation | 17.9 BTU/hr @ 19.2V DC | 14 BTU/hr @ 19.2V DC |
| Power supply 24V current load | 450 mA | 640 mA |
| Power supply input voltage, nom | 24V DC | |
| Operating voltage range | 19.2…31.2V DC (includes 5% AC ripple) | |
| PROFIBUS connector | 9-pin D-shell; PROFIBUS standard drop cable | |
| Isolation voltage | Tested @ 850V DC for 1 s, user power to system | Tested @ 850V DC for 60 s, PROFIBUS to backplane to power |
| Dimensions (HxWxD), approx | 87 x 68 x 69 mm<br>3.4 x 2.7 x 2.7 in. | |

Our Encompass partners offer adapters for connecting to RS-232/422/485, Serial/DF1, and Modbus. For details, go to www.rockwellautomation.com/encompass/ and search for products under the platform FLEX I/O.

# Select FLEX I/O Modules

## Step 2 – Select:

*I/O modules*

The FLEX I/O module plugs into the terminal base, connecting to the I/O bus and field devices. Since there is no direct wiring to the I/O module, you can remove and insert modules under backplane power, enabling you to change modules without disturbing field wiring, other I/O modules, or FLEX backplane power. This eliminates costly downtime and the inefficiencies of restarting a system.

The choices and flexibility you have with I/O types range from digital and analog to temperature and motion control. FLEX I/O allows you to use as many as eight terminal bases per adapter which can provide a maximum of 256 digital I/O points or 96 analog channels per adapter. You can mix and match digital and analog I/O with mounting and wiring options, supplying you with a successful distributed system solution.

This flexibility gives you the following choices of I/O signal types:

- Digital: AC and DC voltage signals
- Analog: current or voltage
- Relay: normally open, 2 A capability
- Protected outputs: non-latching, latching, and with diagnostics
- Temperature: thermocouple or RTD
- Motion: high-speed counters, flow metering, and totalization
- Combo modules: combination of input and output capability
- Harsh environments: use FLEX I/O XT in harsh environments
- Intrinsic Safety (IS): use FLEX Ex I/O in hazardous areas to connect to field devices

## Digital I/O Modules

Digital I/O modules interface with field devices such as:

- pushbutton and limit switches
- on/off actuators such as motor starters, pilot lights, and annunciators
- relay contacts

### Features

Modules are available in different densities ranging from 8 to 32 points.

- Digital I/O modules cover a wide electrical range:

120V AC: Input/Output and Isolated Input/Output, 8 and 16 point

220V AC: Input/Output, 8 point

24V DC: Input/Output/Combination, Sink/Source, Protected, Electronically Fused, Diagnostic, 8, 16, and 32 point

48V DC: Sink Input/Source Output, 16 point

Relay: Sink/Source, 8 point

- Isolated inputs and outputs can be used in applications such as motor control centers where individual control transformers are used.
- Protected outputs (P) have electronic protection which acts to shut the output down in reaction to a short circuit, overload, or over-temperature condition.
  Recovery from shutdown is automatic upon removal of the output fault. No fault status is provided to the processor.
- Electronic Fused (EP) module acts to open the output when a fault occurs. The fuse can be reset by operating a pushbutton, via software, or by cycling the input power. Fault status is provided to the processor.
- Diagnostic (D) modules detect, indicate, and report to the processor the following faults:

  open input or output field devices or wiring

  shorted output field devices

  shorted input or output wiring

  reverse polarity of user supply wiring
- Selectable input filter times from <1 to 60 ms.
- LED for each channel indicating status of:

  corresponding input device

  output signal

**Digital I/O Module Summary**

| Catalog Number | Inputs | Outputs | Terminal Base Unit | Electrical Range | Module Type |
|---|---|---|---|---|---|
| **AC Modules** | | | | | |
| 1794-IA8 | 8 | — | 1794-TBN, 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBKD, 1794-TB3K, 1794-TB3SK, 1794-TBNK | 120V AC | Nonisolated inputs |
| 1794-IA8I | | | | | Isolated inputs |
| 1794-IA16 | 16 | | 1794-TB3, 1794-TB3S, 1794-TBN(1), 1794-TB3K, 1794-TB3SK, 1794-TBNK | 120V AC | Nonisolated inputs |
| 1794-IM8 | 8 | — | 1794-TBN, 1794-TBNK | 240V AC | |
| 1794-IM16 | 16 | | | | |
| 1794-OA8 | — | 8 | 1794-TBNF, 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBN, 1794-TBKD, 1794-TBNFK, 1794-TB3K, 1794-TB3SK, 1794-TBNK | 120V AC | Nonisolated outputs |
| 1794-OA8I | | | | | Isolated outputs |
| 1794-OA16 | | 16 | 1794-TB3, 1794-TB2, 1794-TB3S,1794-TB3K 1794-TB3SK, 1794-TBN(1), 1794-TBKD, 1794-TBNK | 120V AC | Nonisolated outputs |
| 1794-OM8 | | 8 | 1794-TBNF, 1794-TBN, 1794-TBNFK, 1794-TBNK | 240V AC | |
| 1794-OM16 | | 16 | | | |

## Digital I/O Module Summary

| Catalog Number | Inputs | Outputs | Terminal Base Unit | Electrical Range | Module Type |
|---|---|---|---|---|---|
| **DC Modules** | | | | | |
| 1794-IB8 | 8 | — | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 24V DC | Nonisolated inputs |
| 1794-IB16 | 16 | — | | | |
| 1794-IB16D | | | 1794-TB32, 1794-TB32S | | Group isolated inputs<br>Diagnostics |
| 1794-IB16XT | | | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | | Nonisolated inputs<br>Extended temperatures |
| 1794-IB10XOB6 | 10 | 6 | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | | Nonisolated I/O |
| 1794-IB10XOB6XT | | | | | Nonisolated I/O<br>Extended temperatures |
| 1794-IB16XOB16P | 16 | 16 | 1794-TB32, 1794-TB32S | | Nonisolated I/O<br>Protected outputs |
| 1794-IC16 | | — | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 48V DC | Nonisolated inputs |
| 1794-IG16 | | | | 5V DC | |
| 1794-IH16 | | | | 125V DC | |
| 1794-IV16 | | | | 24V DC | |
| 1794-IB32 | 32 | | 1794-TB32, 1794-TB32S | | |
| 1794-IV32 | | | | | Nonisolated inputs with groups |
| 1794-OB8 | — | 8 | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 24V DC | Nonisolated outputs |
| 1794-OB8EP | | | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBN, 1794-TB3K, 1794-TB3SK, 1794-TBNK | | Nonisolated, protected outputs |
| 1794-OB8EPXT | | | | | Nonisolated, protected outputs<br>Extended temperatures |
| 1794-OB16 | — | 16 | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 24V DC | Nonisolated outputs |
| 1794-OB16D | | | | | Group isolated outputs<br>Diagnostics |
| 1794-OB16P | | | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBN, 1794-TB3K, 1794-TB3SK, 1794-TBNK | | Nonisolated, protected outputs<br>Conformal coated |
| 1794-OB16PXT | | | | | Nonisolated, protected outputs<br>Extended temperatures |
| 1794-OB32P | | 32 | 1794-TB32, 1794-TB32S | 24V DC | Nonisolated, protected outputs with groups |

**Digital I/O Module Summary**

| Catalog Number | Inputs | Outputs | Terminal Base Unit | Electrical Range | Module Type |
|---|---|---|---|---|---|
| 1794-OC16 | — | 16 | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 48V DC | Nonisolated outputs |
| 1794-OG16 | | | | 5V DC | |
| 1794-OV16 | | | | 24V DC | |
| 1794-OV16P | | | | | Nonisolated, protected outputs |
| 1794-OV32 | | 32 | 1794-TB32, 1794-TB32S | | Nonisolated outputs in groups |

**Relay Modules**

| | | | | | |
|---|---|---|---|---|---|
| 1794-OW8 | — | 8 | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBN, 1794-TBNF, 1794-TB3K, 1794-TB3SK, 1794-TBNK, 1794-TBNFK | 24V DC | Isolated outputs Electromagnetic relays |
| 1794-OW8XT | | | | | Isolated outputs Electromagnetic relays Extended temperatures |

(1) Auxiliary terminal strips are required when using the 1794-TBN.

## Select Input Filter Times for Digital Modules

Input filter times can be set to the following values (EtherNet/IP, ControlNet, and DeviceNet only).

**Input Filter Times – AC Modules**

| Filter Times for Inputs | Maximum Times (ms) | | | |
|---|---|---|---|---|
| | OFF to ON | | ON to OFF | |
| | 1794-IA8, 1794-IA8I | 1794-IA16, 1794-IM8 | 1794-IA8, 1794-IA8I | 1794-IA16, 1794-IM8 |
| Filter time 0 (default) | 8.4(1) | 7.5 | 26.4(2) | 26.5 |
| 1 | 8.6 | 8 | 26.6 | 27 |
| 2 | 9 | 9 | 27 | 28 |
| 3 | 10 | 10 | 28 | 29 |
| 4 | 12 | 12 | 30 | 31 |
| 5 | 16 | 16 | 34 | 35 |
| 6 | 24 | 24.5 | 42 | 44 |
| 7 | 40 | 42 | 58 | 60.5 |

(1) OFF to ON filter is 8 ms.

(2) ON to OFF filter is 26 ms.

**Input Filter Times – DC Modules**

| Filter Times for Inputs | Maximum Times (ms) |
|---|---|
| | OFF to ON and ON to OFF |
| | 1794-IB8, 1794-IB16, 1794-IB32, 1794-IV16, 1794-IC16, 1794-IB10XOB6, 1794-IB16XOB16P |
| Filter time 0 (default) | 0.25 |
| 1 | 0.5 |
| 2 | 1 |
| 3 | 2 |
| 4 | 4 |
| 5 | 8 |
| 6 | 16 |
| 7 | 32 |

**Derating Curve**

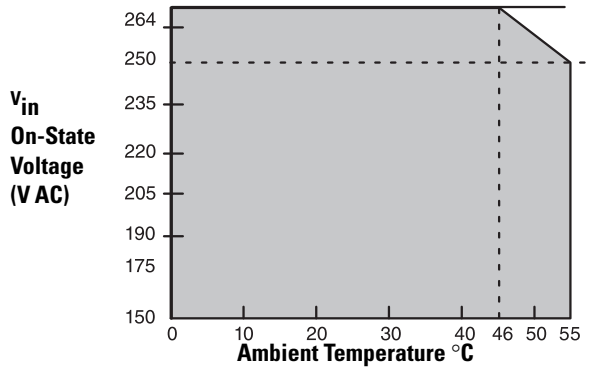


The area within the curve represents the safe operating range for the module under various conditions of user supplied 220V AC supply voltages and ambient temperatures.

= All mounting positions (including normal horizontal, vertical, inverted horizontal) safe operating range.

# Modules Specifications

The following section shows more detailed module specifications in comparative groups to facilitate your selection based on your requirements.

## FLEX I/O Digital AC Input Modules

### Digital AC Input Comparison

| Specification | 1794-IA8, 1794-IA8I | 1794-IA16 | 1794-IM8 | 1794-IM16 |
|---|---|---|---|---|
| Voltage, on-state input, nom | 120V AC(1) | | 240V AC | |
| Terminal base unit | 1794-TBN, 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBKD, 1794-TB3K, 1794-TB3SK, 1794-TBNK | 1794-TB3, 1794-TB3S, 1794-TBN(2), 1794-TB3K, 1794-TB3SK, 1794-TBNK | 1794-TBN, 1794-TBNK | |
| Current, on-state input, nom | 12 mA @ 120V AC, 60 Hz | | 10 mA @ 240V AC, 60 Hz | 11 mA @ 240V AC, 60 Hz |
| Input impedance, nom | 10.6 kΩ | 10 kΩ | 22.3 kΩ | 22.2 kΩ |
| Voltage, on-state input, min | 65V AC | 74V AC | 159V AC | |
| Voltage, off-state input, max | 43V AC | 20V AC | 40V AC | |
| Current, on-state input, min | 7.1 mA | 5.5 mA @ 74V AC, 47 Hz | 5.3 mA @ 159V AC, 47 Hz | |
| Current, off-state input, max | 2.9 mA | | 2.6 mA | |
| Power dissipation, max | 4.5 W @ 132V AC | 6.4 W @ 132V AC | 4.7 W @ 264V AC | 6 W @ 264V AC |
| Thermal dissipation, max | 15.3 BTU/hr @ 132V AC | 21.8 BTU/hr @ 132V AC | 16.2 BTU/hr @ 264V AC | 20.47 BTU/hr @ 264V AC |
| Dimensions (HxWxD) | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed | | | |
| Isolation voltage | 120V (continuous), Basic Insulation Type<br>Type tested at 1250V AC (1240V for 1794-IA8I) for 60 s, between field side and system<br>No isolation between individual channels<br><br>Routine tested to 2150V DC for 1 s, between field side and system<br>No isolation between individual channels | 120V (continuous), Basic Insulation Type<br>Type tested at 1264V AC for 60 s, between field side and system<br>No isolation between individual channels<br><br>Routine tested at 2150V DC for 1 s, between field side and system<br>No isolation between individual channels | 250V (continuous), Basic Insulation Type, field side to backplane<br>No isolation between individual channels<br>Type tested at 1250V AC for 60 s | |

(1) 1794-IA8I – isolated voltage

(2) Auxiliary terminal strips are required when using the 1794-TBN.

**1794-IM8 Derating Curve**

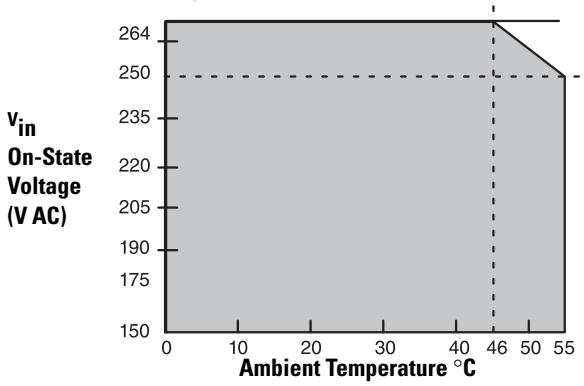


The area within the curve represents the safe operating range for the module under various conditions of user supplied 220V AC supply voltages and ambient temperatures.

= All mounting positions (including normal horizontal, vertical, inverted horizontal) safe operating range.

## FLEX I/O Digital AC Output Modules

**Digital AC Output Comparison**

| Specification | 1794-OA8, 1794-OA8I | 1794-OA16 | 1794-OM8 | 1794-OM16 |
|---|---|---|---|---|
| Voltage, on-state output, nom | 120V AC[2] | | 220V AC | 240V AC |
| Terminal base unit | 1794-TBN, 1794-TBNF, 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBKD, 1794-TBNK, 1794-TBNFK, 1794-TB3K, 1794-TB3SK | 1794-TBN[4], 1794-TBNF, 1794-TB2, 1794-TB3S, 1794-TBKD, 1794-TBNK, 1794-TBNFK, 1794-TB3K, 1794-TB3SK | 1794-TBN, 1794-TBNF, 1794-TBNK, 1794-TBNFK | |
| Current, on-state output, min | 5 mA per output | | | |
| Current, on-state output, max | 500 mA pre output @ 55 °C [3]<br>750 mA per output @ 35 °C<br>1.0 A on 4 nonadjacent outputs and 500 mA on the remaining 4 outputs @ 30 °C | 500 mA per output @ 55 °C[5] | 500 mA @ 55 °C[6] | |
| Current, on-state output, per module | 4.0 A (8 outputs @ 500 mA) | 4.0 A (16 outputs @ 250 mA) | 4.0 A (8 outputs @ 500 mA)[5] | 4.0 A (16 outputs @ 250 mA) |
| Leakage current, off-state output, max | 2.25 mA | | 2.5 mA | |
| Voltage drop, on-state output, max | 1.0V @ 0.5 A | 1.5V @ 0.5 A | | |
| Output surge current, max | 7 A for 45 ms, repeatable every 8 s | 7 A for 40 ms, repeatable every 8 s | | |
| Voltage, on-state output, min[1] | 85V AC | | 159V AC | |
| Voltage, on-state output, nom | 120V AC | | 240V AC | |
| Voltage, on-state output, max | 132V AC | | 264V AC | |
| Power dissipation, max | 4.1 W @ 0.5 A<br>6.3 W @ 0.75 A<br>6.3 W @ 1.0 A | 4.7 W @ 0.5 A | 5 W @ 0.5 A | 6 W @ 264V AC |
| Thermal dissipation, max | 14.0 BTU/hr @ 0.5 A<br>21.1 BTU/hr @ 0.75 A<br>21.4 BTU/hr @ 1.0 A | 16.1 BTU/hr @ 0.5 A | 17.1 BTU/hr @ 0.5 A | 20.47 BTU/hr @ 264V AC |

### Digital AC Output Comparison

| Specification | 1794-OA8, 1794-OA8I | 1794-OA16 | 1794-OM8 | 1794-OM16 |
|---|---|---|---|---|
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed | | | |
| Isolation voltage | 120V (continuous), I/O to system<br>(and channel to channel for 1794-OA8I)<br>No isolation between individual channels<br>Tested to 2150V DC for 1 s and 1250V AC for 60 s | | Tested at 2600V DC for 1 s, I/O to system<br>No isolation between individual channels | 250V (continuous), Basic Insulation Type, field side to backplane<br>No isolation between individual channels<br>Type tested at 1250V AC for 60 s |

(1) The external AC supply voltage must be capable of a 50 A surge for 1/2 cycle at power-up.

(2) 1794-OA8I – isolated voltage

(3) sufficient to operate an A-B 500 NEMA size 3 motor starter

(4) Auxiliary terminal strips are required when using the 1794-TBN for the 1794-OA16.

(5) If using 0.5 A outputs, alternate wiring so that no two 0.5 A outputs are adjacent. See the 1794-OA16 Derating Curve for mounting other than the normal horizontal.

(6) See the 1794-OM8 Derating Curve.

**IMPORTANT**

- The output signal delay, OFF to ON or ON to OFF is 1/2 cycle maximum.
- Modules have a yellow status indicator for each channel. These indicators are driven from the logic-side circuitry.
- Module outputs are not fused. Fusing of individual outputs is required. If applicable, the 1794-TBNF is recommended, otherwise you must provide external fusing. The following fuses are recommended:
  - 1794-OA8, 1794-OA8I – Use 1.6 A, 250V Slow-Blow, Littelfuse (part number 23901.6); San-o SD6-1.6 A (AB part number 94171304). The 1794-TBNF comes with SD6-1.6 A fuses installed.
  - 1794-OA16 – Use 2.5 A, 150V MQ2 normal fuse.
  - 1794-OM8 – Use 0.8 A, 250V MQ4 normal fuse.

### 1794-OA16 Derating Curve

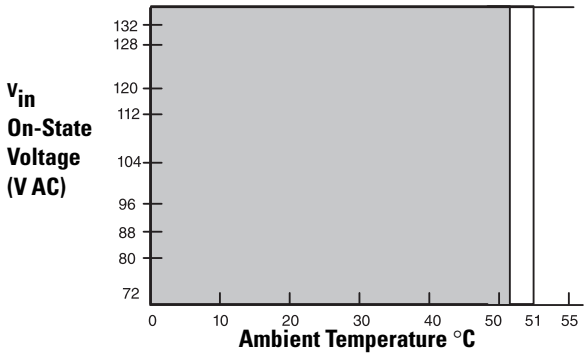


The area within the curve represents the safe operating range for the module under various conditions of user supplied 220V AC supply voltages and ambient temperatures.

= Normal mounting safe operating range included

= Other mounting positions (including inverted horizontal, vertical) safe operating range

**1794-OM8 Derating Curve**

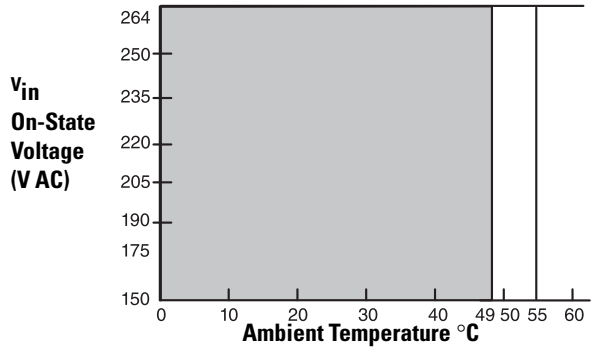


The area within the curve represents the safe operating range for the module under various conditions of user supplied 220V AC supply voltages and ambient temperatures.

□ = Normal mounting safe operating range ▒ included
▒ = Other mounting positions (including inverted horizontal, vertical) safe operating range

## FLEX I/O Digital DC Input Modules

**Digital DC Input Comparison**

| Specification | 1794-IB8, 1794-IB16, 1794-IB16XT | 1794-IV16 | 1794-IB32 | 1794-IV32 | 1794-IC16 | 1794-IG16 | 1794-IH16 |
|---|---|---|---|---|---|---|---|
| Voltage, on-state input, min | 10V DC, sinking | 10V DC, sourcing | 19.2V DC, sinking | 19.2V DC, sourcing | 30V DC, sinking | -0.2V DC, TTL | 90V DC, sinking |
| Voltage, on-state input, nom | 24V DC | | | | 48V DC | 0V DC | 125V DC |
| Voltage, on-state input, max | 31.2V DC | | | | 60V DC | 0.8V DC | 146V DC |
| Voltage, off-state input, max | 5V DC | | | | 10V DC | 2.0...5.5V DC | 20V DC |
| Terminal base unit | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 1794-TB32, 1794-TB32S | | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | | |
| Current, on-state input, min | 2.0 mA | | | | | — | 1.0 mA |
| Current, on-state input, nom | 8 mA @ 24V DC | | 4.1 mA @ 24V DC | 4.1 mA | 5 mA @ 48V DC | — | 2 mA @ 125V DC |
| Current, on-state input, max | **1794-IB16:** 12 mA **1794-IB8, 1794-IV16:** 11 mA **1794-IB16XT:** 5.0 mA | | 6 mA | 6 mA | 11 mA | — | 3 mA |
| Current, off-state input, max | 1.5 mA | | | | | 4.1 mA | 0.8 mA |
| Input impedance, max | 4.6 kΩ | 4.7 kΩ | 6 kΩ | | 11 kΩ | — | 60 kΩ |

### Digital DC Input Comparison

| Specification | 1794-IB8, 1794-IB16, 1794-IB16XT | 1794-IV16 | 1794-IB32 | 1794-IV32 | 1794-IC16 | 1794-IG16 | 1794-IH16 |
|---|---|---|---|---|---|---|---|
| Power dissipation, max | **1794-IB8:** 3.5W @ 31.2V DC<br>**1794-IB16:** 6.1W @ 31.2V DC<br>**1794-IB16XT:** 2W @ 31.2V DC | 5.7 W @ 31.2V DC | 6.0 W @ 31.2V DC | | 6.4 W @ 60V DC | 1.4 W @ 5.5V DC | 6 W @ 146V DC |
| Thermal dissipation, max | **1794-IB8:** 11.9 BTU/hr @ 31.2V DC<br>**1794-IB16:** 20.8 BTU/hr @ 31.2V DC<br>**1794-IB16XT:** 6.8 BTU/hr @ 31.2V DC | 19.4 BTU/hr @ 31.2V DC | 20.5 BTU/hr @ 31.2V DC | | 21.9 BTU/hr @ 60V DC | 4.78 BTU/hr @ 5.5V DC | 20.47 BTU/hr @ 146V DC |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed | | | | | | |
| Isolation voltage | 50V (continuous), Basic Insulation Type, between field side and system<br>No isolation between individual channels<br>**1794-IB8, 1794-IB16XT:**<br>Type tested at 850V DC for 60 s<br>**1794-IV16:**<br>Type tested at 700V DC for 60 s<br>**1794-IB32:** Routine tested at 2121V DC for 2 s<br>**1794-IV32:** Type tested at 707V DC for 60 s<br>**All other modules:**<br>Type tested at 707V DC for 60 s | | | | Tested at 1900V DC for 1 s, I/O to system<br>No isolation between individual channels | 50V (continuous), Basic Insulation Type, between field side and system<br>No isolation between individual channels<br>Type tested at 707V DC for 60 s | 250V (continuous), Basic Insulation Type, between field side and system<br>Type tested at 1706V DC for 60 s, between field side and system<br>No isolation between individual channels |

**IMPORTANT**

- Do not put the 1794-IB8 module next to an output module in 8-point compact addressing with the 1794-ASB2/C or 1794-ASB/D.
- Modules have a yellow status indicator for each channel. These indicators are driven from the customer field-side input device.

**1794-IB16 Derating Curve**

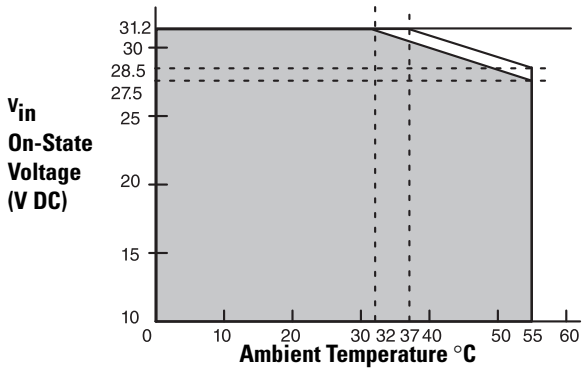


The area within the curve represents the safe operating range for the module under various conditions of user supplied 24V DC supply voltages and ambient temperatures.

= Normal mounting safe operating range included
= Other mounting positions (including inverted horizontal, vertical) safe operating range

**1794-IB32 Derating Curve**

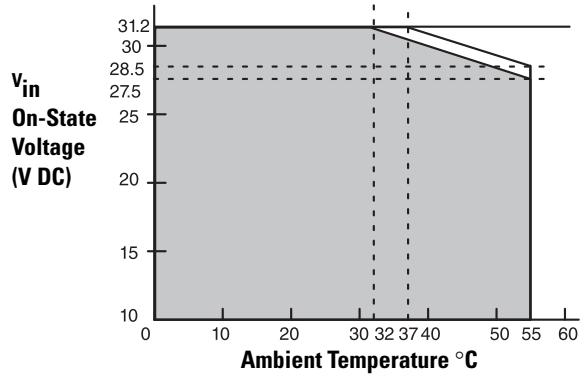


The area within the curve represents the safe operating range for the module under various conditions of user supplied 24V DC supply voltages and ambient temperatures.

= Normal mounting safe operating range included
= Other mounting positions (including inverted horizontal, vertical) safe operating range

**1794-IC16 Derating Curve**

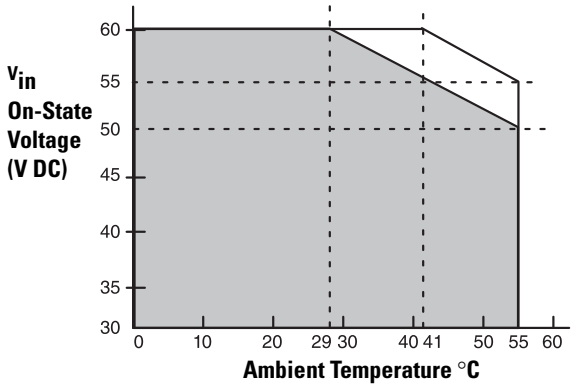


The area within the curve represents the safe operating range for the module under various conditions of user supplied 48V DC supply voltages and ambient temperature.

□ = Normal mounting safe operating range ▭ included
▭ = Other mounting positions (including inverted horizontal) safe operating range

## FLEX I/O Digital DC Output Modules

- 1794-OB8 and 1794-OB16 provide 16 sourcing 1/2 Amp outputs (8 for the 1794-OB8) over a wide 10...31.2V DC input voltage range.
- 1794-OV16 is the sinking version of the 1794-OB16.
- 1794-OV32 is the 32 output version of the 1794-OV16.
- 1794-OC16 is the 48V DC version of the 1794-OB16.
- These modules are not fused. External fusing is strongly recommended or use protected output modules. Module outputs are not fused. Fusing of outputs is recommended. If fusing is desired, you must provide external fusing.

  For 1794-OB8, 1794-OB16, and 1794-OV16 use SAN-O MQ4-800 mA fuse.

  For 1794-OC16 use 2 A, 150V AC MQ2 normal fuse.

### Digital DC Output Comparison

| Specification | 1794-OB8 | 1794-OB16 | 1794-OV16 | 1794-OV32 | 1794-OG16 | 1794-OC16 |
|---|---|---|---|---|---|---|
| Voltage, on-state output, nom | 24V DC, sourcing | | 24V DC, sinking | | 0V DC | 48V DC, sourcing |
| Voltage, on-state output, min | 10V DC | | | | 0V DC | 30V DC |
| Voltage, on-state input, max | 31.2V DC | | | | 0.4V DC | 60V DC @ 45 °C<br>55V DC @ 55 °C |
| Voltage drop, on-state output, max | 0.5V DC | | 0.2V DC | | — | 1.0V DC @ 0.5 A |
| Terminal base unit | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | | | 1794-TB2,<br>1794-TB3,<br>1794-TB3S,<br>1794-TB3K,<br>1794-TB3SK |
| Current, on-state output, min | 1.0 mA per channel | | | | 0.15 mA per channel | 2.0 mA per channel |
| Current, off-state output, max | 500 mA per channel<br>4 A per module | 500 mA per channel<br>8 A per module | | 500 mA | 24.0 mA per channel | 500 mA per channel<br>8 A per module |
| Leakage current, off-state output, max | 0.5 mA | | | | 1 mA | 1.0 mA |
| Output surge current, max | 2 A for 50 ms, repeatable every 2 s | | | | — | 4 A for 10 ms, repeatable every 2 s |
| Output delay time, OFF to ON, max | 0.5 ms | | | | 0.25 ms | 0.5 ms(1) |
| Output delay time, ON to OFF, max | 1.0 ms | | | | 0.5 ms | 1.0 ms @ 25 °C<br>2.0 ms @ 55 °C(2) |
| External DC supply voltage range | 10…31.2V DC<br>(5% ripple) | | | | 4.5...5.5V DC<br>(includes 50 mV p-p ripple) | 30…60V DC<br>(5% ripple) |
| External DC supply current range | 10…35 mA | 20…65 mA | | 50 mA | 100 mA @ 5V DC | 13…27 mA |
| Power dissipation, max | 3.3 W @ 31.2V DC | 5.3 W @ 31.2V DC | 4.2 W @ 31.2V DC | 4.4 W @ 31.2V DC | 0.8 W @ 5.5V DC | 3.7 W @ 60V DC |
| Thermal dissipation, max | 11.2 BTU/hr @31.2V DC | 18.1 BTU/hr @31.2V DC | 14.3 BTU/hr @ 31.2V DC | 8.53 BTU/hr @ 31.2V DC | 3.41 BTU/hr @ 5.5V DC | 12.6 BTU/hr @ 60V DC |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed | | | | | |
| Isolation voltage | 50V continuous, I/O to system<br>Tested to 850V DC for 1 s, I/O to system<br>No isolation between individual channels | | 50V continuous<br>Tested 1770V DC for 60 s, I/O to system<br>No isolation between individual channels | 50V (continuous), Basic Insulation Type, between field side and system<br>Type tested at 707V DC for 60 s, between field side and system<br>No isolation between individual channels | | 75V continuous, I/O to system<br>Tested to 1900V DC for 1 s, I/O to system<br>(No isolation between individual channels) |

(1) OFF to ON delay is the time from a valid output ON signal to output energization. ON to OFF delay is the time from a valid output OFF signal to output de-energization.

## FLEX I/O Digital DC Protected Output Modules

- 1794-OB16P provides 16 sourcing 1/2 Amp outputs self-protected against shorts, overloads, and over temperature. The faulted output will automatically return when the fault is removed. No feedback to the processor is provided.
- 1794-OB16PXT is the extended temperature version of the 1794-OB16P module. The module is conformal coated.
- 1794-OB8EP provides 8 sourcing 2 Amp outputs with electronic fuse type of overload protection, which opens when overloaded. The fuse can be 'reset' several ways. Fault status is provided to the processor.
- 1794-OB8EPXT is the extended temperature version of the 1794-OB8EP module. The module is conformal coated.
- 1794-OB32P provides 32 self-protected sourcing 1/2 Amp outputs in 2 groups of 16 outputs. Separate voltage sources can be used with each group.
- 1794-OV16P is the sinking version of the 1794-OB16P.

**Digital DC Protected Output Comparison**

| Specification | 1794-OB16P, 1794-OB16PXT | 1794-OB8EP, 1794-OB8EPXT | 1794-OB32P | 1794-OV16P |
|---|---|---|---|---|
| Voltage, on-state output, nom | 24V DC, sourcing | | | 24V DC, sinking |
| Voltage, on-state output, min | 10V DC | 19V.2 DC | 10V DC | |
| Voltage, on-state output, max | 31.2V DC(1) | 31.2V DC | | |
| Voltage drop, on-state output, max | 0.5V DC | 0.2V DC | 0.5V DC | 0.2V DC |
| Terminal base unit | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBN, 1794-TB3K, 1794-TB3SK, 1794-TBNK | 1794-TB32, 1794-TB32S | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK |
| Current on-state output, min | 1.0 mA per channel | | | |
| Current, on-state output, max | 500 mA per channel, 8 A per module | 2.0 A per channel, 10 A per module | 500 mA per channel, 14 A per module(2) | 500 mA per channel, 8 A per module |
| Leakage current, off-state output, max | 0.5 mA | | | |
| Output surge current, max | 1.5 A for 50 ms, repeatable every 2 s | 4 A for 50 ms, repeatable every 3 s | 2 A for 50 ms, repeatable every 2 s | |
| Output delay time, OFF to ON, max | 0.5 ms | 0.1 ms | 0.5 ms | |
| Output delay time, ON to OFF, max | 1.0 ms | 0.1 ms | 1.0 ms | |
| External DC supply voltage range | 10…31.2V DC (5% AC ripple) | 19.2…31.2V DC (5% AC ripple) | 10…31.2V DC (5% AC ripple) | |
| External DC supply current range | 25…75 mA | 20…35 mA | 103…273 mA | 20…65 mA |
| Power dissipation, max | 5.0 W @ 31.2V DC | 5.5 W @ 31.2V DC | 5.3 W @ 31.2V DC | 4.2 W @ 31.2V DC |
| Thermal dissipation, max | 17.0 BTU/hr @ 31.2V DC | 18.8 BTU/hr @ 31.2V DC | 18.1 BTU/hr @ 31.2V DC | 14.3 BTU/hr @ 31.2V DC |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.) 94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed | | | |

### Digital DC Protected Output Comparison

| Specification | 1794-OB16P, 1794-OB16PXT | 1794-OB8EP, 1794-OB8EPXT | 1794-OB32P | 1794-OV16P |
|---|---|---|---|---|
| Isolation voltage | 50V (continuous), Basic Insulation Type<br>Type tested at 2121V DC for 60 s, between field side and system<br>No isolation between individual channels | 50V (continuous), Basic Insulation Type<br>Type tested at 850V DC for 60 s, between field side and system<br>**1794-OB8EPXT:** Type tested at 1500V AC for 60 s, between field side and system<br>No isolation between individual channels | | 50V (continuous), Basic Insulation Type<br>Type tested at 1770V DC for 60 s, between field side and system<br>No isolation between individual channels |

(1) See 1794-OB16P Derating Curve.

(2) 6.0 A total for channels 0…15; 8.0 A total for channels 16…31.

**1794-OB16P Derating Curve**

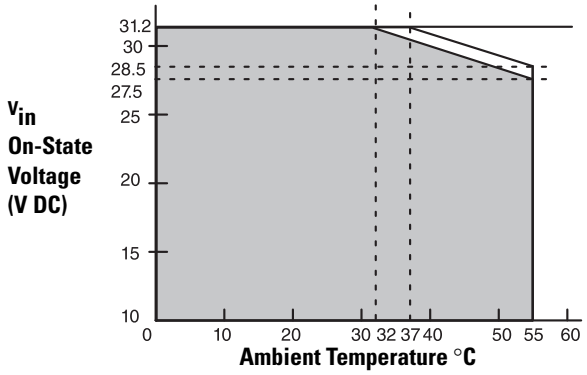


The area within the curve represents the safe operating range for the module under various conditions of user supplied 24V DC supply voltages and ambient temperatures.

= Normal mounting safe operating range included
= Other mounting positions (including inverted horizontal, vertical) safe operating range

**1794-OB8EP Output Minimum Surge**

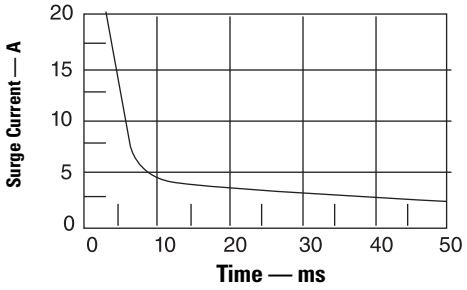

## FLEX I/O Digital DC Diagnostic Modules

1794-IB16D is the diagnostic version of the 1794-IB16.

1794-OB16D is the diagnostic version of the 1794-OB16.

The modules can detect open wire, short circuit, and reverse polarity of external power. When the module detects a fault, the module fault LED status indicator lights up, the corresponding red channel LED status indicator lights up, and the corresponding module error bit (open wire, short circuit, or reverse power bit) is set. The reporting function provides results of the diagnostics as bits in its data table.

The modules have 16-bi-color channel LED status indicators and one red module status indicator. These indicators are driven from the customer field side power.

**Digital DC Diagnostic Input Module**

| Specification | 1794-IB16D |
|---|---|
| Voltage, on-state input, min | 10V DC, sinking |
| Voltage, on-state input, nom | 24V DC |
| Voltage, on-state input, max | 31.2 DC(1) |
| Voltage, off-state input, max | 5.0V DC |
| Current, on-state input, nom | 8.2 mA @ 24V DC |
| Current, on-state input, max | 12.1 mA @ 31.2V DC |
| Terminal base unit | 1794-TB32, 1794-TB32S |
| Input impedance, max. | 3.1 kΩ |
| Current, on-state input, min | 2.0 mA @ 10V DC |
| Current, off-state input, max | 1.5 mA |
| Power dissipation, max | 8.5 W @ 31.2V DC |
| Thermal dissipation, max | 29 BTU/hr @ 31.2V DC |
| Detected reverse polarity voltage | 10V min(2) |
| Sensor voltage drop, max | 2.2V DC |
| Current, sensor source, max | 50 mA |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Isolation voltage | 50V continuous, I/O to system<br>Tested to 2121V DC for 1 s, I/O to system<br>No isolation between individual channels |

(1) See 1794-IB16D Derating Curves.

(2) Module must detect if the reverse polarity external power supply voltage is greater than the value.

### Digital DC Diagnostic Output Module

| Specification | 1794-OB16D |
|---|---|
| Voltage, on-state output, min | 10V DC, sinking |
| Voltage, on-state output, max | 31.2 DC |
| Voltage drop, on-state output, max | 0.5V DC @ 0.5 A |
| Terminal base unit | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK |
| Current, on-state output, min | 2.0 mA per channel |
| Current, on-state output, max | 500 mA per channel<br>8 A per module |
| Leakage current, off-state output, max | 0.5 mA |
| Output surge current, max | 2 A for 50 ms, repeatable every 2 s |
| External DC supply voltage range | 10…31.2V DC (5% AC ripple) |
| External DC supply current range | 56…78 mA |
| Power dissipation, max | 4.8 W @ 31.2V DC |
| Thermal dissipation, max | 16.4 BTU/hr @ 31.2V DC |
| Short circuit protection | Thermal shutdown (auto reset)(1) |
| Open wire detection, off-state leakage current | 0.1 mA(2) |
| Detect reverse polarity voltage, min | 10V(3) |
| Current, sensor source, max | Yes |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Isolation voltage | 50V continuous, I/O to system<br>Tested to 2121V DC for 1 s, I/O to system<br>No isolation between individual channels |

(1) Short circuit protection detection condition: when external power active, output signal active, and output port voltage less than 2V.

(2) When external power active and output signal inactive

(3) Module must detect if the reverse polarity external power supply voltage is greater than the value.

### 1794-IB16D Derating Curves

**Input Voltage**

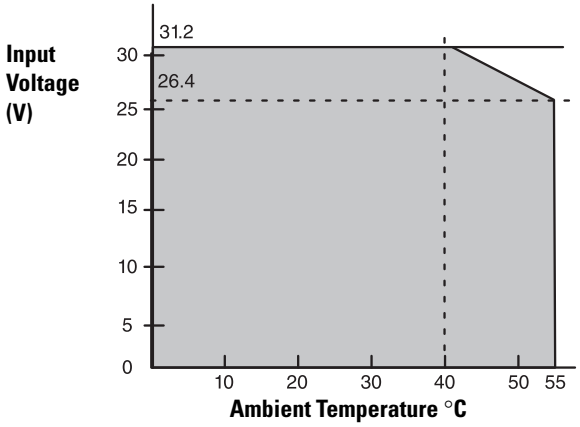


**Sensor Power**

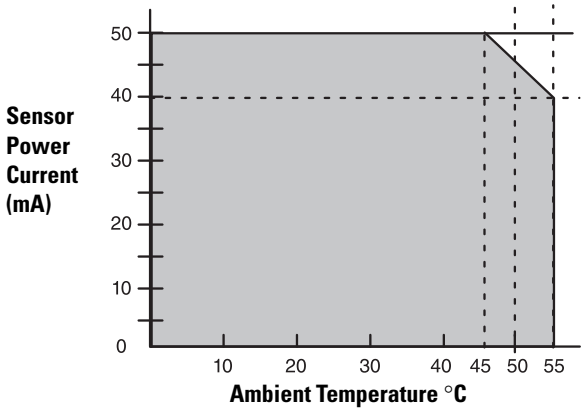

## FLEX I/O Digital DC Combination Modules

The 1794-IB16XOB16P module has outputs that are self-protected against shorts, overload, and over temperature similar to the 1794-OB16P module.

The 1794-IB10XOB6 module requires the use of external fusing for individual outputs.

The 1794-IB10XOB6XT module is the extended temperature version of the 1794-IB10XOB6 module.

**Digital DC Combination Modules**

| Specification | 1794-IB10XOB6, 1794-IB10XOB6XT[2] | 1794-IB16XOB16P[3] |
|---|---|---|
| Terminal base unit | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | 1794-TB32, 1794-TB32S |
| Isolation voltage | 50V (continuous), Basic Insulation Type<br>Type tested at 1250V AC for 60 s, between field side and system<br>Routine tested at 2121V DC for 1 s, between field side and system<br>No isolation between individual channels | 50V (continuous), Basic Insulation Type<br>Tested at 2121V DC for 1 s, system to I/O and inputs to outputs |
| Power dissipation, max | 6.0 W @ 31.2V DC | 7.0 W @ 31.2V DC |
| Thermal dissipation, max | 20.3 BTU/hr @ 31.2V DC | 23.9 BTU/hr @ 31.2V DC |
| Number of inputs | 10 | 16 |
| Voltage, on-state input, min | 10V DC | |
| Voltage, on-state input, nom | 24V DC | |
| Voltage, on-state input, max | 31.2V DC | |
| Current, on-state input, min | 2.0 mA | |
| Current, on-state input, nom | 8.0 mA @ 24V DC | |
| Current, on-state input, max | 11.0 mA | 12.1 mA |
| Voltage, off-state input, max | 5V DC | |
| Current, off-state input, max | 1.5 mA | |
| Input impedance, max | 4.8 kΩ | 2.5 kΩ |
| Number of outputs | 6 | 16 |
| Voltage, on-state output, min | 10V DC | |
| Voltage, on-state output, nom | 24V DC | |
| Voltage, on-state output, max | 31.2V DC | |
| Voltage drop, on-state output, max | 1V DC @ 2 A<br>0.5V DC @ 1 A | 0.5V DC @ 0.5 A |
| Current, on-state output, min | 1.0 mA per channel | |
| Current, on-state output, max | 2.0 A per channel<br>10 A per module | 0.5 A per channel<br>8 A per module |

**Digital DC Combination Modules**

| Specification | 1794-IB10XOB6, 1794-IB10XOB6XT[2] | 1794-IB16XOB16P[3] |
|---|---|---|
| Voltage, off-state output, max | 31.2V DC | |
| Leakage current, off-state output, max | 0.5 mA | |
| Output delay time, OFF to ON, max[1] | 0.5 ms | |
| Output delay time, ON to OFF, max | 1.0 ms | |
| Output surge current, max | 4 A for 50 ms<br>repeatable every 2 s | 1.5 A for 50 ms<br>repeatable every 2 s |
| Voltage, off-state input, max | 5.0V DC | |
| Current, on-state input, min | 7.1 mA | 5.5 mA @ 74V AC, 47 Hz |
| Current, off-state input, min | 1.5 mA | |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed | |
| External DC supply voltage range | 10…31.2V DC<br>(includes 5% AC ripple) | |
| External DC supply current range | 8 mA @ 10V DC<br>15 mA @ 19.2V DC<br>19 mA @ 24V DC<br>25 mA @ 31.2V DC | 78 mA @ 10V DC |

(1) Output OFF to ON or ON to OFF delay is the time from the module issuing an output on or off until the output actually turns on or off

(2) Module outputs are not fused. Fusing is recommended. If fusing is desired, you must supply external fusing. Use SAN-O MQ4-3A or Littelfuse 235-003.

(3) Outputs are electronically protected against overloads and shorts.

## FLEX I/O Digital Contact Output Modules (Relay)

The 1794-OW8 module provides 8 isolated Form A (normally open) contacts capable of switching up to 2 A at up to 230V AC and 125V DC.

Do not attempt to increase load current or wattage capability beyond the maximum rating by connecting two or more outputs in parallel. The slightest variation in relay switching time may cause one relay to momentarily switch the total load current. Apply only +24V DC power to the power terminals on the terminal base. Make certain that all relay wiring is properly connected before applying any power to the module.

Total current draw through the terminal base unit is limited to 10 A. Separate power connections to the terminal base unit may be necessary.

The use of external fuses or a fused terminal base is required for individual outputs.

The 1794-OW8XT module is the extended temperature version of the 1794-OW8 module. The module is conformal coated.

**Digital Contact Output Modules**

| Specification | 1794-OW8, 1794-OW8XT |
|---|---|
| Number of outputs | 8 |
| Terminal base unit | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TBN, 1794-TBNF, 1794-TB3K, 1794-TB3SK, 1794-TBNKF |
| External DC supply voltage range | 19.2…31.2V DC<br>(includes 5% AC ripple) |
| External DC supply current, nom | 125 mA |
| Leakage current, off-state output, max | 1 mA @ 240V AC (through a snubber) |
| Output delay time, OFF to ON, max | 10 ms(1) |
| Output delay time, ON to OFF, max | 10 ms(2) |
| Relay output current rating, resistive | 2.0 A @ 5…30V DC<br>0.22 A @ 125V DC<br>2.0 A @ 125V AC<br>2.0 A @ 250V AC |
| Relay output current rating, inductive | 0.98 A steady state @ 5…30V DC, L/R = 7ms<br>0.5 A steady state @ 48V DC, L/R = 7ms<br>0.22 A steady state @ 125V DC, L/R = 7ms<br>2.0 A steady state, 15 A make @ 120V AC, PF = cos $\theta$ = 0.35<br>2.0 A steady state, 7.5A make @ 240V AC, PF = cos $\theta$ = 0.35 |
| Contact resistance, initial | 30 m$\Omega$ |
| Switching frequency | 0.3 Hz (1 operation every 3 s) |
| Bounce time, mean | 1.2 ms |
| Contact load, min | 100 µA @ 100 mV DC |
| Mechanical life | 100,000 operations at rated loads |
| Fusing | 3.0 A. 250V AC slow blow fuse (Littelfuse part number 239003). |
| Power dissipation, max | 5.5 W @ 31.2V DC |
| Thermal dissipation, max | 18.8 BTU/hr @ 31.2V DC |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Isolation voltage | 250V (continuous), Basic Insulation Type, relay to relay, relay to backplane, and relay to power<br>50V (continuous), Basic Insulation Type, power to backplane<br>Type tested at 1500V AC for 60 s, relay to relay, all combinations.<br>Type tested at 3250V DC for 60 s, relay to backplane and relay to power<br>Type tested at 720V DC for 60 s, power to backplane. |

(1) time from valid output on signal to relay energization by module.

(2) time from valid output off signal to relay deenergization by module.

## FLEX I/O Analog, Thermocouple and RTD Modules

Choose analog, thermocouple, or RTD I/O modules when you need:

- **Individually configurable channels** allow the module to be used with a variety of sensors.
- **On-line configuration**. Modules can be configured in RUN mode using programming software or the control program. This allows you to change configuration while the system is operating.
- **Selectable input filters** on many modules allow you to select from several different filter frequencies for each channel that best meets the performance needs of your application. Lower filter settings provide greater noise rejection and resolution. Higher filter settings provide faster performance. *Note: Isolated analog modules have four filter selections; the thermocouple module has ten; and the combined RTD/thermocouple module has eight.*
- **Ability to direct output device operation during an abnormal condition.**
  Each channel of the output module can be individually configured to hold its last value or assume a user-defined value on either a run-to-program or run-to-fault condition. This feature allows you to set the condition of your analog devices, and therefore your control process, which may help to ensure a reliable shutdown.
- **Selectable response to broken input sensor.** This feature provides feedback to the controller that a field device is not connected. This allows you to specify corrective action based on the channel condition.
- **Single-ended or differential inputs depending on module.** Analog modules have single-ended inputs while isolated analog and temperature modules have differential inputs. Single-ended voltage sensors reduce costs. Differential inputs are more expensive, but are typically more noise immune.
- **Over- and under-range detection and indication** are available with most modules. This eliminates the need to test values in the control program. While standard analog modules have limited diagnostics, temperature and isolated analog modules provide over-range, under-range, and wire-off diagnostics with alarm bits.
- **On-board scaling** is performed by the temperature modules and is user configurable for either °C, °F, °K, Ohms, or mV. This eliminates the need to scale the data in the user program.
- **Accuracy and resolution varies by module** and the associated application. Specifications are given for each module at it's operational conditions.
- **Internal calibration is performed** in the analog modules (1794-IE8, 1794-OE4, and 1794-IE4XOE2). User calibration is recommended (yearly) for isolated analog and temperature modules. All modules come factory calibrated.

### Analog I/O Module Summary

| Catalog Number | Inputs | Outputs | Terminal Base Unit | Module Type |
|---|---|---|---|---|
| 1794-IE8 | 8 | — | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3T, 1794-TB3TS, 1794-TB3K, 1794-TB3SK, 1794-TB3TK, 1794-TB3TSK | Selectable, non-isolated inputs |
| 1794-IE8XT | | | | Selectable, non-isolated inputs, Extended temperatures |
| 1794-IE8H | | | 1794-TB3G, 1794-TB3GS, 1794-TB3GK, 1794-TB3GSK | Single-ended, non-isolated, HART-enabled inputs |
| 1794-IE12 | 12 | | | Single-ended inputs |
| 1794-IF4I | 4 | — | 1794-TBN, 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3T, 1794-TB3TS, 1794-TBNK, 1794-TB3K, 1794-TB3SK, 1794-TB3TK, 1794-TB3TSK | Single-ended, isolated inputs |
| 1794-IF4IXT | | | | Single-ended inputs, Isolated, Extended temperatures |
| 1794-IF8IH | 8 | — | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | Single-ended, isolated, HART-enabled inputs |
| 1794-IR8 | | | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3T, 1794-TB3TS, 1794-TBKD, 1794-TB3K, 1794-TB3SK, 1794-TB3TK, 1794-TB3TSK | Non-isolated relay inputs |
| 1794-IRT8 | | | 1794-TB3G, 1794-TB3GS, 1794-TB3GK, 1794-TB3GSK | Non-isolated RTD/Thermocouple inputs |
| 1794-IRT8XT | | | | Non-isolated RTD/Thermocouple inputs, Extended temperatures |
| 1794-IT8 | | | 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3T, 1794-TB3TS, 1794-TB3K, 1794-TB3SK, 1794-TB3TK, 1794-TB3TSK[3] | Non-isolated, Thermocouple, Millivolt inputs |
| 1794-IE4XOE2 | 4 | 2 | | Single-ended, non-isolated I/O |
| 1794-IE4XOE2XT | | | | Single-ended, non-isolated I/O, Extended temperatures |
| 1794-IE8XOE4 | 8 | 4 | 1794-TB3G, 1794-TB3GS, 1794-TB3GK, 1794-TB3GSK | Single-ended, non-isolated I/O |
| 1794-IF2XOF2I | 2 | 2 | 1794-TBN, 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3T, 1794-TB3TS, 1794-TBNK, 1794-TB3K, 1794-TB3SK, 1794-TB3TK, 1794-TB3TSK | |
| 1794-IF2XOF2IXT | | | | Single-ended, non-isolated I/O, Extended temperatures |
| 1794-OE4 | — | 4 | | Selectable, non-isolated outputs |
| 1794-OE4XT | | | | Selectable, non-isolated outputs, Extended temperatures |
| 1794-OE8H[1] | | 8 | 1794-TB3G, 1794-TB3GS, 1794-TB3GK, 1794-TB3GSK | Single-ended, non-isolated, HART-enabled outputs |
| 1794-OE12[2] | | 12 | | Single-ended, non-isolated outputs |
| 1794-OF4I | | 4 | 1794-TBN, 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3T, 1794-TB3TS, 1794-TBNK, 1794-TB3K, 1794-TB3SK, 1794-TB3TK, 1794-TB3TSK | Source isolated outputs |
| 1794-OF4IXT | | | | Source isolated outputs, Extended temperatures |
| 1794-OF8IH | | 8 | 1794-TB3, 1794-TB3S, 1794-TB3K, 1794-TB3SK | Single-ended, isolated, HART-enabled outputs |

(1) Do not exceed length of 30 m (100 ft) for signal cabling.

(2) Not supported by 1747-SN or 1747-BSN for use on RIO with SLC controllers.

(3) 1794-TB2, 1794-TB3, 1794-TB3S for mV inputs only.

# Modules Specifications

The following section shows more detailed module specifications in comparative groups to facilitate your selection based on your requirements.

## FLEX I/O Analog Input Modules

### Analog Input Comparison

| Catalog Number | Input Signal Range | Accuracy Drift with Temperature | External DC Supply Current, Nom | Power Dissipation, Max | Thermal Dissipation, Max |
|---|---|---|---|---|---|
| 1794-IE8(1)<br>1794-IE8XT | 4…20 mA<br>0…20 mA<br>±10V<br>0…10V | Current Input: 0.0407% Full Scale/°C<br>Voltage Input: 0.0428% Full Scale/°C | 60 mA @ 24V DC | 3 W @ 31.2V DC | 10.2 BTU/hr @ 31.2V DC |
| 1794-IE8H | 4…20 mA | 0.05%/°C of output signal range | 295 mA @ 24V DC | 3.9 W | 13.5 BTU/hr |
| 1794-IE12 | 4…20 mA (user configurable)<br>0…20 mA (user configurable) | Current Input: 0.004% Full Scale/°C<br>Voltage Input: 0.004% Full Scale/°C | 30 mA @ 24V DC;<br>45 mA @ 10.0V DC | 1.2 W @ 31.2V DC;<br>1.1 W @ 24V DC;<br>0.9 W @ 10.0V DC | 4.1 BTU/hr @ 31.2V DC |
| 1794-IF4I(1)<br>1794-IF4IXT<br>1794-IF4CFXT | 4…20 mA<br>0…20 mA<br>±20 mA<br>±10V<br>0…10V<br>±5V<br>0…5V | Current Input: 0.0038% Full Scale/°C<br>Voltage Input: 0.0028% Full Scale/°C | 80 mA @ 24V DC | 2.0 W @ 31.2V DC | 6.9 BTU/hr @ 31.2V DC<br>6.8 BTU/hr @ 31.2V DC |
| 1794-IF8IH | 4…20 mA (user configurable)<br>0…20 mA (user configurable) | 0.4% Full Scale for 0 °C…55 °C | 190 mA @ 24V DC | 4.8 W @ 31.2V DC | 6.8 BTU/hr @ 31.2V DC |
| 1794-IR8(1(2)) | 1…433 Ω | Normal mode:<br>0.05% Full Scale (max)<br>Enhanced mode:<br>0.01% Full Scale (typical) | 140 mA @ 24V DC | 3 W @ 31.2V DC | 10.2 BTU/hr @ 31.2V DC |
| 1794-IRT8 (1)(2) | -40…100 mV DC for thermocouples<br>0…325 mV DC for RTDs<br>0…500 Ω for resistance range | Hardware only in mV mode:<br>0.10% Full Scale<br>mV mode with filtering:<br>0.05% Full Scale | 85 mA @ 24V DC | | |
| 1794-IRT8XT | | | 95 mA @ 24V DC | | |
| 1794-IT8(1)(2) | ±76.5 mV | | 150 mA @ 24V DC | | |
| 1794-IE8XOE4 | 4…20 mA (user configurable)<br>0…20 mA (user configurable) | Current Input or Output:<br>0.004% Full Scale @ 25 °C<br>Voltage Input or Output:<br>0.004% Full Scale @ 25 °C | 140 mA @ 24V DC;<br>280 mA @ 10.0V DC | 3.0 W @ 31.2V DC;<br>2.3 W @ 24V DC;<br>2.0 W @ 10.0V DC | 10.3 BTU/hr @ 31.2V DC |
| 1794-IE4XOE2(1)<br>1794-IE4XOE2XT | 4…20 mA<br>0…20 mA<br>±10V<br>0…10V | Current Input: 0.0407% Full Scale/°C<br>Voltage Input: 0.0428% Full Scale/°C<br>Current Output: 0.0069% Full Scale/°C<br>Voltage Output: 0.0045% Full Scale/°C | 70 mA @ 24V DC<br>164 mA @ 10.5V DC | 4.0 W @ 31.2V DC | 13.6 BTU/hr @ 31.2V DC<br>15.3 BTU/hr @ 31.2V DC |
| 1794-IF2XOF2I(1)<br>1794-IF2XOF2IXT | 4…20 mA<br>0…20 mA<br>±20 mA<br>±10V<br>0…10V<br>±5V<br>0…5V | Current Input: 0.0038% Full Scale/°C<br>Voltage Input: 0.0028% Full Scale/°C<br>Current Output: 0.0025% Full Scale/°C<br>Voltage Output: 0.0012% Full Scale/°C | 150 mA @ 24V DC | 3.3 W @ 31.2V DC<br>2.0 W @ 31.2V DC | 11 BTU/hr @ 31.2V DC<br>6.8 BTU/hr @ 31.2V DC |

(1) Each module's channel is individually selectable or as a group of four.

(2) For the accuracy calculation, refer to the module's user manual.

## 1794-IE8 and 1794-IE8XT Analog 8 Input Module

The 1794-IE8 is a voltage/current measurement module that works with a variety of input sensors to measure input voltage in ±10V range or input current in the 0...20 mA range. Each channel is individually configurable for the desired input range. Use the 1794-IE8 with 2-, 3-, and 4-wire input sensor field devices.

The 1794-IE8XT module is the extended temperature version of the 1794-IE8 module. The module is conformal coated.

**IMPORTANT** Only connect either a voltage input or a current input per channel, not both.

Use caution to prevent ground loops when using a common ground, since the channels are not isolated.

### Analog 8 Input Modules

| Specification | 1794-IE8 and 1794-IE8XT |
|---|---|
| Voltage, input, max overload | 30V, single channel, continuous |
| Current, input, max overload | 32 mA, single channel, continuous |
| Input impedance, nom | Current Input: 238 Ω<br>Voltage Input: 100 kΩ |
| Input resolution | 12 bits – unipolar<br>11 bits + sign – bipolar<br>5.13 µA/cnt<br>2.56 mV/cnt – unipolar<br>5.13 mV/cnt – bipolar |
| Data format | 16-bit 2's complement, left-justified |
| Input conversion type | Successive approximation |
| Input conversion rate | 256 µs all channels |
| Normal mode rejection ratio | Current input:<br>-3 dB @ 9 Hz; -20 dB/decade<br>-15.3 dB @ 50 Hz<br>-16.8 dB @ 60 Hz<br>Voltage input:<br>-3 dB @ 17 Hz; -20 dB/decade<br>-10 dB @ 50 Hz<br>-11.4 dB @ 60 Hz |
| Calibration | None required |
| Step response to 63% of FS, input | Current input: 18.2 ms<br>Voltage input: 9.4 ms |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Accuracy | Current input: 0.20% Full Scale @ 25 °C (77 °F)<br>Voltage input: 0.20% Full Scale @ 25 °C (77 °F)(1) |
| Temperature, operating | **1794-IEI8:** 0…55 °C (32…131 °F)<br>**1794-IE8XT:** -20…70 °C (-4…185 °F) |

(1) Includes offset, gain, non-linearity, and repeatability error terms

## 1794-IE8H HART Enabled Analog 8 Input Module

The 1794-IE8H is a HART enabled analog input module that works with HART enabled input sensors with input current in the 0...20 mA range. Use the 1794-IE8H with 2 or 3 wire transmitters. This module provides wire-off detection on a per-channel basis. The HART analog module can only be used on ControlNet or EtherNet/IP networks with one HART field device per channel.

**HART Enabled Analog 8 Input Module**

| Specification | 1794-IE8H |
|---|---|
| Voltage, input, max overload | — |
| Current, input, max overload | — |
| Isolation voltage | 50V (continuous), Basic Insulation Type<br>No isolation between individual channels |
| Input resolution | 16 bits |
| Input resistance | — |
| Data format | Configurable |
| Input conversion type | — |
| Input conversion rate | 10 ms (50 Hz)<br>8.33 ms (60 Hz) |
| Normal mode rejection ratio | — |
| Step response to 99% of FS, input | 80 ms |
| Calibration | — |
| Dimensions (HxWxD), approx | 46 x 94 x 75 mm (1.8 x 3.7 x 2.9 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |
| Resolution | 16 bit |
| Accuracy | Current input: 0.1% Full Scale @ 20 °C (68 °F) |

## 1794-IE12 Analog 12 Input Module

The 1794-IE12 is a voltage or current measurement module that measures input voltage in a ±10V range or current in the 0...20 mA range. Each channel is individually configurable and the out-of-range notification is by channel.

**Analog 12 Input Module**

| Specification | 1794-IE12 |
|---|---|
| Voltage, input, max overload | 30 continuous, single channel |
| Current, input, max overload | 32 mA continuous, single channel |
| Isolation voltage | 50 (continuous), Basic Insulation Type<br>Type tested at 850V DC for 60 s, between field side and system<br>No isolation between individual channels |
| Input resolution | 320 μV/cnt<br>0.641μA/cnt |

**Analog 12 Input Module**

| Specification | 1794-IE12 |
|---|---|
| Input resistance | Current input: <100 Ω<br>Voltage input: >1 MΩ |
| Data format | 16 bits, 2's complement |
| Input conversion type | Successive approximation |
| Input conversion rate | 8.0 ms all channels |
| Normal mode rejection ratio | Voltage/current terminal:<br>-3 dB @ 0.05 Hz<br>-20 dB/decade<br>-52 dB @ 50 Hz<br>-54 dB @ 60 Hz<br>Voltage/current terminal with Quick Step:<br>-3 dB @ 1.5 Hz; -20 dB/decade<br>-29 dB @ 50 Hz<br>-31 dB @ 60 Hz |
| Step response to 63% of FS, input | Current or voltage input: 1.3 s (0.09 s with Quick Step) |
| Calibration | None required |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Resolution | 16 bit unipolar<br>15 bit + bipolar |
| Accuracy | Current input: 0.1% Full Scale @ 25 °C (77 °F)<br>Voltage input: 0.1% Full Scale @ 25 °C (77 °F)(1) |

(1) Includes offset, gain, non-linearity, and repeatability error terms

## 1794-IF4I and 1794-IF4IXT Isolated Analog 4 Input Module

The 1794-IF4I and 1794-IF4IXT are input modules with channel-to-channel isolation that work with a variety of input sensors to measure input voltage in ±10V range or input current in the 0...20 mA range. Each channel is individually configurable for the desired input range. Use the 1794-IF4I or 1794-IF4IXT with 2-, 3-, and 4-wire input sensor field devices.

The 1794-IF4IXT is the extended temperature version of the 1794-IF4I module.

Settings to these parameters affect all inputs set to 150 Hz, 300 Hz, or 600 Hz. The parameters do not affect channels set at 1200 Hz.

**IMPORTANT** Only connect either a voltage input or a current input per channel, not both.

**Isolated Analog Input Modules**

| Specification | 1794-IF4I, 1794-IF4IXT |
|---|---|
| Voltage, input, max overload | 30V, single channel, continuous |
| Current, input, max overload | 32 mA, single channel, continuous |

### Isolated Analog Input Modules

| Specification | 1794-IF4I, 1794-IF4IXT |
|---|---|
| Input resolution | 16 bits – unipolar<br>15 bits + sign – bipolar<br>0.320 μA/cnt – unipolar<br>0.640 μA/cnt – bipolar<br>0.156 mV/cnt – unipolar<br>0.313 mV/cnt – bipolar |
| Input resistance | Current input: <100 Ω(1)<br>Voltage input: >10 MΩ |
| Data format | 2's complement<br>2's complement percent<br>binary<br>offset binary |
| Input conversion type | Sigma Delta |
| Input conversion rate | 2.5/5.0/7.5 ms all channels |
| Normal mode rejection ratio | -3 dB @ 12 Hz (300 Hz conversion rate)<br>-80.0 db @ 50 Hz (300 Hz conversion rate) |
| Calibration | Factory calibrated(2) |
| Step response to 63% of FS, input | Current or voltage input:<br>1200 Hz conversion rate = 0.6 ms<br>600 Hz conversion rate = 6.7 ms<br>300 Hz conversion rate = 13.4 ms<br>150 Hz conversion rate = 26.7 ms |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Resolution | 16 bit unipolar<br>15 bit + bipolar |
| Accuracy | Current input: 0.1% Full Scale @ 25 °C (77 °F)<br>Voltage input: 0.1% Full Scale @ 25 °C (77 °F)(3) |
| Temperature, operating | **1794-IF4I:** 0…55 °C (32…131 °F)<br>**1794-IF4IXT:** -20…70 °C (-4…185 °F) |

(1) If 24V DC is removed from the module, input resistance = 10 kΩ.

(2) Can be calibrated in field when necessary.

(3) Includes offset, gain, non-linearity, and repeatability error terms

## 1794-IF8IH HART Enabled Analog 8 Input Module

The 1794-IF8IH accepts up to 8 analog inputs. The inputs are isolated and will accept current in either of the following two ranges: 4...20 mA or 0...20 mA. The default input range is 0...20 mA. The inputs have both fixed hardware filters and selectable firmware digital filters.

**HART Enabled Analog 8 Input Module**

| Specification | 1794-IF8IH |
|---|---|
| Current input, max overload | 32 mA DC continuous, for any or all channels |
| Isolation voltage | 120V (continuous), Basic Insulation Type<br>Type tested @ 1000V AC for 60 s, between user power to system, channel to system, and channel to channel |
| Input resolution | 16 bits – unipolar<br>15 bits + sign – bipolar<br>0.320 μA/cnt unipolar<br>0.640 μA/cnt bipolar |
| Input resistance | 249 Ω ±1% |
| Data format | Engineering Units<br>Percent of Full Scale<br>Proportional Count |
| Input conversion type | Sigma Delta Analog to Digital Converter |
| Normal mode rejection ratio | > 70 dB @ 50/60 Hz (4.17 Hz ADC conversion rate)<br>> 65 dB @ 50/60 Hz (10.0 Hz ADC conversion rate)<br>> 75 dB @ 50 Hz (16.7 Hz ADC conversion rate)<br>> 85 dB @ 60 Hz (19.6 Hz ADC conversion rate) |
| Calibration | Factory calibrated(1) |
| Step response to 63% of FS, input | 4.17 Hz conversion rate = 480 ms<br>10.0 Hz conversion rate = 200 ms<br>16.7 Hz conversion rate = 120 ms<br>19.6 Hz conversion rate = 101 ms<br>62 Hz conversion rate = 32 ms<br>470 Hz conversion rate = 4 ms |
| Dimensions (HxWxD), approx | 46 x 94 x 75 mm (1.8 x.7 x 2.9 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |
| Accuracy | 0.1% Full Scale @ 25 °C |

(1) Can be calibrated in field when necessary.

## 1794-IR8 RTD Input Module

The 1794-IR8 is a temperature-measuring module that accepts 2- and 3-wire RTDs. use the 1794-IR8 in applications where channel fast-update rate is not required. If you need channel fast-update rates, use the 1794-IRT8 module described on page 45.

**RTD Input Module**

| Specification | 1794-IR8 |
|---|---|
| Input resolution | 16 bits across 435 Ω |
| Sensors supported | Resistance:<br>100 Ω Pt μ = 0.00385 Euro (-200…870 °C)<br>100 Ω Pt μ = 0.003916 U.S. (-200…630 °C)<br>200 Ω Pt μ = 0.00385 Euro (-200…630 °C)<br>500 Ω Pt μ = 0.00385 U.S. (-200…630 °C)<br>100 Ω Nickel μ = 0.00618 (-60…250 °C)<br>120 Ω Nickel μ = 0.00672 (-60…250 °C)<br>200 Ω Nickel μ = 0.00618 (-60…250 °C)<br>500 Ω Nickel μ = 0.00618 (-60…250 °C)<br>10 Ω Copper μ = 0.00427 (-200…260 °C) |
| Data format | 16 bits, 2's complement, left justified;<br>Offset binary |
| Settling time | 100% of final value available at system throughput rate |
| Normal mode rejection ratio | 60 dB @ 60 Hz for A/D filter cutoff @ 15 Hz |
| Common mode rejection ratio | -120 db @ 60 Hz<br>-100 dB @ 50 Hz with A/D filter cutoff @ 10 Hz |
| Common mode voltage | 0V between channels (common return) |
| Accuracy, normal mode (max)(1) | 0.05% Full Scale (low humidity) without calibration |
| Accuracy, enhanced mode (typical) | 0.01% Full Scale (low humidity) without calibration |
| System throughput, normal mode | Programmable from 28…325 ms/channel<br>325 ms (1 channel scanned)<br>2.6 s (8 channels scanned) |
| System throughput, enhanced mode | Programmable from 56…650 ms/channel<br>650 ms (1 channel scanned)<br>2.925 s (8 channels scanned) |
| Open RTD detection | Out of range upscale reading |
| Open circuit detection type | Available at system throughput rate |
| Overvoltage capability | 35V DC, 25V AC continuous @ 25 °C<br>250V peak transient |
| Channel bandwidth | DC to 2.62 Hz (-3 dB) |
| RTD excitation current | 718.39 μA |
| RFI immunity | Error of <1% of range @ 10V/m, 27…1000 MHz |
| Gain drift with temperature | Normal mode: 20 ppm/ °C max<br>Enhanced mode: 10 ppm/ °C max |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Temperature, operating | 0…55 °C (32…131 °F) |

(1) The number is based on the hardware of the module only. Additional errors are introduced depending on the sensor used., environment, and other factors. Contact technical support for more information.

**1794-IR8 Derating Curve**

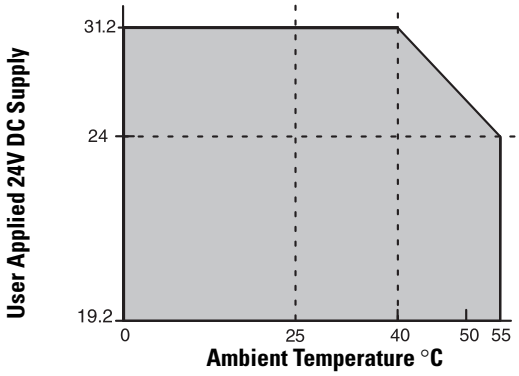


The area within the curve represents the safe operating range for the module under various conditions of user supplied 24V DC supply voltages and ambient temperatures.

= Safe operating area

## 1794-IRT8 and 1794-IRT8XT Thermocouple/RTD Input Module

The 1794-IRT8 is a high-speed, high-accuracy temperature/mV measuring module that accepts thermocouple inputs, 2-, 3-, and 4-wire RTD inputs, and mV source inputs.

The 1794-IRT8 offers the following:

- wire-off, over-range, and under-range detection
- good common mode rejection
- usage with long thermocouple wiring
- effective in noisy environments
- usage with grounded or ungrounded thermocouples
- more stability with ambient temperature changes than with the 1794-IR8 and the 1794-IT8

Release of Series B version provides capability to work with grounded thermocouples.

Use cold junction compensators 1794-CJC2 in thermocouple mode. Two cold junction compensators are shipped with the 1794-IRT8.

The 1794-IRT8XT is the extended temperature version of the 1794-IRT8 module. The module is conformal coated.

### Thermocouple/RTD Input Module

| Specification | 1794-IRT8 and 1794-IRT8XT |
|---|---|
| Input resolution | 14 bits |
| Supported RTD types | Resistance:<br>100 Ω Pt μ = 0.00385 Euro (-200…870 °C)<br>100 Ω Pt μ = 0.003916 U.S. (-200…630 °C)<br>200 Ω Pt μ = 0.00385 Euro (-200…400 °C)<br>200 Ω Pt μ = 0.003916 U.S. (-200…400 °C)<br>100 Ω Nickel μ = 0.00618 (-60…250 °C)<br>120 Ω Nickel μ = 0.00672 (-60…320 °C)<br>200 Ω Nickel μ = 0.00618 (-60…200 °C)<br>10 Ω Copper μ = 0.00427 (-200…260 °C) |
| Supported Thermocouple types | Type B: 300…1800 °C (572…3272 °F)<br>Type E: -270…1000 °C (-454…1832 °F)<br>Type J: -210…1200 °C (-346…2192 °F)<br>Type K: -270…1372°C (-454…2502 °F)<br>Type N: -270…1300°C (-454…2372 °F)<br>Type R: -50…1768°C (-58…3214 °F)<br>Type S: -50…1768°C (-58…3214 °F)<br>Type T: -270…400°C (-454…752 °F)<br>Type TXK/XK (L): -200…800°C (-328…1472 °F) |
| Accuracy | 0.05% of full range in mV mode with filtering selected<br>Hardware only = 0.10% of full rang in mV mode |
| Common mode rejection ratio | -80 dB @ 5V peak-to-peak 50…60 Hz |
| Common mode input range | Series A – ±4V<br>Series B – ±15V |
| System throughput | 7.4 ms – mV<br>8.0 ms – Ω – 2-wire<br>10.0 ms – Ω – 3-wire<br>10.4 ms – Ω – 4-wire<br>8.0 ms – Ω – 2-wire RTD (°F)<br>10.4 ms – Ω – 4-wire RDT (°F)<br>8.8 ms – Ω – 2-wire RDT (°C), (°K)<br>10.8 ms – Ω – 4-wire RDT (°C), (°K)<br>9.8 ms – Ω – 3-wire RDT (°F)<br>10.0 ms – Ω – 3-wire RDT (°C), (°K)<br>8.0 ms – Thermocouples (°F)<br>8.8 ms – Thermocouples (°C), (°K)[1] |
| Open circuit detection type | Series A: RTD and TC modes – open input – module defaults to max value<br>Series B: RTD mode – open input – module defaults to max value<br>Series B: TC mode – open input – module defaults to min value |
| Excitation current | 630 μA |
| Overvoltage capability | Series A: 7V DC continuous @ 25 °C<br>Series B: 15V DC continuous @ 25 °C |
| Open input detection time | 0…3.8 s for Series A, revision D or earlier<br>Immediate detection (max 2 scans) for Series A, revision E or later<br>Immediate detection (max 2 scans) for Series B |
| Cold junction compensation range | 0…70 °C for firmware Series A, revision D or earlier<br>-20…100 °C for firmware Series A, revision E or later<br>-20…100 °C for firmware Series B |
| Cold junction compensation | A-B Cold Junction Compensation Kit, 1794-CJC[2] |

**Thermocouple/RTD Input Module**

| Specification | 1794-IRT8 and 1794-IRT8XT |
|---|---|
| Data format | °C (implied decimal point XXX.X)<br>°F (implied decimal point XXX.X)<br>°K (implied decimal point XXX.X)<br>-32767…32767<br>0…65535<br>0…5000 (Ω mode) (implied decimal point XXX.X)<br>-4000…10000 (mV mode) (implied decimal point XXX.XX) |
| Overall drift with temperature, max | Series A: 150 ppm/ °C of span<br>Series B: 50 ppm/ °C of span |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Temperature, operating | **1794-IRT8:** -20…55 °C (-4…131 °F)<br>**1794-IRT8XT:** -20…70 °C (-4…185 °F) |

(1) For maximum throughput, short circuit all unused channels.

(2) Kit supplied with the module and contains 2 compensators.

## 1794-IT8 Thermocouple/mV Input Module

The 1794-IT8 module is a temperature/mV measuring module that accepts inputs from a variety of thermocouples and from the mV source in the range of ±76.5 mV. Choose the 1794-IT8 module when you need the following:

- A cost effective module.
- Applications that don't require high accuracy or high speed.
- Support for grounded or ungrounded thermocouples.

Use cold junction compensators (cat. no. 1794-CJC2) in thermocouple mode. Two cold junction compensators are shipped with the 1794-IT8 module. This module is suitable to work with grounded thermocouples, if certain guidelines are followed. Refer to the module's user manual for more information.

The FLEX I/O cold junction compensator kit, containing two compensators, is included with the 1794-IT8 module. You can order additional compensators using the above catalog number.

**Thermocouple/mV Input Module**

| Specification | 1794-IT8 |
|---|---|
| Input resolution | 16 bits (2.384 μV typical) |
| Supported Thermocouple types | Type B: 300…1800 °C (572…3272 °F)<br>Type C: 0…2315 °C (32…4199 °F)<br>Type E: -270…1000 °C (-454…1832 °F)<br>Type J: -210…1200 °C (-346…2192 °F)<br>Type K: -270…1372°C (-454…2502 °F)<br>Type N: -270…1300°C (-454…2372 °F)<br>Type R: -50…1768°C (-58…3214 °F)<br>Type S: -50…1768°C (-58…3214 °F)<br>Type T: -270…400°C (-454…752 °F)<br>Type TXK/XK (L): -200…800°C (-328…1472 °F) |

### Thermocouple/mV Input Module

| Specification | 1794-IT8 |
|---|---|
| Data format | 16 bits, 2's complement;<br>Offset binary (unipolar) |
| Settling time | 100% of final value available at system throughput rate |
| Normal mode rejection ratio | 60 dB @ 60 Hz |
| Common mode rejection ratio | -115 dB @ 60 Hz<br>-100 dB @ 50 Hz |
| Common mode input range | ± 10V |
| Accuracy(1) | With filter (max): 0.025% Full Scale @ 24 °C (±0.5 °C)<br>Without filter (max): 0.05% Full Scale @ 24 °C (±0.5 °C) |
| System throughput | 325 ms (1 channel scanned), programmable to 28 ms<br>2.6 s (8 channels scanned), programmable to 224 ms |
| Open input detection | Available at system throughput rate |
| Open circuit detection type | Out of range reading (upscale) |
| Overvoltage capability | 35V DC, 25V AC continuous @ 25 °C<br>250V peak transient |
| Channel bandwidth | 0…2.62 Hz (-3 dB) |
| RFI immunity | Error of <1% of range @ 10V/m, 27…1000 MHz |
| Input offset drift with temperature | +6 μV/°C max |
| Gain drift with temperature, max | 10 ppm/ °C |
| Overall drift with temperature, max | 50 ppm/ °C of span |
| Cold junction compensation range | 0…70 °C |
| Cold junction compensation | A-B Cold Junction Compensation Kit, 1794-CJC(2) |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |

(1) The number is based on the hardware of the module only. Refer to the user manual for the complete error calculation procedure.

(2) Kit supplied with the module and contains 2 compensators.

### 1794-IRT8 Derating Curve

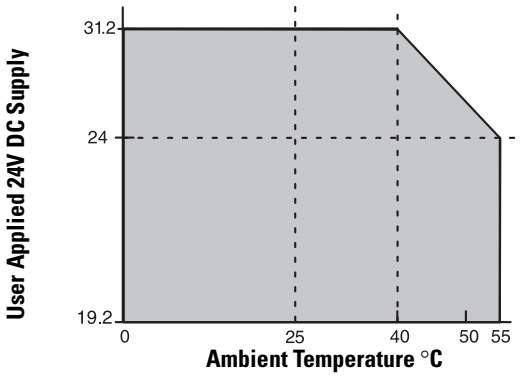


The area within the curve represents the safe operating range for the module under various conditions of user supplied 24V DC supply voltages and ambient temperatures.

= Safe operating area

## 1794-IE8XOE4 8 Input/4 Output Analog Combination Module

The 1794-IE8XOE4 is a combination module with 8 inputs and 4 outputs. Inputs can be configured individually for different modes, as can outputs. Inputs accept signals from 2, 3, and 4 wire input sensors in the ranges of ±10V or 0... 20 mA. Outputs produce signals in the range of ±10V or 0...20 mA.

**8 Input / 4 Output Analog Combination Module**

| Specification | 1794-IE8XOE4 |
|---|---|
| Calibration | None required |
| Input conversion type | Successive approximation |
| Input conversion rate | 8 ms all channels |
| Input resolution | 16 bit, 2's complement<br>320 μV/cnt<br>0.641 μA/cnt |
| Data format | 16 bits, 2's complement |
| Step response to 63% of FS, input | Current or voltage input: 1.3 s (0.09 s with Quick Step) |
| Step response to 63% of FS, output | -70% 1st convert<br>96% 2nd convert<br>100% 3rd convert |
| Normal mode rejection ratio | Voltage/current terminal:<br>-3 dB @ 0.05 Hz; -20 dB/decade<br>-52 dB @ 50 Hz<br>-54 dB @ 60 Hz<br>Voltage/current terminal with Quick Step:<br>-3 dB @ 1.5 Hz; -20 dB/decade<br>-29 dB @ 50 Hz<br>-31 dB @ 60 Hz |
| Accuracy(1) | Current input or output: 0.1% Full Scale @ 25 °C<br>Voltage input or output: 0.1% Full Scale @ 25 °C |
| Accuracy drift with temperature | Current input or output: 0.004% Full Scale @ 25 °C<br>Voltage input or output: 0.004% Full Scale @ 25 °C |
| Input impedance(2) | Current input: <100 Ω<br>Voltage input: >1 MΩ |
| Voltage input, overload, max | 30V, single channel, continuous |
| Output resolution | 16 bit, 2's complement<br>320 μV/cnt<br>0.641 μA/cnt |
| Output conversion type | Digital-to-analog converter |
| Output conversion rate | Outputs: DAC |
| Current load on voltage output, max | 3 mA |
| Resistive load on current output | 0…750 Ω over full power supply range |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |

(1) Includes offset, gain, non-linearity and repeatability error terms.

(2) If 24V DC is removed from the module, input resistance = 10 KΩ.

## 1794-IE4XOE2 and 1794-IE4XOE2XT 4 Input/2 Output Analog Combination Modules

The 1794-IE4XOE2 is a combination module with 4 inputs and 2 outputs. Inputs can be configured individually for different modes. Inputs accept signals from a variety of inputs sensors (2-, 3-, and 4-wire) in the range of ±10V or 0...20 mA. Outputs are also individually configurable for different modes. Outputs produce signals in the range of ±10V or 0...20 mA.

1794-IE4XOE2XT is the extended temperature version of the 1794-IE4XOE2.

**4 Input / 2 Output Analog Combination Modules**

| Specification | 1794-IE4XOE2, 1794-IE4XOE2XT |
|---|---|
| Calibration | None required |
| Input conversion type | Successive approximation |
| Input conversion rate | 256 μs all channels |
| Input resolution | 12 bits – unipolar<br>11 bits + sign – bipolar<br>5.13 μA/cnt<br>2.56 μV/cnt – unipolar<br>5.13 μV/cnt – bipolar |
| Data format | 16 bits, 2's complement; left-justified |
| Step response to 63% of FS, input | Current input: 18.2 ms<br>Voltage input: 9.4 ms |
| Step response to 63% of FS, output | Current or voltage output: 24 ms |
| Normal mode rejection ratio | Current input:<br>-3 dB @ 9 Hz; -20 dB/decade<br>-15.3 dB @ 50 Hz<br>-16.8 dB @ 60 Hz<br>Voltage input:<br>-3 dB @ 17 Hz; -20 dB/decade<br>-10 dB @ 50 Hz<br>-11.4 dB @ 60 Hz |
| Accuracy(1) | Current input: 0.20% Full Scale @ 25 °C<br>Voltage input: 0.20% Full Scale @ 25 °C<br>Current output: 0.425% Full Scale @ 25 °C<br>Voltage output: 0.133% Full Scale @ 25 °C |
| Accuracy drift with temperature | Current input: 0.0407% Full Scale @ 25 °C<br>Voltage input: 0.0428% Full Scale @ 25 °C<br>Current output: 0.0069% Full Scale @ 25 °C<br>Voltage output: 0.0045% Full Scale @ 25 °C |
| Input impedance | Current input: 238 Ω<br>Voltage input: 100 kΩ |
| Voltage input, overload, max | 30V, single channel, continuous |
| Output resolution | 12 bits + sign<br>5.13 μA/cnt<br>2.56 mV/cnt |
| Output conversion type | Pulse width modulation |
| Output conversion rate | 1.024 ms all channels |
| Current load on voltage output, max | 3 mA |
| Resistive load on current output | 15…750 Ω |

**4 Input / 2 Output Analog Combination Modules**

| Specification | 1794-IE4XOE2, 1794-IE4XOE2XT |
|---|---|
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Temperature, operating | **1794-IE4XOE2:** 0…55 °C (32…131 °F)<br>**1794-IE4XOE2XT:** -20…70 °C (-4…185 °F) |

(1) Includes offset, gain, non-linearity and repeatability error terms.

## 1794-IF2XOF2I and 1794-IF2XOF2IXT 2 Input/2 Output Isolated Analog Combination Module

The 1794-IF2XOF2I is a combination module with 2 inputs and 2 outputs with isolated, individually-configurable channels. Inputs accept signals from a variety of input sensors (2-, 3-, and 4-wire) in the range of ±10V or ±20 mA. Outputs produce signals in the range of ±10V or 0...20 mA.

The 1794-IF2XOF2IXT is the extended temperature version of the 1794-IF2XOF2I module.

**ATTENTION:** Only connect either a voltage input or a current input per channel, not both.

**2 Input/2 Output Isolated Combination Module**

| Specification | 1794-IF2XOF2I, 1794-IF2XOF2IXT |
|---|---|
| Calibration | Factory calibration(2) |
| Input conversion type | Sigma Delta |
| Input conversion rate | 2.5/5.0/7.5 ms all channels |
| Input resolution | 16 bit – unipolar<br>15 bit + sign – bipolar<br>0.156 mV/cnt – unipolar<br>0.313 mV/cnt – bipolar<br>0.320 µA/cnt – unipolar<br>0.640 µA/cnt – bipolar |
| Isolation voltage | 120V continuous (when used with 1794-TB3, 1794-TB3S, 1794-TB2, 1794-TB3T, or 1794-TB3TS)<br>250V continuous (when used with 1794-TBN)<br>Tested at 1500V AC for 60 s and 2550V DC for 1 s, channel to channel, I/O to system |
| Data format | 16 bits, 2's complement<br>2's complement percent<br>binary<br>offset binary |
| Step response to 63% of FS, input | Current or voltage input:<br>1200 Hz conversion rate = 0.6 ms<br>600 Hz conversion rate = 6.7 ms<br>300 Hz conversion rate = 13.4 ms<br>150 Hz conversion rate = 26.7 ms |

### 2 Input/2 Output Isolated Combination Module

| Specification | 1794-IF2XOF2I, 1794-IF2XOF2IXT |
|---|---|
| Normal mode rejection ratio | -3 dB @ 12 Hz (300 Hz conversion rate)<br>-80.0 dB @ 50 Hz (300 Hz conversion rate)<br>-3 dB at 6 Hz (150 Hz conversion rate)<br>-80 dB at 60 Hz (150 Hz conversion rate) |
| Accuracy(1) | Current input or output: 0.1% Full Scale @ 25 °C<br>Voltage input or output: 0.1% Full Scale @ 25 °C |
| Accuracy drift with temperature | Current input: 0.0038% Full Scale/°C<br>Voltage input: 0.0028% Full Scale /°C<br>Current output: 0.0025% Full Scale /°C<br>Voltage output: 0.0012% Full Scale /°C |
| Input impedance | Current input: <100 Ω<br>Voltage input: >1 MΩ(3) |
| Voltage input, overload, max | 30V, single channel, continuous |
| Output resolution | 15 bit + sign<br>0.656 μA/cnt<br>0.320 mV/cnt |
| Output conversion type | Digital-to-analog converter |
| Output conversion rate | 2.5/5.0 ms |
| Current load on voltage output, max | 3 mA |
| Resistive load on current output | 0…750 Ω |
| Dimensions (HxWxD), approx | **1794-IF2XOF2I:**<br>46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed<br>**1794-IF2XOF2IXT:**<br>46 x 94 x 75 mm (1.8 x 3.7 x 2.9 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |
| Temperature, operating | **1794-IF2XOF2I:** 0…55 °C (32…131 °F)<br>**1794-IF2XOF2IXT:** -20…70 °C (-4…185 °F) |

(1) Includes offset, gain, non-linearity and repeatability error terms.

(2) Can be calibrated in field when necessary.

(3) If 24V DC is removed from the module, input resistance = 10 KΩ.

## FLEX I/O Analog Output Modules

### Analog Output Comparison

| Catalog Number | Output Signal Range | External DC Supply Current, Nom | Power Dissipation, Max | Thermal Dissipation, Max |
|---|---|---|---|---|
| 1794-OE4(1) | 4…20 mA<br>0…20 mA<br>±10V<br>0…10V | 70 mA @ 24V DC(2) | 4.5 W @ 31.2V DC | 15.3 BTU/hr @ 31.2V DC |
| 1794-OE4XT | | 180 mA @ 10.5V DC | | 13.6 BTU/hr @ 31.2V DC |
| 1794-OE8H | 4…20 mA (user configurable)<br>0…20 mA (user configurable) | 255 mA @ 24V DC | 6.1 W | 20.8 BTU/hr |
| 1794-OE12 | 0 mA output until module is configured<br>4…20 mA (user configurable)<br>0…20 mA (user configurable) | 320 mA @ 24V DC;<br>720 mA @ 10.0V DC | 40 W @ 31.2V DC;<br>4.3 W @ 24V DC;<br>10.0 W @ 10.0V DC | 14.7 BTU/hr @ 24V DC |

**Analog Output Comparison**

| Catalog Number | Output Signal Range | External DC Supply Current, Nom | Power Dissipation, Max | Thermal Dissipation, Max |
|---|---|---|---|---|
| 1794-OF4I | 4…20 mA<br>0…20 mA<br>±10V<br>0…10V<br>±5V<br>0…5V | 210 mA @ 24V DC | 4.7 W @ 31.2V DC | 16 BTU/hr @ 31.2V DC |
| 1794-OF8IH | 4…20 mA (user configurable)<br>0…20 mA (user configurable) | 450 mA @ 24V DC | 5.0 W @ 31.2V DC | 6.8 BTU/hr @ 31.2V DC |
| 1794-IE8XOE4(1) | 4…20 mA<br>0…20 mA<br>±10V<br>0…10V | 140 mA @ 24V DC;<br>280 mA @ 10.0V DC | 3.0 W @ 31.2V DC;<br>2.3 W @ 24V DC;<br>2.0 W @ 10.0V DC | 10.3 BTU/hr @ 31.2V DC |
| 1794-IE4XOE2(1) | 4…20 mA<br>0…20 mA<br>±10V<br>0…10V | 70 mA @ 24V DC | 4.0 W @ 31.2V DC | 13.6 BTU/hr @ 31.2V DC |
| 1794-IF2XOF2I(1) | 4…20 mA<br>0…20 mA<br>±10V<br>0…10V<br>±5V<br>0…5V | 150 mA @ 24V DC | 3.3 W @ 31.2V DC | 11 BTU/hr @ 31.2V DC |

(1) Each module's channel is individually selectable or as a group of four.

(2) Not including outputs.

## 1794-OE4 and 1794-OE4XT Analog 4 Output Module

The 1794-OE4 module has 4 output, non-isolated, individually-configurable channels. Outputs are capable of driving the field devices that require a voltage of ±10V or a current of 0... 20 mA.

**Analog 4 Input Modules**

| Specification | 1794-OE4 | 1794-OE4XT |
|---|---|---|
| Output resolution | 12 bit + sign<br>2.56 mV/cnt<br>5.13 μA/cnt | 12 bits + sign<br>0.156 mV/cnt<br>0.320 μA/cnt |
| Data format | 16 bits, 2's complement, left-justified | |
| Output conversion type | Pulse width modulation | |
| Output conversion rate | 1.024 ms all channels | Outputs: PWM |
| Step response to 63% of FS, output | Voltage output: 24 ms | |
| Current load on voltage output, max | 3 mA | |
| Output current, resistive load | 15…750 Ω | |
| Accuracy | Current input:<br>0.425% Full Scale @ 25 °C (77 °F)<br>Voltage input:<br>0.133% Full Scale @ 25 °C (77 °F)(1) | |

**Analog 4 Input Modules**

| Specification | 1794-OE4 | 1794-OE4XT |
|---|---|---|
| Accuracy drift w/temp | Current input: 0.0069% Full Scale /°C<br>Voltage input: 0.0045% Full Scale/°C | |
| Calibration | None required | |
| Isolation voltage | 50 (continuous), I/O to system<br>Type tested at 850V DC for 1 s, I/O to system<br>Type tested at 850V DC for 60 s (for 1794-OE4XT only)<br>No isolation between individual channels | |
| Power dissipation, max | 4.5 W @ 31.2V DC | |
| Thermal dissipation, max | 15.3 BTU/hr @ 31.2V DC | 13.6 BTU/hr @ 31.2V DC |
| Wire size | 0.34... 2.5 $mm^2$ (22...12 AWG) solid or stranded shielded copper wire rated at 75 °C (167 °F) or greater 1.2 mm (3/64 in.) insulation max | |
| Wire category | 2 – on signal ports<br>2 – on power ports(2) | 2 - on signal ports |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 3.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed | |
| Temperature, operating | 0…55 °C (32…131 °F) | -20…70 °C (-4…185 °F) |

(1) Includes offset, gain, non-linearity, and repeatability error terms

(2) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1.

## 1794-OE8H HART Enabled Analog 8 Output Module

The 1794-OE8H is a HART enabled analog output module that works with HART enabled field devices that use current in the 0 to 20 mA range. Use with 2 wire devices. This module provides wire-off detection on a per-channel basis.

This module can be used on ControlNet, EtherNet/IP or PROFIBUS DP networks. One HART field device per channel.

**HART Enabled Analog 8 Output Module**

| Specification | 1794-OE8H |
|---|---|
| Output resolution | 13 bit |
| Data format | Configurable |
| Output conversion type | — |
| Output conversion rate | 10 ms for all channels |
| Step response to 99% of FS, output | 13 ms to 99% of FS<br>115 ms during HART communication |
| Current load on voltage output, max | 0…22 mA @ > 15V |
| Output current, resistive load | 0…680 Ω @ 22 mA<br>0…770 Ω @ 20 mA |
| Accuracy | 0.1% Full Scale @ 20 °C (68 °F) |
| Accuracy drift with temperature | 0.010% Full Scale @ 20 °C (68 °F) |

**HART Enabled Analog 8 Output Module**

| Specification | 1794-OE8H |
|---|---|
| Calibration | — |
| Isolation voltage | 50V (continuous), Basic Insulation Type<br>No isolation between individual channels |
| Power dissipation, max | 6.1 W |
| Thermal dissipation, max | 20.8 BTU/hr |
| Wire size | 0.34... 2.5 $mm^2$ (22...12 AWG) solid or stranded shielded copper wire rated at 75 °C (167 °F) or greater 1.2 mm (3/64 in.) insulation max |
| Wire category | 2 – on signal ports<br>2 – on power ports(1) |
| Dimensions (HxWxD), approx | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1.

## 1794-OE12 Analog 12 Output Module

1794-OE12 module is a High Density analog output module, capable of providing current in the range of 0...20mA or voltage in the range of ±10V, depending on the user configuration. Out of Range status bit exists for each channel.

**Analog 12 Output Module**

| Specification | 1794-OE12 |
|---|---|
| Output resolution | 320 µV/cnt<br>0.641 µA/cnt |
| Data format | Configurable |
| Output conversion type | Digital to analog converter |
| Output conversion rate | Outputs: DAC |
| Step response to 63% of FS, output | ~70% 1st convert<br>96% 2nd convert<br>100% 3rd convert |
| Current load on voltage output, max | 3 mA |
| Output current, resistive load | 0…750 Ω over full power supply range |
| Accuracy | Current Output: 0.1% Full Scale at 25 °C<br>Voltage Output: 0.1% Full Scale at 25 °C |
| Accuracy drift w/temp | Current Output: 0.004% Full Scale/°C<br>Voltage Output: 0.004% Full Scale/°C |
| Calibration | None required |
| Isolation voltage | 50V (continuous), Basic Insulation Type<br>Type tested at 850V DC for 60 s, between field side and system<br>No isolation between individual channels |

**Analog 12 Output Module**

| Specification | 1794-OE12 |
|---|---|
| Power dissipation, max | 4.0 W @ 31.2V DC<br>4.3 W @ 24V DC<br>4.0 W @ 10.0V DC |
| Thermal dissipation, max | 14.7 BTU/hr @ 24V DC |
| Wire size | 0.34... 2.5 $mm^2$ (22...12 AWG) solid or stranded shielded copper wire rated at 75 °C (167 °F) or greater 1.2 mm (3/64 in.) insulation max |
| Wire category | 2 – on signal ports<br>2 – on power ports(1) |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 3.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1.

## 1794-OF4I and 1794-OF4IXT Isolated Analog 4 Output Module

The 1794-OF4I modules provides 4 isolated outputs for 2-, 3-, and 4-wire output devices that use voltage in the range of ±10V or 0...20 mA current.

1794-OF4IXT is the extended temperature version of the 1794-OF4I module.

**Isolated Analog 4 Output Module**

| Specification | 1794-OF4I, 1794-OF4IXT |
|---|---|
| Output resolution | 15 bit + sign<br>0.656 µA/cnt<br>0.320 mV/cnt |
| Data format | 2's complement<br>2's complement percent<br>binary<br>offset binary |
| Output conversion type | Digital to analog converter |
| Output conversion rate | 2.5/5.0 ms |
| Step response to 63% of FS, output | Current or voltage output: <25 µs |
| Current load on voltage output, max | 3 mA |
| Output current, resistive load | 0…750 Ω |
| Accuracy | Current input: 0.1% Full Scale @ 25 °C (77 °F)<br>Voltage input: 0.1% Full Scale @ 25 °C (77 °F)(1) |
| Accuracy drift w/temp | Current input: 0.0025% Full Scale /°C<br>Voltage input: 0.0012% Full Scale/°C |
| Calibration | Factory calibrated |
| Isolation voltage | 120V (continuous), when used with 1794-TB2, 1794-TB3, 1794-TB3S, 1794-TB3T, or 1794-TB3TS<br><br>250V (continuous), when used with 1794-TBN<br>Type tested at 1500V AC for 60 s, and 2550V DC for 1 s, channel to channel, I/O to system |

### Isolated Analog 4 Output Module

| Specification | 1794-OF4I, 1794-OF4IXT |
|---|---|
| Power dissipation, max | 4.7 W @ 31.2V DC |
| Thermal dissipation, max | 16 BTU/hr @ 31.2V DC |
| Wire size | 0.34... 2.5 $mm^2$ (22...12 AWG) solid or stranded shielded copper wire rated at 75 °C (167 °F) or greater 1.2 mm (3/64 in.) insulation max |
| Wire category | 2 – on signal ports<br>3 – on power ports(2) |
| Dimensions (HxWxD), approx | **1794-OF4I:**<br>46 x 94 x 53 mm (1.8 x 3.7 x 3.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed<br>**1794-OF4IXT:**<br>46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |
| Temperature, operating | **1794-OF4I:** 0…55 °C (32…131 °F)<br>**1794-OF4IXT:** -20…70 °C (-4…185 °F) |

(1) Includes offset, gain, non-linearity, and repeatability error terms

(2) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1.

## 1794-OF8IH HART Isolated Analog 8 Output Module

The 1794-OF8IH modules provides 8 HART enabled isolated outputs for 2-, 3-, and 4-wire output devices that use voltage in the range of ±10V or 0...20 mA current.

### HART Enabled Isolated Analog 8 Output Module

| Specification | 1794-OF8IH |
|---|---|
| Output resolution | 16 bits – unipolar<br>0.305 µA/cnt unipolar |
| Data format | Engineering units<br>Percent of Full Scale<br>RAW/proportional count |
| Output conversion type | 16 Bit Digital to Analog Converter |
| Output conversion rate | 10 ms |
| Step response to 63% of FS, output | < 70 ms |
| Output current, resistive load | 0…750 Ω |
| Accuracy | ± 0.1% Full Scale at 25 °C<br>± 0.35% Full Scale at 0…55 °C |
| Accuracy drift w/temp | ± 0.008% /ºC<br>0.0038 Full Scale /°C |
| Calibration | Factory calibrated |
| Isolation voltage | 120V (continuous), Basic Insulation Type<br>Type tested at 1000V AC for 60 s, between user power to system, channel to system, and channel to channel |
| Power dissipation, max | 5.0 W @ 31.2V DC |

### HART Enabled Isolated Analog 8 Output Module

| Specification | 1794-OF8IH |
|---|---|
| Thermal dissipation, max | 16 BTU/hr @ 31.2V DC |
| Wire size | 0.34... 2.5 $mm^2$ (22...12 AWG) solid or stranded shielded copper wire rated at 75 °C (167 °F) or greater 1.2 mm (3/64 in.) insulation max |
| Wire category | 2 – on signal ports<br>3 – on power ports(1) |
| Dimensions (HxWxD), approx | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1.

## FLEX I/O Counter Modules

In order to decide which FLEX I/O counter module would best suit your application needs, you should identify the following:

- What type of application the module will be used for
- What field devices, signal levels, and signal type are being connected to the counter module

**Counter Module Comparison**

| Catalog Number | Application | Network Capability | Number of Inputs/ Outputs | External DC Supply Current, Nom | Power Dissipation, Max | Thermal Dissipation, Max |
|---|---|---|---|---|---|---|
| 1794-IJ2<br>1794-IJ2XT | Rational control, including:<br>• turbine generators<br>• motors<br>• drives<br>• gears<br>• shaft | All networks supported by FLEX I/O | 2 Input<br>2 Output | 220 mA @ 19.2V DC<br>180 mA @ 24V DC<br>140 mA @ 31.2V DC | 4.5 W @ 31.2V DC | 15.3 BTU/hr @ 31.2V DC |
| 1794-VHSC | Applications including:<br>• packaging<br>• material handling<br>• flow monitoring<br>• cut-to-length<br>• motor speed control<br>• monitoring | ControlNet:<br>• 1794-ACN15<br>• 1794-ACNR15<br>EtherNet/IP:<br>• 1794-AENT<br>• 1794-AENTR | 2 Input<br>2 Output | 100 mA @ 24V DC(1) | 5W @ 31.2V DC | 17.1 BTU/hr @ 31.2V DC |
| 1794-ID2 | Applications including:<br>• quality counting<br>• positioning<br>• speed calculations | All networks supported by FLEX I/O | 2 Input | 150 mA @ 12V DC<br>75 mA @ 24V DC | 5.0 W @ 26.4V DC | 17.1 BTU/hr @ 26.4V DC |
| 1794-IP4 | Applications including:<br>• counting pulse from flow meters<br>• counting pulse from density meters<br>• quality counting<br>• speed calculations | | 4 Input | | | |

(1) Does not represent power required to supply the inputs or outputs

## 1794-IJ2 and 1794-IJ2XT 24V DC Input Frequency Module

The 1794-IJ2 is essentially a tachometer with the capability of reporting frequency, acceleration, and direction. Outputs are activated by alarms. Input devices range from magnetic pickup to flowmeters, to incremental encoders to proximity detectors. This intelligent I/O module is designed to perform high-speed frequency algorithms. The module provides 2 frequency inputs, 2 gate inputs, and 2 outputs. The frequency inputs are capable of accepting frequencies up to 32KHz. The module accepts and returns binary data.

The 1794-IJ2 measures frequency over a user-specified time interval. A frequency calculation can start before the time interval has elapsed, if a user-specified number of frequency input pulses have occurred.

The module's primary target is high-speed, accurate frequency measurement. As such, a high-speed internal clock is synchronized with the frequency input to count over a user-selected sampling time or a user-defined number of frequency input pulses.

Power to the module is supplied from the external power supply. All power for input devices (24V DC) is supplied by the I/O module. Outputs are used to set alarms depending on the input conditions.

The 1794-IJ2 module accepts the following frequency inputs:

- 24V DC IEC1+ proximity switch as defined by standard IEC 1131-2
- 24V DC contact switch with wire off capability
- 500 mV AC magnetic pickup
- 50 mV AC magnetic pickup
- 6V AC vortex
- 3V AC vortex

The 1794-IJ2 module accepts the following gate inputs:

- 24V DC IEC1+ proximity switch as defined by standard IEC 1131-2
- 24V DC contact switch
- 500 mV AC magnetic pickup
- 50 mV AC magnetic pickup

Customer supplied power, ranging from 10...31.2V DC, is connected internally to the power output transistor. When an output is turned on, current flows into the source out of the drain, through the load connected to the ground of the customer supply (customer return). Diode D6 protects the power output transistors from damage due to inductive loads. Output Q1 is a thermally protected FET and will turn off at 3 A (approximately). After an output goes into thermal shutdown, you must fix the cause of the shutdown and toggle the outputs ON and OFF to reenergize the output. RT1 protects D6 and Q1 if power supply polarity is reversed.

The frequency input module isolated power supply consists of 1 isolated 24V DC power supply that provides 2 current limited outputs of 30 mA maximum (1 for each channel).

**24V DC Input Frequency Module**

| Specification | 1794-IJ2, 1794-IJ2XT |
|---|---|
| Processing time | ≤ 4 ms |
| Input frequency, max | 1…32 kHz w/sine wave<br>1…32 kHz w/square wave input |
| Frequency value, max | 32,767 or 3,276.7 (dependent on range) |
| Input pulse width, min | 20 μs |
| Voltage, on-state input, min | 10V (24V IEC+1 proximity, encoder input or switch inputs) |
| Voltage, on-state input, nom | 24V DC |
| Voltage, on-state input, max | Limited to isolated 24V DC power supply |
| Current, on-state input, min | 2.0 mA |
| Current, on-state input, nom | 9.0 mA |
| Current, on-state input, max | 10.0 mA |
| Voltage, off-state input, max | 5.0V DC on 24V DC IECI + terminal |
| Current, off-state input, max | 1.5 mA into 24V DC IECI + terminal |
| Wire-off detection | 0.4 mA for proximity, encoder, or contact switch with 50 kW shunt resistor |
| Impedance, frequency input | >5 kΩ for 50 mV extended magnetic pickup<br>>5 kΩ for 500 mV magnetic pickup<br>>10 kΩ for 3V vortex flowmeter<br>>10 kΩ for 6V vortex flowmeter<br>>2.5 kΩ for 24V DC IEC1+ proximity or encoder input<br>>2.5 kΩ for 24V DC contact switch input |
| Impedance, gate input | >5 kΩ for 50 mV extended magnetic pickup<br>>5 kΩ for 500 mV magnetic pickup<br>>2.5 kΩ for 24V DC IEC1+ proximity or encoder input<br>>2.5 kΩ for 24V DC contact switch input |
| Output voltage source | Customer supplied |
| Voltage, on-state output, min | 10V DC |
| Voltage, on-state output, nom | 24V DC |
| Voltage, on-state output, max | 31.2V DC |
| Current, on-state output, min | 1.0 mA per output |
| Current, on-state output, max | 1.0 A per channel sourced out of module(1) |
| Output surge current, max | 2 A for 50 ms, repeatable every 2 s |
| Voltage drop, on-state output, max | 0.9V dc @ 1 A |
| Output control | Outputs individually assignable to:<br>Frequency<br>% Full Scale<br>Acceleration alarm |
| Output switching time | Triggered by frequency alarm or acceleration alarm<br>Turn On: < 0.5 ms<br>Turn Off: < 1 ms |

**24V DC Input Frequency Module**

| Specification | 1794-IJ2, 1794-IJ2XT |
|---|---|
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 3.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |
| Temperature, operating | **1794-IJ2:** 0…55 °C (32…131 °F)<br>**1794-IJ2XT:** -20…70 °C (-4…185 °F) |

(1) Current Limited: All outputs can be on simultaneously without derating.

## 1794-VHSC 2 Channel Very High Speed Counter Module

A counter module has two incremental quadrature encoder interfaces each with three inputs (A, B, and Z). Each input module has ± inputs for connection to pulse transmitters with complementary or non-complementary signals.

The counter can count pulses of one or two pulse trains for up/down counting and detection of a selectable number of edges (X1, X2, X4). Each of the two counters has an upper limit of 1MHz, a 24-bit counter register, a preset register, and a latch register.

Power to the module is supplied from an external 24V power supply. The 1794-VHSC has two outputs that can be configured for overlapping, multiple windows, and/or pulse width modulation.

**2 Channel Very High Speed Counter Module**

| Specification | 1794-VHSC |
|---|---|
| Input groups | 2 groups of A/A, B/B, and Z/Z pairs with 5V DC or<br>15…24V DC terminations |
| Input frequency, max | 1.0 MHz counter and encoder X1 (no filters)<br>500 kHz encoder X2 (no filters)<br>250 kHz encoder X4 (no filters) |
| Voltage, on-state input, min | 5V DC terminations: >2.6V DC<br>15…24V DC terminations: >12.5V DC |
| Voltage, on-state input, max | 5V DC terminations: ±6V<br>15…24V DC terminations: Refer to derating curve |
| Voltage, off-state input, min | 5V DC terminations: ≤ 1.25V DC<br>15…24V DC terminations: ≤ 1.8V DC |
| Current, on-state input, min | >5 mA |
| Current, on-state input, max | ≤ 0.250 mA |
| Input filter selections | 5: Off, 10 µs, 100 µs, 1.0 ms, 10.0 ms per A/B/Z group |
| Output control | Outputs can be tied to 8 compare windows |
| Output supply voltage range | 5…7V DC or 10…31V DC |
| Leakage current, off-state output, max | ≤ 0.3 mA |
| Voltage drop, on-state output, max | 5V operation – 0.5 A<br>12…24V operation – 1.0 A |

### 2 Channel Very High Speed Counter Module

| Specification | 1794-VHSC |
|---|---|
| Current, on-state output, max | 5V operation – 0.5 A<br>12…24V operation – 1.0 A |
| Current per output pair, max | 5V operation – 0.9 A<br>12…24V operation – 4.0 A |
| Short circuit current | 5V operation – 0.9V DC @ 0.5 A(1)<br>12…24V operation – 0.9V DC @ 1.0 A |
| Output delay time, OFF to ON | 25 μs (load dependent) |
| Output delay time, ON to OFF | 150 μs (load dependent) |
| Dimensions (HxWxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 3.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |

(1) Outputs are short circuit protected and turned off until power is cycled.

### 1794-VHSC Derating Curve

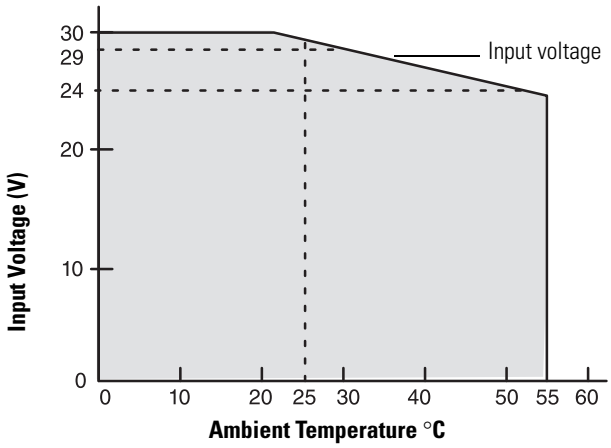


The area within the curve represents the safe operating range for the module under various conditions of user supplied 24V DC supply voltages and ambient temperatures. This includes all possible mounting positions, including inverted horizontal.

= Safe operating area

## 1794-ID2 2 Input Pulse Counter Module

The 1794-ID2 module is a 2-channel counter used in applications where pulse counting is required. Typical input devices include quadrature incremental encoders with or without reference and/or gate function and pulse transmitters. You can use one or two pulse trains.

### 2 Input Pulse Counter Module

| Specification | 1794-ID2 |
|---|---|
| Input pulse width | Each signal condition must be stable for at least 2 ms to be recognized |
| Input groups | 2 groups of A, B, Z, G inputs |
| Counting frequency, max | 100 kHz |
| Cable type | Input: Belden 8761 |
| Wire category | 2(1) |
| Conductor length, max | 304.8 m (1000 ft) |
| Input signal range | 3 mA @ 6V DC<br>9 mA @ 12V DC<br>15 mA @ 24V DC |
| Dimensions (WxHxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 3.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |

(1) Use this Conductor Category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1.

## 1794-IP4 4 Input Pulse Counter Module

The pulse counter modules perform high-speed scaling, calculation operations for various industrial applications. Some sample applications include:

- quantity counting
- speed calculation
- flow monitoring

All the input devices for the pulse counter module should be able to provide the input signal of 6V amplitude. The 1794-IP4 has a 6V minimum threshold for an input ON condition and a maximum 3V threshold for an input OFF condition. The region between 3V and 6V is a transitional one and therefore requires input signals to pass cleanly through that region.

**4 Input Pulse Counter Module**

| Specification | 1794-IP4 |
|---|---|
| Counting frequency, max | 100 kHz(1) |
| Input frequency, max | 100 |
| Input signal range | 3 mA @ 6V DC<br>9 mA @ 12V DC<br>15 mA @ 24V DC |
| Overflow | Maximum period – 65 ms when 1 MHz internal clock selected<br>Maximum period – 6.5 ms when 10 MHz internal clock selected |
| Dimensions (WxHxD), approx | 46 x 94 x 53 mm (1.8 x 3.7 x 3.1 in.)<br>94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in.) installed |

(1) Each signal condition must be stable for at least 2 ms to be recognized.

## Notes:

# Select a FLEX I/O Terminal Base Unit

## Step 3 – Select:

*the appropriate terminal base unit for your module and system*

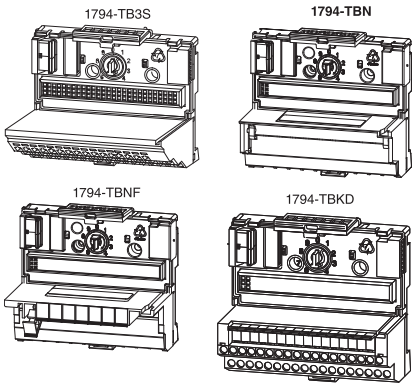


Each FLEX I/O module requires a terminal base unit that snaps onto the DIN rail to the right of the I/O adapter. The terminal bases provide terminal connection points for the I/O wiring and plug together to form the backplane. They are available with screw, clamp, or spring terminations.

**Common Terminal Base Characteristics**

| Current Capacity, max | Wire Size | Dimensions (HxWxD) |
|---|---|---|
| 10 | 0.34…2.1 $mm^2$ (22…14 AWG) solid or stranded copper wire rated at 75 °C (167 °F) or greater, 1.2 mm (3/64 in.) insulation max | 94 x 94 x 69 mm<br>3.7 x 3.7 x 2.7 in.<br>**1794-TB37DS and 1794-TB62DS*** (1)<br>127 x 94 x 69 mm<br>5.0 x 3.7 x 2.7 in |

(1) Measured with expansion module installed.

The following table is a comparison of general specifications for each FLEX I/O terminal base unit. For compatibility with FLEX I/O modules, see Table Digital I/O Module Summary on page 16.

**General Specification Comparison**

| Catalog(1) | Termination Type | Connections | Used in Applications | Current Capacity, max | Wiring Category | Purpose |
|---|---|---|---|---|---|---|
| 1794-TB2 | Cage clamp | 16 I/O; 18 common; 2 +V | Up to 132V AC/156V DC | 10 | 2 | A generic 2-wire version of the 1794-TB3. |
| 1794-TB3, 1794-TB3K(2) | | 16 I/O; 18 common; 18 +V | | | Module dependent | Primarily intended for use with input modules when using 3-wire input proximity switches – can also be used with output modules. |
| 1794-TB3S, 1794-TB3SK | Spring clamp | | | | | A spring clamp version of the 1794-TB3 – provides faster, simpler wire installation. |
| 1794-TB32 | Cage clamp | 32 I/O; 8 common; 8 +V | Up to 31.2V DC | | | A 32-point version of the 1794-TB3 to be used with 32-point digital modules and the 1794-IB16D module. |
| 1794-TB32S | Spring clamp | | | | | A spring clamp version of the 1794-TB32. |
| 1794-TB3G, 1794-TB3GK(2) | Grounded screw clamp | 36 I/O; 2 common; 2 +V; 10 chassis ground | | | | A screw clamp terminal base unit with individual grounding used with certain analog modules. |
| 1794-TB3GS, 1794-TB3GSK(2) | Grounded spring clamp | | | | 2 | A spring clamp version of the 1794-TB3G. |

### General Specification Comparison

| Catalog[1] | Termination Type | Connections | Used in Applications | Current Capacity, max | Wiring Category | Purpose |
|---|---|---|---|---|---|---|
| 1794-TB3T | Cage clamp, temperature | 16 I/O; 10 common; 4 +V; 8 chassis ground; 2 sets of CJC for temperature modules | Up to 132V AC/156V DC | 10 | Module dependent | A cage clamp terminal base to be used with the 1794-IT8 or 1794-IRT8 module (when used in thermocouple mode) – also provides chassis ground connections for the 1794-IR8 and analog modules. |
| 1794-TB3TS, 1794-TB3TSK[2] | Spring clamp, temperature | 16 I/O; 10 common; 4 +V; 8 chassis ground; 2 sets of CJC for temperature modules | Up to 132V AC/156V DC | 10 | 2 | A spring clamp version of the 1794-TB3T. |
| 1794-TBKD | Cage clamp, knife disconnect | 16 I/O; 18 common; 2 +V | — | | Module dependent | A cage clamp terminal base with 16 knife disconnects. |
| 1794-TBKDS | | | | | | A spring clamp version of the 1794-TBKD. |
| 1794-TBN, 1794-TBNK[2] | Screw clamp, NEMA-style | 16 I/O; 2 common; 2 +V | 264V AC/DC | | | A NEMA-style screw clamp terminal base for larger gauge wires with a cover for I/O wiring. |
| 1794-TBNF | Screw clamp, fused NEMA-style | | | | | Provides eight 5 x 20 mm fused, screw terminals with a cover for I/O wiring – shipped with fuses for the 1794-OA8 module; can be used to fuse the 1794-OM8 and 1794-OW8 modules with a replacement fuse.[3] |
| 1794-TB37DS | D-shell | 37 Pin; digital and analog | — | | Module dependent | A 37-pin D-shell termination for both digital and analog modules. |
| 1794-TB62DS | | 62 Point; | | | | A 62-pin D-shell termination for both digital and analog modules. |
| 1794-TB62DSG | Grounded D-shell | 62 Point; chassis ground | | | | A grounded version of the 1794-TB62DS – for use with analog modules. |
| 1794-TB62DST | D-shell | 16 I/O; 18 common; 2 +V; 2 sets of CJC for temperature modules | | | | A 62-pin D-shell termination to be used with the 1794-IT8 or 1794-IRT8 module (when used in thermocouple mode) – also provides chassis ground connections for analog modules. |

(1) Isolation voltage, channel to channel, is determined by the insert module. Use this conductor category information for planning conductor routing. Refer to Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1.

(2) The letter K in the last position of the catalog number, before the series designation, indicates a conformal coated versions of standard modules and can be used with extended temperature modules (modules ending in -XT).

(3) Contains eight 5 x 20 mm fuses (one for each even-numbered terminal – 0…14 on row B). Shipped with 1.6 A, 250V AC Slow Blow fuse suitable for the 1794-OA8 AC output module. Refer to individual installation instructions for fusing recommendations for other modules. Littlefuse PN23901.6 A-B PN94171304, SAN-O PNSD6-1.6A.

# Select a FLEX I/O Power Supply

## Step 4 – Select:

*if power consumption exceeds the maximum for a single power supply, install additional power supplies*

FLEX I/O modules are interfaced to the I/O link through a FLEX I/O adapter module with a built-in 24V DC input power supply. The FLEX I/O modules receive power from the adapter/power supply through the backplane. The 120V AC to 24V DC power supply (1794-PS13 or 1794-PS3) is also available for powering the adapter/power supply.

**General Specification Comparison**

| Catalog | Power Supply Input Voltage, nom | Power Supply Input Power | Apparent Input Power, max | Transformer Load, max | Output Current, max | Output Voltage, nom | Dimensions (HxWxD), approx |
|---|---|---|---|---|---|---|---|
| 1794-PS3 | 120V/220V AC | 86 W | 205 VA | 250 VA | 3.0 A | 24V DC | 87 x 94 x 69 mm (3.4 x 3.7 x 2.7 in.) |
| 1794-PS13 | | 36 W | 53 VA | 90 VA | 1.3 A | | 87 x 69 x 69 mm (3.4 x 2.7 x 2.7 in.) |

## Power Supply Definitions

**Module Supply Voltage** — This is typically either 120V AC or 24V DC nominal voltage that is supplied from an external power source wired to the module terminal base unit.

All Flex I/O adapters provide internal power to the maximum possible number of 8 Flex I/O modules. Power supply modules are required to provide 24V to the adapters.

The 1794-PS13 power supply is capable of supplying a maximum of 1.3 A at 24V DC. The output surge current is sufficient to drive four adapters with a surge of 23 A for 2 ms each operating at 24V DC.

The 1794-PS3 power supply is capable of supplying a maximum of 3 A(1) at 24V DC. The output surge current is sufficient to drive six adapters with a surge of 23 A for 2 ms each operating at 24V DC.

Non-Allen-Bradley DC power supplies can also be used, but should operate within the specifications for the devices they are powering. Size the power supply by calculating the total current consumed by summing the currents for each of the modules used for the power supply operating voltage applied.

(1) This refers to horizontal mounting: 2.8 A maximum for all other mountings. Refer to the derating curve in the installation instructions for that module.

The 1606 switched mode power supplies are capable of supplying a maximum of up to 40 A at 24V DC and can be used as an alternative when more power is needed.

**Digital Input Modules** require supplied 24V DC (19.2...31.2V DC) and consume the currents listed in the module specifications.

Digital Output Modules require supplied 24V DC (19.2...31.2V DC) and consume the currents listed in the module specifications plus the total current consumed by their loads. The load current is limited by the maximum load current and surge listed.

**Combination Digital Modules** have a combination of inputs and outputs. The current load should be determined as described for the combined input and output specifications listed.

**Analog Input Modules** require supplied 24V DC (19.2...31.2V DC) and consume the currents listed in the module specifications. In addition, adequate power must be supplied to the 1794-IE8 and 1794-IF4I transmitters to deliver input terminal voltage or drive 20 mA into the input impedance listed. This power source may be the same as the module power and can be included in the power supply calculated.

**Analog Output Modules** require supplied 24V DC (19.2...31.2V DC) and consume the currents listed plus the total current consumed by their loads. The load current is limited by maximum current or resistive load permitted per channel.

**Combination Analog Modules** have a combination of analog inputs and outputs. The current load should be determined as described previously for the combined modules and output specifications listed. The output load current is limited by the maximum current or resistive load permitted per channel. In addition, adequate power must be supplied to the 1794-IE8 and 1794-IF4I transmitters to deliver input terminal voltage or drive 20 mA into the input impedance listed. This power source may be the same as the module power and can be included in the power supply calculation.

**Counter Modules** require module power, transmitter input power, and in some cases output load power. If output load power is required, use a separate power supply for output load power for noise immunity.

## Power Requirements and Transformer Sizing

- Use the real power value in watts for determining the amount of heat dissipation you will have inside the enclosure.
- Use the apparent power value in VA for estimated power distribution sizing.
- Use the transformer load value in VA of each power supply plus all other loads on a transformer to determine the required transformer size.

### 1794-PS3 AC/DC

output current load




real power (Watts




apparent power (Watts)




transformer load (VS)

### 1794-PS13 AC/DC

output current load (Amps)




real power (Watts




apparent power (Watts)




transformer load (VS)
= real power (Watts) X 25

## Notes:

# About the FLEX Ex I/O Systems

## 1797 FLEX Ex I/O Overview

FLEX Ex I/O offer:

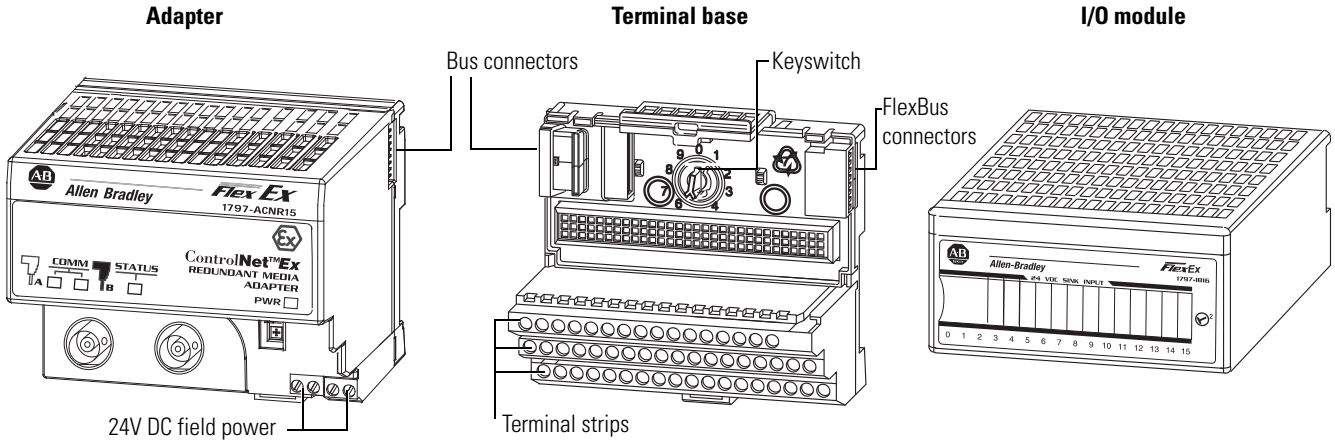


**FLEX Ex I/O leverages advanced technologies** allowing the application to move to a distributed architecture in the hazardous area. We have taken our experience gained with the standard FLEX I/O system and used it to create an intrinsically safe system with the same look, feel, and ease of use.

**Mounts without purged or explosion-proof enclosures in the hazardous area**. FLEX Ex I/O is a modular I/O system that eliminates the need for Intrinsic Safety (IS) barriers/isolators or long wiring runs to the control cabinet.

**One adapter communicates with up to eight I/O modules**. Allows connection to:

- 128 digital inputs/outputs, or
- 64 analog inputs, or
- mix to meet your needs.

**Redundant media ControlNet adapter** communicates with up to eight I/O modules and can be mounted in the hazardous area.

**Adjust the keyswitch** to prevent incorrect module insertion into a preconfigured terminal base.

**Exchange terminal bases** without moving other bases in your system.

**Connect FLEX Ex power supplies** to the terminal base that provides power to the I/O modules and field devices. No additional power supplies are needed.

**Plug the I/O module into the terminal base**. Use the module to connect to the I/O bus and field devices.

**Remove and insert modules under power**. No direct wiring to the module enables you to change modules without disturbing field wiring or system power.

**Mix and match I/O modules**. Wide variety of digital, analog, temperature, frequency, and HART modules.

**FlexBus Isolator allows** connection to standard FLEX I/O adapters and I/O thus providing a choice of other networks.

**Conformal coating** on all modules meets the noxious gas requirement of ISAS71.04-1985 severity level G3 for hydrogen sulfide, sulfur dioxide, chlorine, nitrogen dioxide, hydrogen fluoride, ammonia, and ozone.

FLEX Ex combines a terminal strip and intrinsic-safety isolation with an I/O interface. Use the terminal strip on the terminal base to wire your field devices directly. The FLEX Ex design also offers these features:

- modularity for distributed IS systems
- all of the features of a larger, rack-based system
- installation near the field devices to reduce wiring costs and complexity
- terminations for field wiring eliminating the need for marshalling or extra terminal strips
- ControlNet-based networking solution in the hazardous area with ControlNet Ex products
- DIN-rail mounting

FLEX Ex provides additional value if system problems develop. The terminal base lets you remove and insert I/O modules under power without rewiring or disrupting your system. Combining your field-wiring terminations, IS isolation, and the I/O interface into the same location saves you time, money, and makes your system easier to maintain and troubleshoot. Additional benefits include:

- galvanic isolation between the I/O backplane, input circuitry, and power supply
- dual-fault protection IS circuits provide the highest fault tolerance
- I/O circuitry provides full IS field-device protection
- the modules themselves are IS protected for installation in hazardous environments

FLEX Ex I/O modules may be removed and inserted while operating under power. Network module maintenance and cable connections can be made in the hazardous area while the system is in operation and the area is hazardous.

## FLEX Ex Typical Configurations

The following are typical configurations of FLEX Ex I/O in an intrinsically safe system:

- FLEX Ex I/O modules are interfaced through a ControlNet Ex I/O adapter module to a coax ControlNet segment that is confined to the hazardous area. This coax ControlNet Ex segment is interfaced through a ControlNet Ex coax drop repeater module and ControlNet Ex fiber media port adapter to a fiber-optic ControlNet segment, which is fed through from the safe area. A FLEX Ex power supply powers the repeater module, fiber media port adapter, ControlNet Ex I/O adapter module, and I/O modules individually. This configuration is best for long distances and a large number of nodes.
- The FLEX Ex ControlNet barrier allows connection to a ControlNet Ex I/O adapter module in the hazardous area via coax directly from the safe area. The barrier is mounted in the safe area. This is more economical for intermediate distances and nodes.
- Sensors and actuators in a hazardous area can be connected to FLEX Ex I/O modules, which are connected through a bus isolator module and connector to a FLEX I/O adapter in a safe area thus allowing connectivity to DeviceNet, ControlNet, Universal Remote I/O, and EtherNet/IP. This configuration may be most economical for low-point applications or when networks other than ControlNet are required.
- FLEX Ex I/O modules in a hazardous area can be connected through an extender cable to a FlexBus feed-through connector in an explosion-proof enclosure. Inside the enclosure, the feed-through connector is connected through a FLEX Ex extender cable, and then a bus isolator module and connector, to a FLEX I/O adapter.

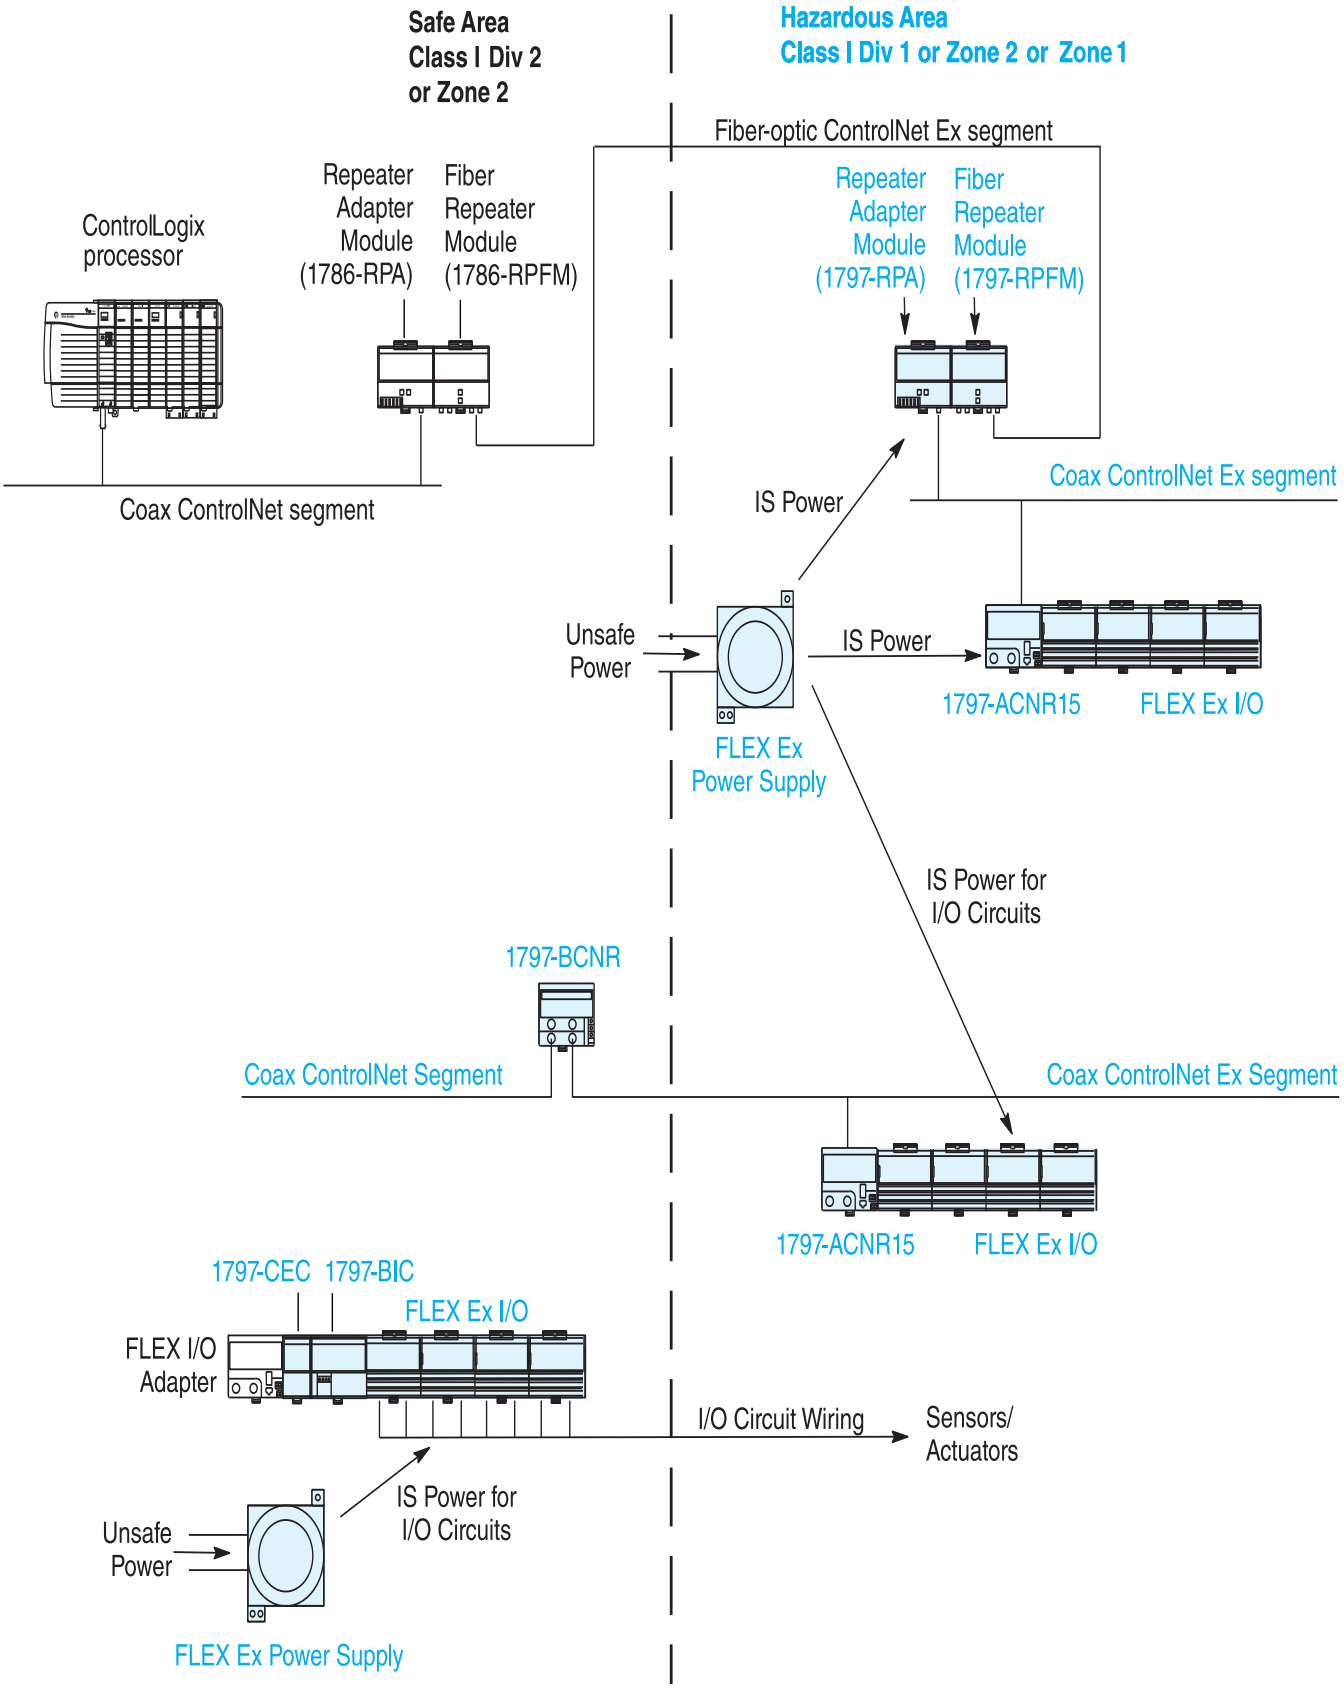
Safe Area
Class I Div 2
or Zone 2
Hazardous Area
Class I Div 1 or Zone 2 or Zone 1
Fiber-optic ControlNet Ex segment
Repeater Adapter Module (1786-RPA)
Fiber Repeater Module (1786-RPFM)
ControlLogix processor
Repeater Adapter Module (1797-RPA)
Fiber Repeater Module (1797-RPFM)
Coax ControlNet segment
Coax ControlNet Ex segment
IS Power
Unsafe Power
IS Power
1797-ACNR15
FLEX Ex I/O
FLEX Ex Power Supply
IS Power for I/O Circuits
1797-BCNR
Coax ControlNet Segment
Coax ControlNet Ex Segment
1797-ACNR15
FLEX Ex I/O
1797-CEC
1797-BIC
FLEX Ex I/O
FLEX I/O Adapter
I/O Circuit Wiring
Sensors/ Actuators
IS Power for I/O Circuits
Unsafe Power
FLEX Ex Power Supply

## Entity-Based Architecture

Entity parameters provide a system of quantifying and matching safe levels for voltage, current, inductance, and capacitance when connecting intrinsically safe field devices and system devices together.

Configuration of the FLEX Ex system is based on the entity parameter method. Using entity parameters allows high system flexibility in matching field and system devices. This provides maximum utility to the IS system designer and installer. For more information, refer to the FLEX Ex System Certification Reference Manual, publication 1797-RM001.

## Hazardous Area Designation

A hazardous area is designated as any location in which a combustible material is or may be present in the atmosphere in sufficient concentration to produce an ignitable mixture.

The North American method identifies these areas by Class, Division, and Group while the IEC (CENELEC) designates these areas by Zone and Gas Group.

Recently, North America has adopted the Zone method of identifying hazardous locations as an option to the Division method.

### Class Designation

Class identifies the type of hazardous atmosphere.

| | |
|---|---|
| Class I | Gas or vapor |
| Class II | Dust |
| Class III | Fiber or flying (no group designation) |

### Division/Zone Designations

Division/Zone identifies the likelihood of a hazardous atmosphere being present.

| | Division Method (North America) | IEC Standard Zone Method |
|---|---|---|
| Ignitable mixture present continuously (long periods) | Division 1 | Zone 0 (Zone 20 - Dust) |
| Ignitable mixture present intermittently | | Zone 1 (Zone 21 - Dust) |
| Ignitable mixture is not normally present | Division 2 | Zone 2 (Zone 22 - Dust) |

### Gas/Dust Groups

Hazardous locations are grouped according to their ignition properties.

| Typical Gas | North American Gas Group | IEC Gas Group |
|---|---|---|
| Acetylene | A | IIC |
| Hydrogen | B | |
| Ethylene | C | IIB |
| Propane | D | IIA |
| Methane[1] | D | I |
| Metal dust | E | — |
| Coal dust | F | |
| Grain dust | G | |

(1) Mining applications under jurisdiction of MSHA.

### *Use in North American Hazardous Locations*

FLEX Ex modules are rated for installation in Class I Division 1 & 2, Groups A-D hazardous areas. They are also rated to connect to field devices that are located in Class I, II, or III, Groups A-G hazardous areas.

If FLEX Ex components are to be installed in a Class II or III location in your application, you must mount them in a suitable, dust-proof enclosure with the appropriate connectors, glans, and seals. For example, a NEMA 9 enclosure may be appropriate. The FLEX Ex modules are rated to connect to devices located in Class II or III locations.

FLEX Ex modules are rated for installation in North American Class I Zone 1 & 2, Groups IIC, IIB, & IIA hazardous areas. They are also rated to connect to field devices that are located in North American Class I Zone 0, 1, & 2, Groups IIC, IIB, & IIA hazardous areas.

As always, observe local code requirements when applying your FLEX Ex application. For more information, refer to the FLEX Ex System Certification Reference Manual, publication 1797-RM001.

### *Use in ATEX Hazardous Locations*

FLEX Ex modules are rated for installation in European Zones 1, 2 and 22. They are also rated to connect to field devices that are located in European Zones 0, 1, 2, 21 and 22 hazardous areas. The FLEX Ex power supplies (1797-PS1E and -PS2E2) are rated for use in Zone 1 and 22.

If FLEX Ex components are to be installed in a European Zone method dust or fiber location in your application, you must mount them in an approved, dust-proof enclosure with the appropriate connectors, glans, and seals. Pepperl+Fuchs have three cabinets that are approved for use with FLEX Ex components in Zone 22 applications: IVK2-ISRPI-V8LC; IVK2-ISRPI-V8HYW; and IVK2-ISRPI-V16LC. P+F has offices in Twinsburg, Ohio, USA, and Mannheim, Germany. See their website at www.pepperl-fuchs.com.

As always, observe local code requirements when applying your FLEX Ex application. For more information and full certification, refer to the FLEX Ex System Certification Reference Manual, publication 1797-RM001.

## Specify a FLEX Ex System

Follow these steps as you specify your FLEX Ex I/O system:

| ✓ | Step | See | Page |
|---|---|---|---|
| | **1 Select an adapter and distribution method**<br>Choose an adapter and fiber hub or coax barrier to distribute FLEX Ex into the hazardous area. Or, choose a bus isolator pair to connect to various networks. | Select FLEX Ex I/O Communication Adapters and Distribution Method<br>1797-RPFM ControlNet Ex 3 km Fiber Media Port Adapter<br>1797-BCNR Coax Barrier Module<br>1797-BIC Bus Isolator Module and 1797-CEC FlexBus Connector | 81<br>84<br>84<br>86 |
| | **2 Determine the I/O devices**<br>• location of the device<br>• number of points needed<br>• appropriate catalog number<br>• number of points available per module<br>• number of modules | Digital I/O Modules<br>Analog Modules<br>HART Interface Modules<br>Counter I/O Module | 89<br>93<br>97<br>100 |
| | **3 Select a terminal base**<br>Choose an appropriate terminal base for your modules. | Terminal Base Wiring Diagrams | 105 |
| | **4 Select power supplies**<br>• Choose appropriate power supply<br>• Ensure sufficient power for the communication adapter and modules | Select a FLEX Ex I/O Power Supply<br>Understanding System Planning<br>Assigning Power Supplies<br>Hazardous Area Installation<br>General Specification Comparison | 107<br>108<br>110<br>111<br>107 |
| | **5 Select optional accessories**<br>• Determine whether to panel mount or DIN rail mount the FLEX I/O system and at what orientation (horizontal or vertical)<br>• Choose appropriate optional accessories to enhance your system | Mount the FLEX System<br>1794-CE1 and 1794-CE3 Extender Cables<br>1797-BOOT ControlNet BNC Boot<br>1797-INS Trunk Insulator and 1797-EXMK Marking Kit<br>ControlNet Ex Taps | 115<br>117<br>119<br>119<br>120 |

# Select FLEX Ex I/O Communication Adapters and Distribution Method

## Step 1 – Select:

*the communication adapter for the ControlNet Ex network the coax barrier to distribute into hazardous areas*

The diagnostic capabilities and determinism of the ControlNet network make it an ideal choice for distributing I/O into hazardous area applications.

The redundant media ControlNet Ex communications adapter (1797-ACNR15) is high speed and capable of communicating with as many as 8 I/O modules for up to 128 I/O points.

The ControlNet Ex segment in the hazardous area must be protected from other ControlNet segments in safe areas. Isolation can be achieved via two approaches: by converting coax to fiber with a pair of fiber hubs/repeaters or by using a coax barrier.

The combination of a ControlNet fiber hub (1786-RPA and -RPFM) and a ControlNet Ex fiber hub (1797-RPA and 1797-RPFM) allows for flawless, high-speed, deterministic data flow and messaging between hazardous and safe areas. This combination functions as an intrinsically safe isolator between hazardous and safe areas and can provide long-distance communication up to three kilometers. It is best for longer distance and largest number of adapters and I/O points.

An intrinsically safe network and I/O system installed in the hazardous area allows your data to be gathered at its origin and transported out of the area with minimum amount of wiring. Cable penetrations into the hazardous area, cable trays, and conduit are all drastically reduced.:

**Network Comparison by Application Requirement**

| Catalog Number. | Description | Agency Certification | Intrinsically Safe Output Characteristics | Intrinsically Safe Power Supply (V, -V) | See page: |
|---|---|---|---|---|---|
| 1797-ACRN15 | Redundant media ControlNet Ex adapter | Class I Division 1 Groups A…D T4<br>Class I Zone 1 AEx ib IIC T4 | 16 position male/female FlexBus connector:<br>$U_0 \leq 5.4V$ DC<br>$I_0 \leq 400$ mA<br>$P_0 \leq 2.16$ W<br>$L_0 \leq 10$ µH<br>$C_0 \leq 65$ µF | $U_i \leq 9.5V$ DC<br>$I_i \leq 1$ A<br>$P_i \leq 9.5$ W<br>$L_i$ = Negligible<br>$C_i \leq 120$ nF | 83 |

### Network Comparison by Application Requirement

| Catalog Number. | Description | Agency Certification | Intrinsically Safe Output Characteristics | Intrinsically Safe Power Supply (V, -V) | See page: |
|---|---|---|---|---|---|
| 1797-RPA | ControlNet Ex modular repeater adapter | Class I Division 1 Groups A…D T4<br>Class I Zone 1 AEx ib IIC T4<br>Class II Division 1 Groups E, F, G; Class III(1) | 30 pin male TTL bus connector<br>$U_0 \leq 5.4V$ DC<br>$I_0 \leq 201mA$<br>$P_0 \leq 1.09$ W<br>$L_0 \leq 0.45$ µH<br>$C_0 \leq 71$µF | $U_i \leq 9.5V$ DC<br>$I_i \leq 1A$<br>$P_i \leq 9.5$ W<br>$L_i$ = Negligible<br>$C_i \leq 120$ nF | 83 |
| 1797-RPFM | ControlNet Ex fiber repeater module, medium distance | Class I Division 1 Groups A-D T4<br>Class I Zone 1 AEx ib [ia] IIC T4<br>Class II Division 1 Groups E, F, G; Class III(1) | 30 pin male TTL bus connector<br>$U_0 \leq 5.4$<br>$I_0 \leq 201$ mA<br>$P_0 \leq 1.1$ W<br>$L_0 \leq 0.45$ mH<br>$C_0 \leq 71$ µF | — | 84 |
| 1797-BCNR | Redundant ControLnet galvanic isolation barrier module | II (2) G [EEx ib] IIC | Open circuit voltage $U_0 = 7V$, max<br>$I_0 = 14$ mA (at the resonant frequency of 66kHz) | — | 84 |
| 1797-BIC | Bus isolator module | Nonincendive, use for Class I, Division 2 Groups A…D or Class I, Zone 2 Group IIC<br>Provides intrinsically safe outputs to Class I, Division 1 Groups A…D or Class I, Zone 1 Group IIC | $V_t \leq 5.75V$ DC<br>$I_t \leq 3.98.25$ mA<br>$C_a \leq 39.67$ µF<br>$L_a \leq 210$ µH | — | 86 |
| 1797-CEC | FlexBus connector module | Nonincendive, use for Class I, Division 2 Groups A…D or Class I, Zone 2 Group IIC | — | — | 86 |

(1) For Class II Division 1 Groups E, F, G and Class III, modules must be installed in a UL listed Type 4, 4X, 6, 6P, 9, 12, or 12K enclosure.

**Figure 1 - Distribution Between Areas**

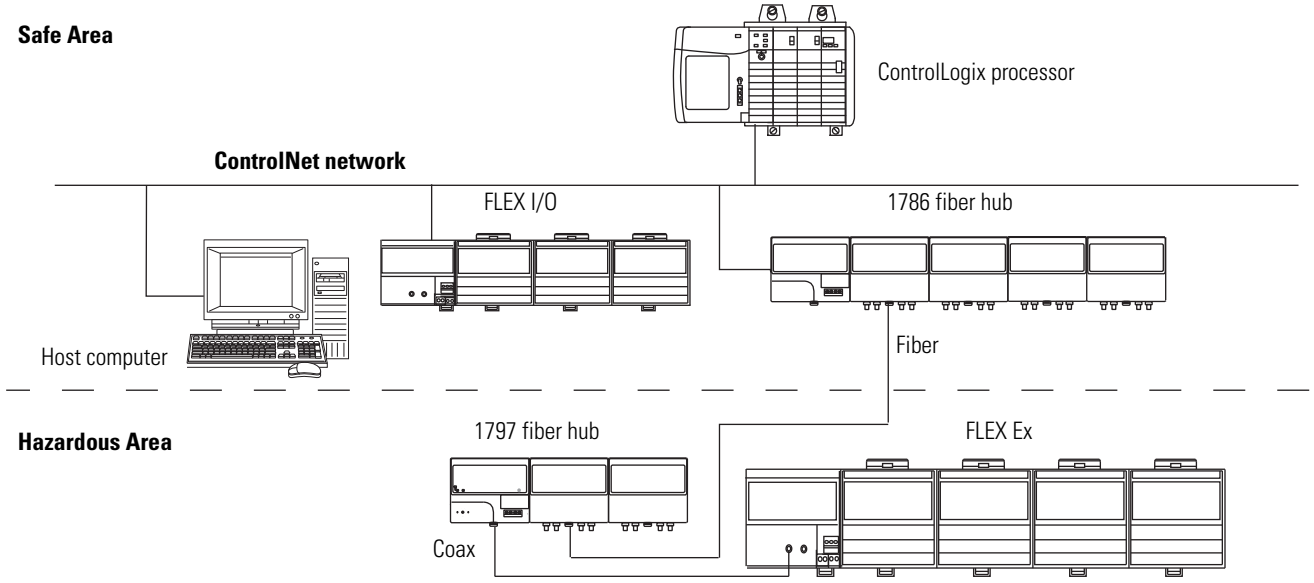

## 1797-ACNR15 Dual Media ControlNet Ex 1.5 Adapter

The 1797-ACNR15 interfaces FLEX Ex I/O modules to a coax segment of a ControlNet Ex I/O link. It provides power to the backplane to run bus interface circuitry aboard I/O modules and is capable of dual ControlNet Ex cable media.

**FLEX I/O EtherNet/IP Adapter Specifications**

| Attribute | 1797-ACNR15 |
|---|---|
| I/O module capacity | 8 |
| Temperature, operating | -20…70°C (-4 …185°F) |
| Communication interface | Quad-shield RG-6 coax |
| Communication rate | 5 Mbps |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| Dimensions (HxWxD), approx | 94 x 94 x 91 mm<br>(3.7 x 3.7 x 3.58 in.) |
| Weight, approx. | 0.2 kg (0.44 lbs) |
| Thermal dissipation | 29 BTU/hr |

## 1797-RPA ControlNet Ex Coax Drop Repeater Module

The 1797-RPA functions as part of the fiber repeater hub within the hazardous area to extend the length of the ControlNet Ex segments to interlink systems all operating within the area. It functions as the intelligent starter block for a multiport repeater and is configured with at least one media adapter.

**FLEX I/O ControlNet Adapter Specifications**

| Attribute | 1797-RPA |
|---|---|
| Fiber media port adapter capacity | 2 |
| Temperature, operating | -20…70°C (-4 …185°F) |
| ControlNet cable | Quad-shield RG-6 coax |
| Communication rate | 5 Mbps |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| Power dissipation | 8.5 W |
| Dimensions (HxWxD), approx | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |
| Weight, approx. | 0.2 kg (0.44 lbs) |
| Thermal dissipation | 29 BTU/hr |

## 1797-RPFM ControlNet Ex 3 km Fiber Media Port Adapter

The 1797-RPFM (part of the fiber repeater hub) functions as a non-intelligent fiber to backplane conversion device and converts glass fiber infrared LED media signals to backplane signals for use by the 1797-RPA repeater module.

**FLEX I/O DeviceNet Adapter Specifications**

| Attribute | 1797-RPFM |
|---|---|
| Communication interface | Fiber optic cable |
| Fiber type | 62.5/125 mm |
| Fiber termination type | ST (plastic or ceramic) |
| Communication rate | 5 Mbps |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| Power dissipation | Included in 1797-RPA |
| Dimensions (HxWxD), approx | 94 x 94 x 91 mm (3.7 x 3.7 x 3.58 in.) |
| Weight, approx. | 0.1 kg (0.22 lbs) |
| Thermal dissipation | Included in 1797-RPA |

## 1797-BCNR Coax Barrier Module

The redundant media ControlNet coax barrier (1797-BCNR) isolates the ControlNet segment in the safe area from that in the hazardous area. It allows connection into the hazardous area without converting to/from fiber media. The barrier can support up to 20 adapters and distances up to 500 meters. Thus, it addresses intermediate size applications in a highly cost-effective manner. The barrier can be mounted in safe, Division 2 or Zone 2 areas.

When using a 1797-BCNR, the total allowable length of a segment containing standard RG-6 quad-shield cable depends on the number of taps in your segment. There is no minimum trunk-cable section length requirement. The maximum allowable length of a segment that contains a 1797-BCNR is 500 m (1640 ft) with two taps connected. Each additional tap decreases the maximum length of the segment according to the chart. The maximum number of taps allowed on a segment is 20 with a maximum length of 250 m (820 ft).

### FLEX I/O Remote I/O Adapter Specifications

| Attribute | 1797-BCNR |
|---|---|
| Temperature, operating | -20…70°C (-4 …185°F) |
| ControlNet Ex system characteristics | $U_o$ = 7V<br>$I_o$ = 55 mA @ 52 KHz<br>$P_o$ = negligible |
| Non Ex ControlNet characteristics | $U_n$ = 5V<br>$U_m$ = 253V AC<br>I = not defined<br>P = not defined |
| ControlNet communication rate | 5 Mbps |
| Transmission attenuation | -7.84 dB |
| Noxious Gas exposure | — |
| Dimensions (HxWxD), approx. | 70 x 100 x 90 mm<br>(2.76 x 3.94 x 3.55 in.) |
| Weight, approx. | 0.2 kg (0.44 lbs) |

## 1797-BIC Bus Isolator Module and 1797-CEC FlexBus Connector

The bus isolator modules, 1797-BIC and -CEC, allow you to configure FLEX Ex modules and FLEX I/O modules on the DIN Rail when attached to the same adapter and grouped together on appropriate sides of the bus isolator module. This highly flexible, cost-effective solution combines intrinsically safe and non-intrinsically safe systems.

Intermixed system can be configured for use in the:

- safe area much like traditional IS and I/O systems
- hazardous and safe control equipment where the distance of physical separation is short
- FLEX Ex I/O with communication adapters that are not intrinsically safe

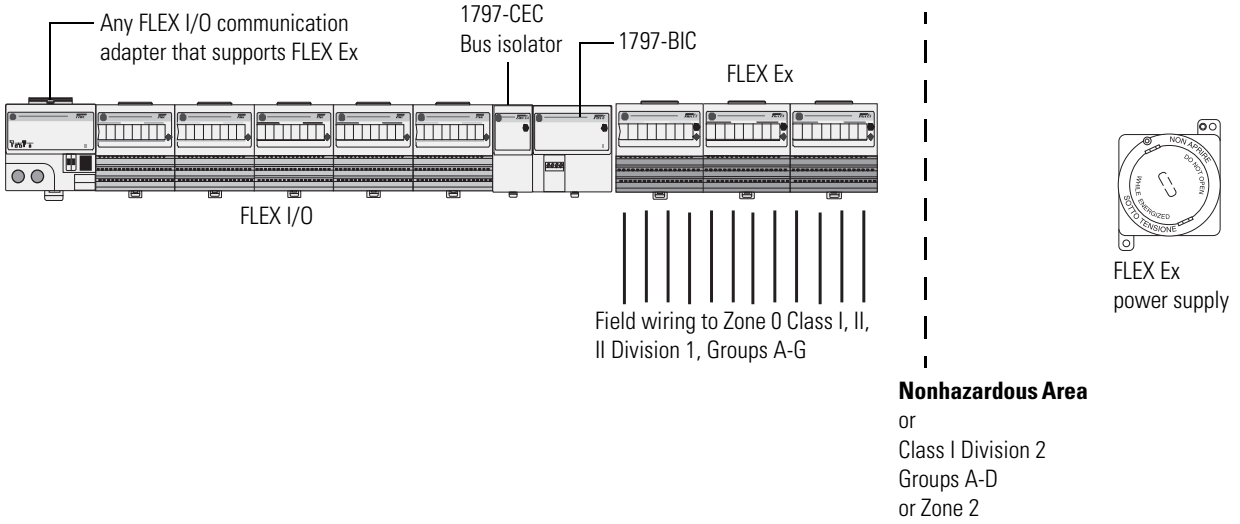


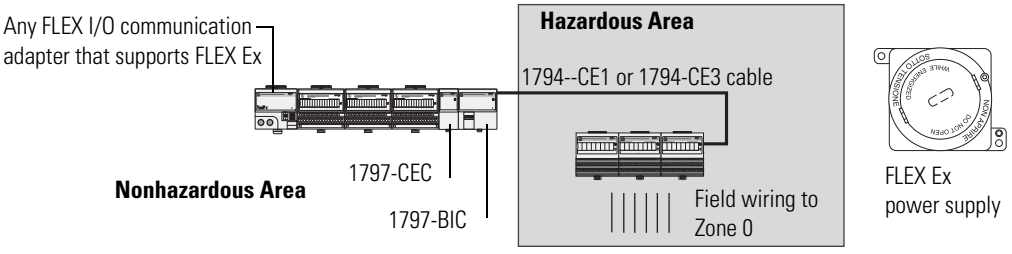


The 1797-BIC and -CEC modules provide an IS-compatible mechanism to separate two sections of the backplane, allowing IS and non-IS field-device wiring to the same I/O group. It converts hazardous power to IS-safe power to run one side of the bus receiver/transmitter circuitry and IS-safe power to slave side modules. A total of eight I/O modules (1794 FLEX I/O or 1797 FLEX Ex I/O) may be attached to the adapter.

When combining 1794 FLEX I/O and 1797 FLEX Ex I/O, the 1794 FLEX I/O modules are placed to the left of the 1797-BIC and -CEC modules while the 1797 FLEX Ex I/O modules are placed on the right.

**IMPORTANT** A FLEX Ex power supply (1797-PSxxx) must be used to power the 1797 FLEX Ex I/O regardless of where they are located.

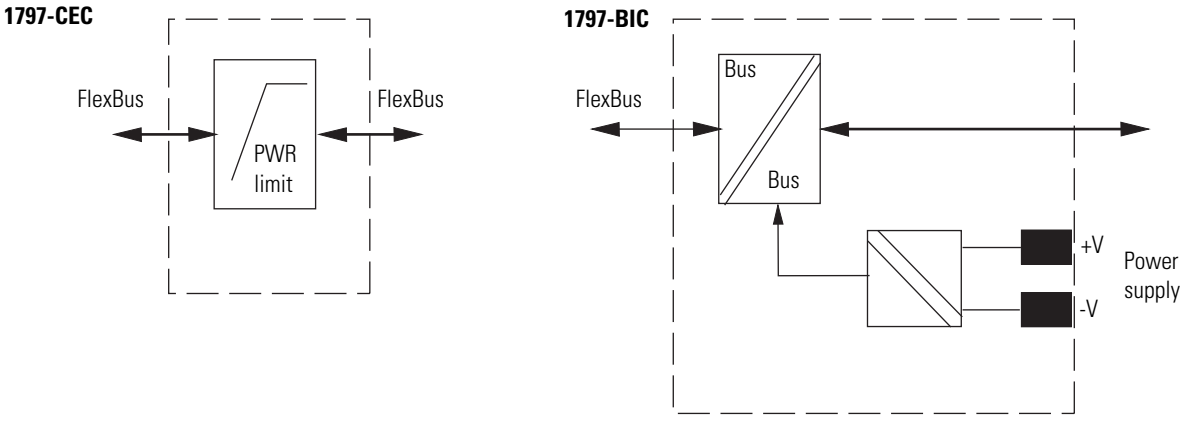


| Attribute | 1797-BIC |
|---|---|
| I/O module capacity | 8(1) |
| Isolation voltage | System to System and System Slave Side to Power Supply: Galvanic to DIN EN 50020 |
| Power consumption, max | 0.15 A @ 18…32V DC |
| Power source failure, max input | $U_m$ = 253V AC |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| Power dissipation | 2.1 W |
| Thermal dissipation | 7.2 BTU/hr |
| Dimensions<br>HxWxD | 87 x 94 x 75 mm<br>3.4 x 3.7 x 2.95 in. |
| Weight, approx. | 0.2 kg (0.44 lbs) |

(1) 8 FLEX Ex modules. Note that a total of eight I/O modules can be attached to a 1794 FLEX I/O adapter. The 1797-BIC and 1797-CEC are not included in this number. In intermixed systems, the number of 1797 FLEX Ex I/O modules (attached onto the 1797-BIC) plus the number of 1794 FLEX I/O modules (connected between the adapter and the 1797-CEC) cannot exceed eight.

## Notes:

# Select FLEX Ex I/O Modules

## Step 2 – Select:

*I/O modules based on field devices*

FLEX Ex follows a producer/consumer model for remote I/O. Input modules produce data for the system. Controllers, output modules, and intelligent modules produce and consume data. The producer/consumer model multicasts data. This means that multiple nodes can consume the same data at the same time from a single device.

FLEX Ex I/O modules offer 2 through 16 I/O each. You can connect together a maximum of eight FLEX Ex I/O modules with a FLEX Ex I/O adapter, for a maximum of 128 I/O per assembly.

Mix and match digital and analog I/O to meet your application needs.

## Digital I/O Modules

Digital I/O modules have digital I/O circuits that interface to on/off sensors (pushbuttons and limit switches) and actuators (motor starters, pilot lights, and annunciators).

These outputs are controlled by the PLC controller while the inputs control the state of corresponding bits in the PLC.

### Features

- Modules detect, indicate, and report the following faults:
  - open input or output field devices or wiring
  - shorted output field devices
  - shorted input or output wiring
  - Selectable input filter times from less than 1 to 33 ms.
- LED for each channel indicating status of:
  - corresponding input device
  - output signal

**Digital I/O Module Summary**

| Catalog Number | Inputs | Outputs | Terminal Base Unit | Electrical Range | Module Type |
|---|---|---|---|---|---|
| **Input Modules** | | | | | |
| 1797-IBN16 | 16 | — | 1797-TB3, 1797-TB3S | — | Nonisolated NAMUR inputs |
| **Output Modules** | | | | | |
| 1797-OB4D | — | 4 | 1797-TB3, 1797-TB3S | — | Nonisolated source outputs |

# Modules Specifications

The following section shows more detailed module specifications in comparative groups to facilitate your selection based on your requirements.

## 1797-IBN16 16 Point Non-isolated NAMUR Input Module

- Fault detection, fault bits in data table and status indicator LED (per channel) blinking red (1 Hz)
- Lead breakage defeat on four-channel group basis via module DIP switch selection
- Fault detection can be disabled via data table
- Programmable digital input filtering 1...33 ms (OFF to ON and ON to OFF)
- All channels updated to FlexBus ≤ 500 µs
- Compatible with NAMUR sensors and dry contacts

**Schematic drawing of the 1797-IBN16 module**

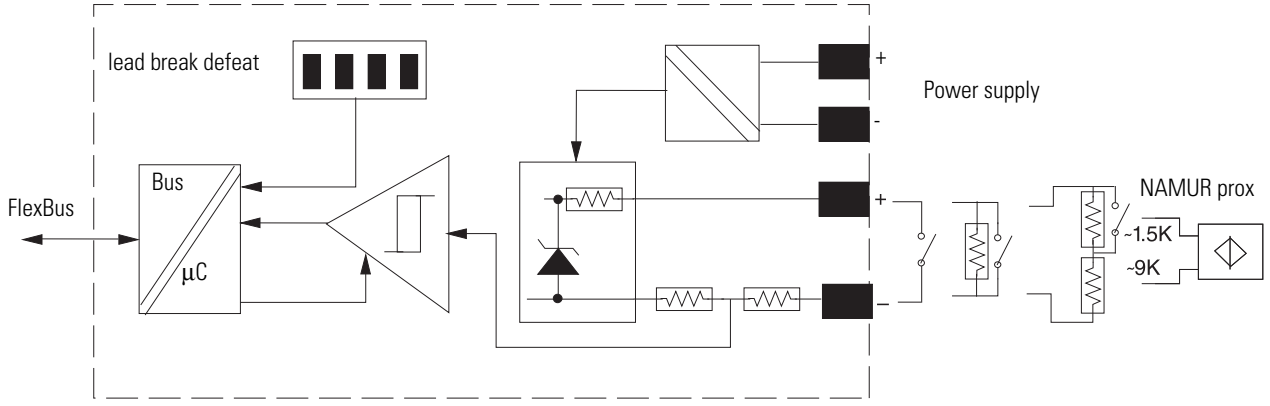


**16 Point Non-isolated NAMUR Input Module**

| Specification | 1797-IBN16 |
|---|---|
| Number of inputs | 16 |
| Input type | EN 60947-5-6, NAMUR compatible |
| Current, on-state input, min | 2.1 mA |
| Current, off-state input, max | 1.2 mA |
| Hysteresis | 0.2 mA |
| Input frequency, max | 1000 Hz |
| Input pulse width | ≥25µs for on or off |
| Load voltage, max | U/V = 7.5V DC |
| Short circuit current | 7.5 mA |
| Short circuit threshold current | > 6 mA |
| Lead breakage threshold current | ≤ 0.15 mA |
| Input delay time, OFF to ON | 1 ms, 2 ms, 3 ms, 5 ms, 9 ms, 17 ms, 33 ms(1) |
| Input delay time, ON to OFF | 1 ms, 2 ms, 3 ms, 5 ms, 9 ms, 17 ms, 33 ms(2) |

**16 Point Non-isolated NAMUR Input Module**

| Specification | 1797-IBN16 |
|---|---|
| Intrinsically safe input type | II (1)2G Ex ib[ia] IIC T4<br>Class I,<br>Div. 1, Groups A-D and Class I, Zone 1,<br>AEx ib/[ia] IIC |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| FLEX Ex power consumption | 2.8 W @ 9V |
| Power dissipation | 2.8 W |
| Thermal dissipation, max | 9.6 BTU/hr |
| Dimensions (HxWxD), approx | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |

(1) 1 ms default selectable.

(2) 1 ms default selectable.

## 1797-OB4D 24V DC 4 Point Non-isolated Source Output Module

- 4 output channels referenced to a single supply
- Yellow LED to indicate output state, output ON = LED ON
- Fault indication, signal to the backplane and status indicator LED (per channel) blinking red for fault
- Output short circuit detection
- Output wire-off detection
- Output wire-off detection on per channel basis via module data bit
- Electronically short-circuit protected, fault reported to controller
- All channels updated from the backplane every 2 ms
- Output fault state programmable

**Schematic Drawing of the 1797-OB4D Module**

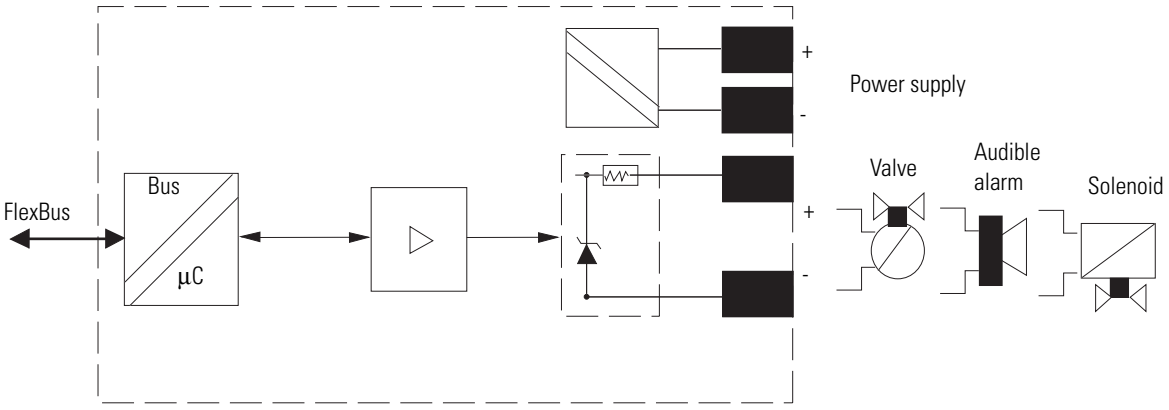

### 24V DC 4 Point Non-isolated Source Output Module

| Specification | 1797-OB4D |
|---|---|
| Number of outputs | 4 |
| Output load range | 30…5000 Ω |
| Fault detection | Fault bits in data table and LED (per channel) blinking red (1 Hz) |
| Protection | Overload |
| Output delay time, OFF to ON | ≤ 1.2 ms |
| Output delay time, ON to OFF | ≤ 1.2 ms |
| Intrinsically safe output type | II (1)2G Ex ib[ia] IIC T4<br>Class I,<br>Div. 1, Groups A-D and Class I, Zone 1,<br>AEx ib/[ia] IIC |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| FLEX Ex power consumption | 7.5 W @ 9V |
| Power dissipation | 5 W |
| Thermal dissipation, max | 17.07 BTU/hr |
| Dimensions (H x W x D) | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |

### 1797-OB4D Output Voltage/Current Capability

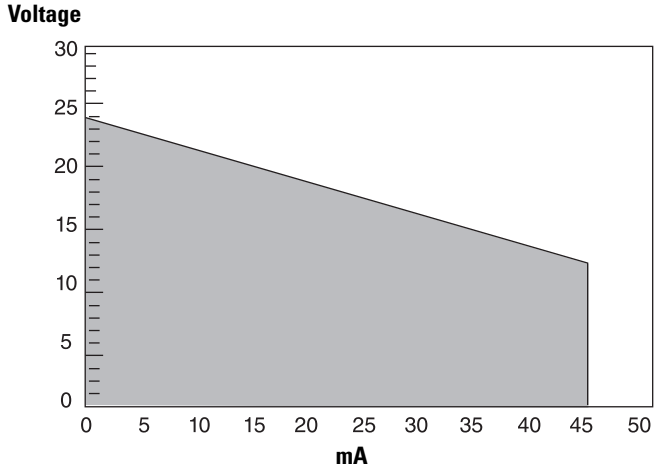

## Analog Modules

Choose analog I/O modules when you need:

- **Configurable channels** allow the module to be used with a variety of sensors.
- **On-board scaling** eliminates the need to scale the data in the controller. Controller processing time and power are preserved for more important tasks, such as I/O control, communications, or other user-driven functions.
- **On-line configuration**. Modules can be configured in RUN mode using the programming software or the control program. This allows you to change configuration while the system is operating. For example, the input filter for a particular channel could be changed, or a channel could be disabled based on a batch condition.
- **Over- and under-range detections and indications** eliminates the need to test values in the control program, saving valuable processing power of the controller. In addition, since alarms are handled by the module, the response is faster and only a single bit needs to be monitored to determine if an error condition has occurred.
- **Ability to direct output device operation during an abnormal condition**. Each channel of the output module can be individually configured to hold its last value or assume a user-defined value on either a run-to-program or run-to-fault condition. This feature allows you to set the condition of your analog devices, and therefore your control process, which may help to ensure a reliable shutdown.
- **Selectable input filters** allows you to select from several different filter frequencies for each channel that best meets the performance needs of your application based on environmental limitations. Lower filter settings provide greater noise rejection and resolution. Higher filter settings provide faster performance.
- **Selectable response to broken input sensor**. This feature provides feedback to the controller that a field device is not connected or operating properly. This allows you to specify corrective action based on the bit or channel condition.

**Analog I/O Module Summary**

| Catalog Number | Inputs | Outputs | Terminal Base Unit | Signal Range | Module Type |
|---|---|---|---|---|---|
| **Input Modules** | | | | | |
| 1797-IE8 | 8 | — | 1797-TB3, 1797-TB3S | 0…20 mA | 16-bit single-ended, nonisolated inputs |
| 1797-IE8H | | | | | 16-bit single-ended, nonisolated inputs with HART capability |
| 1797-IE8NF | | | | | 16-bit single-ended, nonisolated inputs with noise filter |
| 1797-IRT8 | | | | 0…500 Ω<br>-40…100 mV<br>TC<br>RTD | 16-bit, nonisolated RTD thermocouple/mV inputs |

**Analog I/O Module Summary**

| Catalog Number | Inputs | Outputs | Terminal Base Unit | Signal Range | Module Type |
|---|---|---|---|---|---|
| **Output Modules** | | | | | |
| 1797-OE8 | — | 8 | 1797-TB3, 1797-TB3S | 0…20 mA<br>4…20 mA | 16-bit single-ended, nonisolated outputs |
| 1797-OE8H | | | | | 16-bit single-ended, nonisolated outputs with HART capability |

## Module Specifications

The following section shows more detailed module specifications in comparative groups to facilitate your selection based on your requirements.

### 1797-IE8, 1797-IE8H (HART), and 1797-IE8NF (with Noise Filter) 8 Point 16-bit Single-ended Non-isolated Analog Input Modules

Eight single-ended input channels referenced to a single common

- 3-wire input for 2- and 3-wire transmitters
- Functional data: normal input
  input current = 4...20 mA, full-current range
  0...22 mA to allow for over and underrange indication
- Wire-off detection, signal to the backplane and LED (per channel) blinking red for fault
- Wire-off detection on per channel basis via module data bits
- Input filter cutoff programmable
- Resolution: 16 bits
- Accuracy: 0.1%
- The 1797-IE8 is typically used to act on change-of-state and high-speed applications. It is not compatible with HART handheld devices.
- The 1797-IE8NF has additional hardware filtering that damps out spurious signals and can be used for slower changing, steady-state processes. It has slower step response than the 1797-IE8 (100 ms versus 4 ms). It is compatible with HART handheld devices.
- The 1797-IE8H is similar to the 1797-IE8NF with real time data table updates. It also supports pass-through of HART commands as unscheduled ControlNet messages. It is compatible with FDT software packages.

**Schematic Drawing of the 1797-IE8 Module**

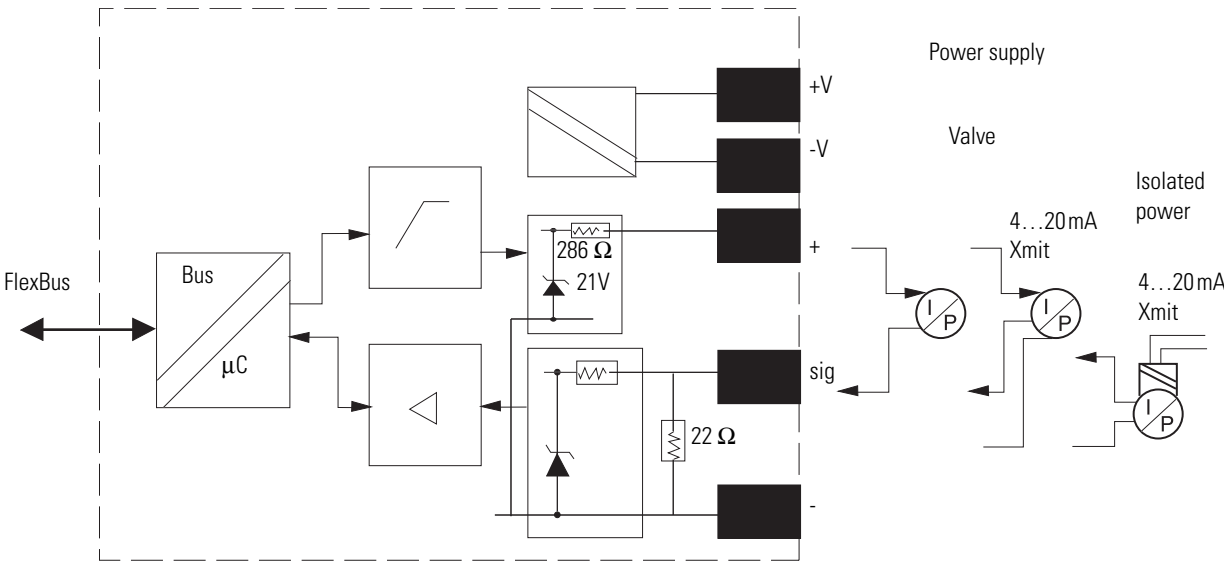


**FLEX Ex Analog Input Comparison**

| Specification | 1797-IE8 | 1797-IE8NF | 1797-IE8H |
|---|---|---|---|
| Input resolution | 16 bits | | |
| Input signal range | 0…22 mA | | |
| Transfer characteristics, temperature drift | 0.1% of output signal range at 20 °C (68 °F) | | |
| Functional data range | > 15V @ 22 mA<br>> 21.5V @ 0 mA | | > 17V @ 22 mA<br>> 23V @ 0 mA |
| Data format | Configurable | | |
| Step response to 99% of Full Scale | 4 ms | 80 ms | 100 ms |
| Update time, module to adapter | 200…1600 µs | | |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 | | |
| FLEX Ex power consumption | 7.5 W @ 9V | | 7.1 W @ 9V |
| Power dissipation, max | 5.2 W | | |
| Thermal dissipation, max | 17.75 BTU/hr | | 13.5 BTU/hr |
| Instrinsically safe input type | $U_0 \leq$ 23.7V<br>$I_0 \leq$ 93.5 mA<br>$P_0 \leq$ 555 mW | | $U_0 \leq$ 24.4V<br>$I_0 \leq$ 92.5 mA<br>$P_0 \leq$ 565 mW |
| | II (1)2G Ex ib[ia] IIC T4<br>Class I,<br>Div. 1, Groups A-D and Class I, Zone 1,<br>AEx ib [ia] IIC | | |
| Dimensions (HxWxD), approx. | 46.0 x 94.0 x 75.0 mm<br>(1.8 x 3.7 x 2.95 in.) | | |

## 1797-IRT8 8 Point 16-bit Non-isolated RTD Thermocouple/mV Input Module

- input channels referenced to a single common
  - RTD mode
  - RTD types Pt100, Pt200, Ni100, Ni200, Ni120, Cu10
  - 2-, 3-, and 4-wire connection
  - sensor lead breakage and short circuit detection all 4 leads
  - measuring resistance 0...500 Ω
  - accuracy: 0.1% of span at 20 °C, filter cutoff < 1 Hz
- mV mode
  - input voltage -40...100 mV differential sensing
  - sensor breakage detection
- thermocouple mode
  - types B, E, J, K, TXK/XK (L), N, R, S, T
  - cold junction compensation (CJC)
  - external reference junction (programmable)
  - sensor breakage detection
  - accuracy: 0.1% of span, filter cutoff < 1 Hz
  - accuracy of CJC: ± 1 C/K

**Schematic Drawing of the 1797-IRT8 Module**

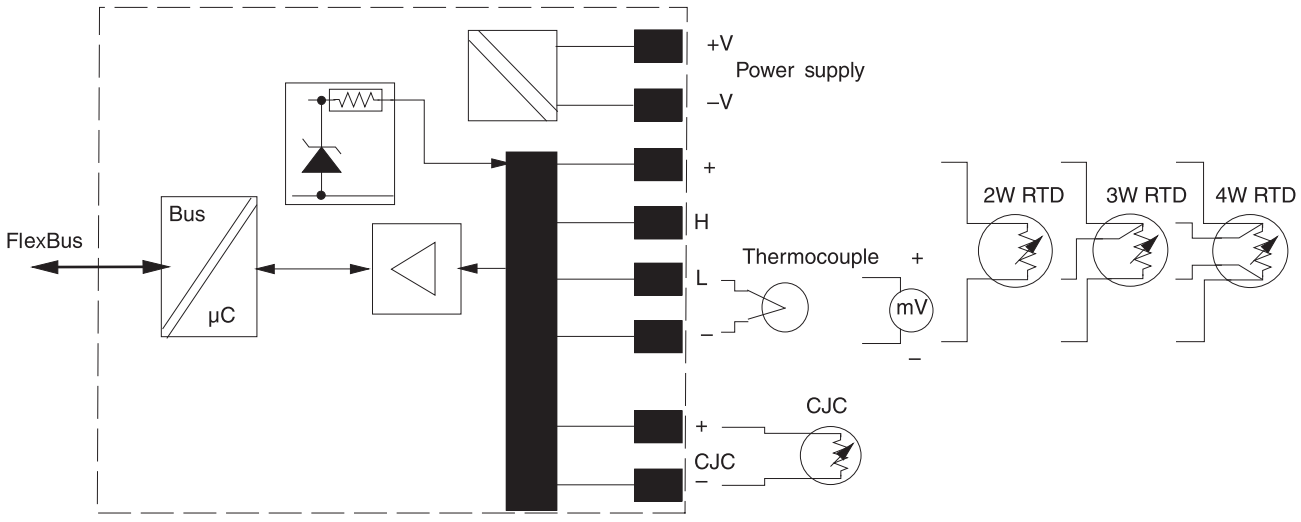


**8 Point 16-bit Non-isolated RTD Thermocouple/mV Input Module**

| Specification | 1797-IRT8 |
|---|---|
| Input type | Suitable for Pt 100, Pt200, Ni 100, Ni120, Ni200, Cu10<br>RTD, Thermocouple Type B, E, J, K, N, R, S, T, TXK/XK(L)<br>Configuration via internal bus |

**8 Point 16-bit Non-isolated RTD Thermocouple/mV Input Module**

| Specification | 1797-IRT8 |
|---|---|
| Input signal range | 0…500 Ω<br>-40…100 mV<br>TC<br>RTD |
| Settling time | 8 ms to 99% of final value (mV mode, °F thermocouple) |
| Open RTD detection | Out of range upscale reading |
| Lead resistance compensation | < 15 Ω total |
| Transfer characteristics, accuracy | RTD: 0.1% of span @ 20 °C, filter cutoff < 1 Hz<br>Thermocouple: 0.1% of span @ 20 °C, filter cutoff < 1 Hz<br>Cold junction compensation: ± 1 °C |
| Temperature drift | 150ppm/ °C (primary range) |
| Data organization | Overrange Alarm – Individually for each channel<br>Lead Breakage Alarm – Individually for each channel<br>Fault State – Individually for each channel (includes overrange, lead breakage and short circuit)<br>Sensor Mode RTD 2, 3, or 4-wire – Common to groups of 4 channels (ch 0…3, ch 4…7)<br>TC Sensor Type (for example TC, Type B, E, J..., RTD or mV) - Common to groups of 4 channels (ch 0…3, ch 4…7)<br>Internal Reference Junction (TC mode) – Common to all channels (0 °C, 20 °C, 25 °C, 30 °C, 40 °C, 50 °C, 60 °C, 70 °C |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| FLEX Ex power consumption | 1.6 W @ 9V |
| Power dissipation, max | 1.6 W |
| Thermal dissipation, max | 5.46 BTU/hr |
| Dimensions (H x W x D) | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |

## HART Interface Modules

FLEX Ex HART analog modules (1797-IE8H and 1797-OE8H) are ideal for use in applications that need connection with FDT (Field Device Tool) compatible asset management software, such as Rockwell Software FieldCare HART Communication bundle or Endress + Hauser Fieldcare. For HART Device Type Management (DTM) programs and drivers, go to http://www.ab.com/io, and select Configurations Files, DTM files for HART.

- FLEX HART analog modules can be used on ControlNet or EtherNet/IP. The FLEX Ex Ethernet adapter requires firmware v3.1 or later, which is flash upgradeable, to support these modules.
- Each HART field device is wired to its own input or output channel:
  - 8 single-ended channels
  - does not support multi-drop
  - 2- or 3-wire devices
- HART commands can be transmitted by unscheduled message:
  - sample RLL subroutines are available.
  - currently limited to one instance of RLL subroutine per module, one channel at a time.

# FLEX Ex I/O Analog Output Modules

## 1797-OE8 and 1797-OE8H (HART) 8 Point 13-bit Single-ended Non-isolated Analog 8 Output Module

- Eight dual-ended output channels referenced over sense resistors to a single common
- Functional data:
  - normal output
  - current = 4...20 mA, full current
  - range = 0...22 mA to allow for over- and under-range indication
- Output wire-off detection, LED (per channel) blinking red for fault, threshold < 2 mA
- Output wire-off detection on per channel basis via module data bits
- Short circuit detection
- All channels updated to the backplane every 4 ms
- Resolution: 13 bits
- Accuracy: 0.1%
- One power supply loop for one module
- Output fault state programmable
- The 1797-OE8 and 1797-OE8H can be used in digital mode for low energy digital field devices.
- The 1797-OE8H is similar to the 1797-OE8 with real time data table updates. It also supports pass-through of HART commands as unscheduled ControlNet messages. It is compatible with FDT software packages.

**Schematic Drawing of the 1797-OE8 and 1797-OE8H Modules**

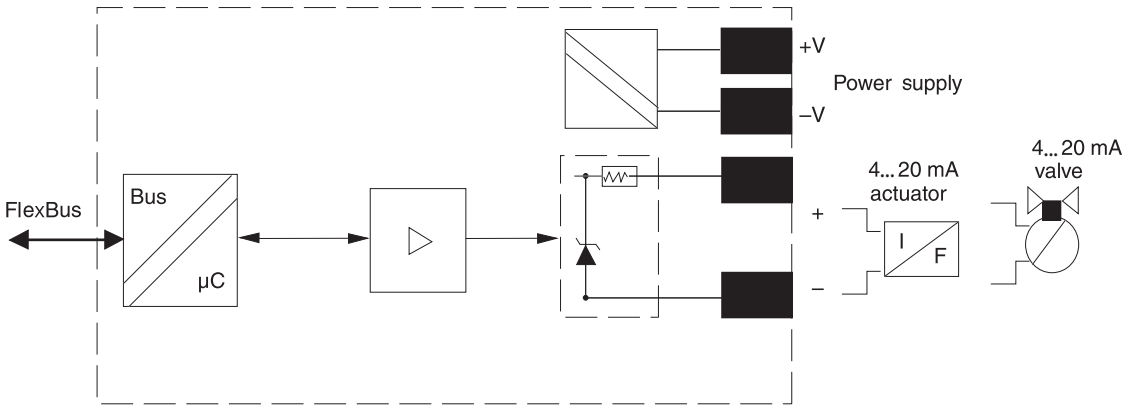


**8 Point 13-bit Single-ended Non-isolated Analog 8 Output Modules**

| Specification | 1797-OE8 | 1797-OE8H |
|---|---|---|
| Output resolution | 13 bits | |
| Output load range | 0…500 Ω @ 22 mA<br>> 11V @ 22 mA | 0…680 Ω @ 22 mA<br>> 15V @ 22 mA |
| Step response to 99% of Full Scale | 4 ms | 18 ms;<br>115 ms with HART active |

### 8 Point 13-bit Single-ended Non-isolated Analog 8 Output Modules

| Specification | 1797-OE8 | 1797-OE8H |
|---|---|---|
| Transfer characteristics, accuracy | 0.1% of output signal at 20 °C (68 °F) | |
| Transfer characteristics, temperature drift | 0.010%/C of output signal range | |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 | |
| FLEX Ex power consumption | 6.3 W @ 9V | 6.1 W @ 9V |
| Power dissipation, max | 5.4 W | 6.1 W |
| Thermal dissipation, max | 18.4 BTU/hr | 20.8 BTU/hr |
| Intrinsically safe output type | II (1)2G Ex ib[ia] IIC T4<br>Class I,<br>Div. 1, Groups A-D and Class I, Zone 1,<br>AEx ib [ia] IIC | |
| Instrinsically safe input characteristics | Ch 0…7<br>Terminals: 0…1; 4…5; 8…9; 12…13; 17…18; 21…22; 25…26; 29…30<br>$U_0 \leq$ 21V<br>$I_0 \leq$ 100 mA<br>$P_0 \leq$ 520 mW | Ch 0…7<br>Terminals: 0…1; 4…5; 8…9; 12…13; 17…18; 21…22; 25…26; 29…30<br>$U_0 \leq$ 21.6V<br>$I_0 \leq$ 92 mA<br>$P_0 \leq$ 500 mW |
| Dimensions (H x W x D), approx | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed | |

### 1797-OE8 Output Voltage/Current Capability

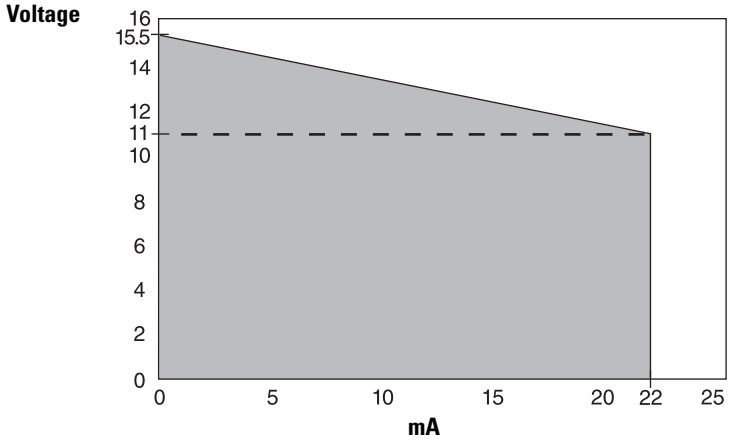

**1797-OE8H Output Voltage/Current Capability**

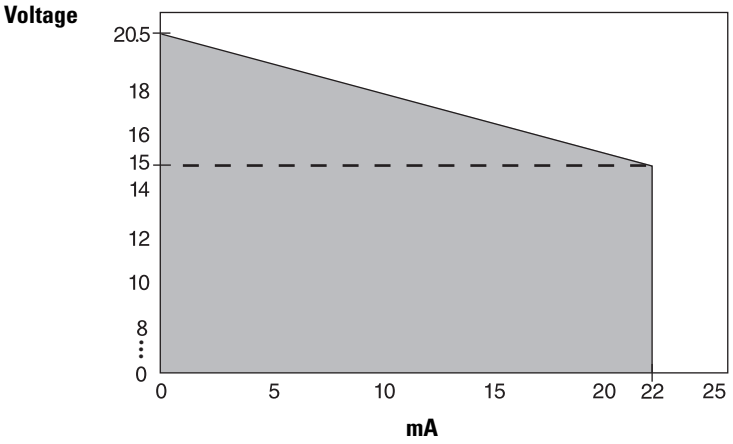


## Counter I/O Module

Ideal for applications requiring rotational control, the FLEX Ex counter is essentially a tachometer with the capability of reporting frequency, acceleration, and direction. Outputs are activated by alarms. Input devices range from magnetic pickup to flowmeters, to incremental encoders to proximity detectors.

This intelligent I/O module is designed to perform high-speed frequency algorithms. The module provides two frequency inputs, two gate inputs, and two outputs. The frequency inputs are capable of accepting frequencies up to 32 kHz. The module accepts and returns binary data.

The counter measures frequency over a user-specified time interval. A frequency calculation can start before the time interval clock is synchronized with the frequency input to count over a user-selected sampling time or a user-defined number of frequency input pulses. All power for input devices (24V DC) is supplied by the module.

### 1797-IJ2 2 Input Frequency Counter Module

- Software configurable frequency operating mode, with independent selections per frequency input
- Frequency inputs, two gate inputs, and two outputs
- Functional data: four selectable ranges: 50 mV; 500 mV (magnetic pickup); flowmeter; and NAMUR
- Provides IS power to drive up to two NAMUR and two flowmeter frequency inputs and/or contact switches and NAMUR gate inputs
- NAMUR lead breakage indication for any lead, signal to the backplane and LED (per channel) blinking red for fault
- NAMUR lead breakage defeat on per channel basis via module data table (NAMUR inputs only)
- Frequency count range up to 32 kHz

- Calculate frequency on time interval or input count
- Programmable scaling
- Acceleration value calculated
- Maximum frequency or acceleration alarms
- All channels updated to the backplane every ≤ 4 ms (according to sampling time)

**Schematic Diagram for the 1797-IJ2 Module**

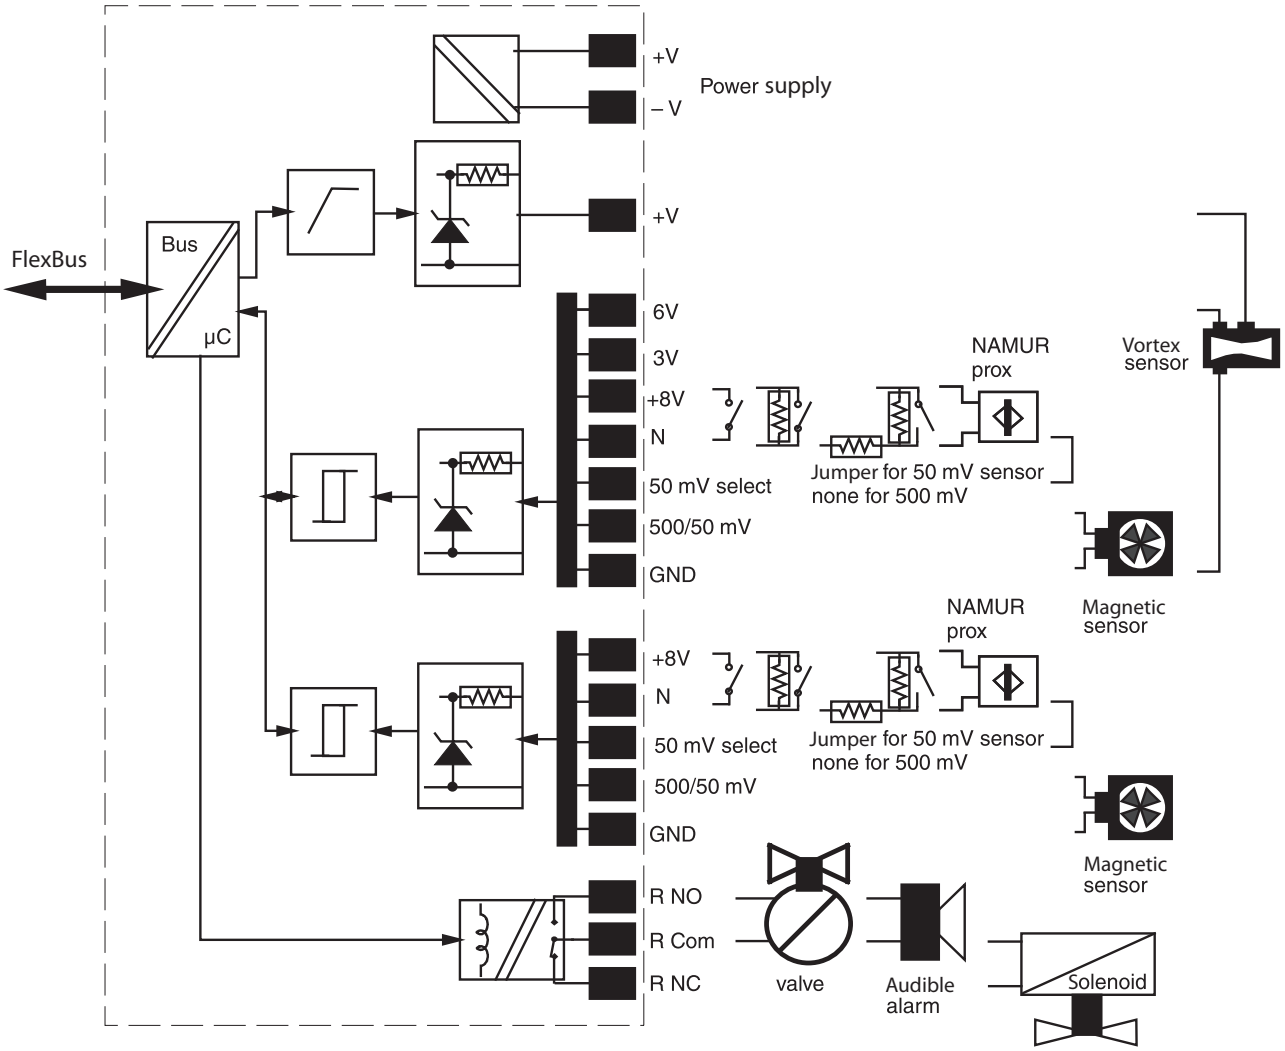


**2 Input Frequency Counter Module**

| Specification | 1797-IJ2 |
|---|---|
| Number of inputs | 2 |
| Flowmeter input signal threshold | 3V or 6V, selectable |
| Flowmeter input voltage available | < 15V @ 20 mA |
| Magnetic pickup input signal | 50 mV or 500 mV, selectable |
| Processing time | ≤ 4 ms |

### 2 Input Frequency Counter Module

| Specification | 1797-IJ2 |
|---|---|
| Input frequency range | 1.0…32,767 Hz |
| Frequency resolution, min | Sampling Time – Accuracy<br>2 ms – 0.043%<br>4 ms – 0.033%<br>5 ms – 0.031%<br>10 ms – 0.027%<br>20 ms – 0.025%<br>50 ms – 0.023%<br>100 ms – 0.023%<br>200 ms – 0.023%<br>500 ms – 0.023%<br>1000 ms – 0.023% |
| Frequency input, characteristics | Magnetic pickup: 50 mV, 500 mV<br>NAMUR: 8V, 8 mA<br>Flowmeter: low ≥ 3V; high ≥ 6V |
| Impedance, frequency input | > 5 kΩ magnetic pickup<br>> 10 kΩ flowmeter |
| Number of outputs | 2 |
| FLEX Ex power consumption | 4.25 W |
| Power dissipation, max | 4.25 W |
| Thermal dissipation, max | 14.5 BTU/hr |
| Instrinsically safe input characteristics | EN 60947-5-6 (NAMUR) |
| Noxious gas exposure | Tested to severity level G3, ISA-S71.04-1985 |
| Dimensions (H x W x D) | 46 x 94 x 75 mm (1.8 x 3.7 x 2.95 in.)<br>94 x 94 x 91 mm (3.7 x 3.7 x 3.6 in.) installed |

## Notes:

# Select a FLEX Ex I/O Terminal Base Unit

## Step 3 – Select:

*the appropriate terminal base unit for your module and system*

Each FLEX Ex I/O module requires a FLEX Ex I/O terminal base unit that snaps onto the DIN rail to the right of the I/O adapter. The terminal bases provide terminal connection points for the I/O wiring and plug together to form the backplane. They are available with screw, clamp, or spring terminations.

The following table is a comparison of general specifications for each FLEX Ex I/O terminal base unit. For compatibility with FLEX Ex I/O modules, see Table Digital I/O Module Summary on page 89 and Table Analog I/O Module Summary on page 93.

## Terminal Base Wiring Diagrams

### 1797-TB3 and 1797-TB3S

*Wiring when total module current draw is less than 8.5 W*

**Daisy-chaining Using Adapter Power Supply**

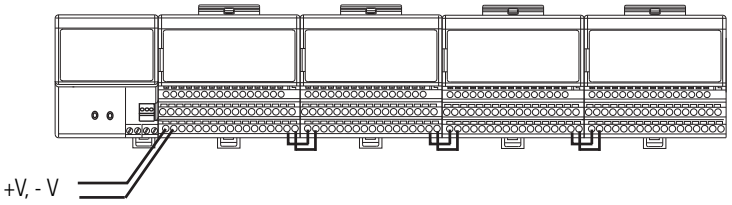


Use this method when the total module power draw is less that 8.5 W. Otherwise, power is connected to individual modules.

*Wiring when total module current draw is greater than 8.5 W*

**Combination Daisy-chaining and Separate Power Supplies**.

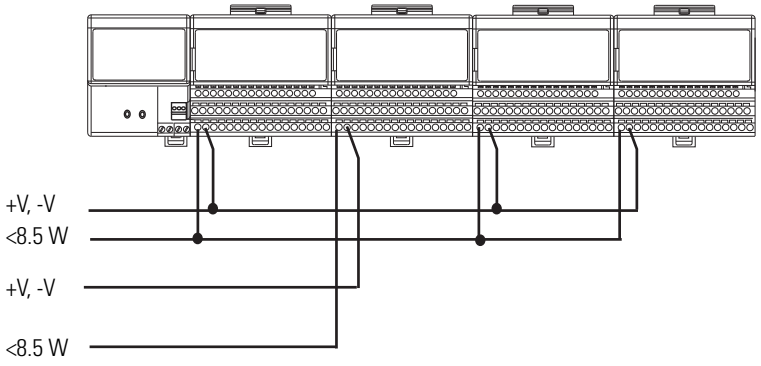


Separate power supply can be brought in on the last module in the chain if necessary. Make sure you do not jumper to the adapter if using this method.

Use this method when the total current draw through terminal base units is greater than 8.5 W.

# Select a FLEX Ex I/O Power Supply

## Step 4 – Select:

*if power consumption exceeds the maximum for a single power supply, install additional power supplies*

The power supply is an essential component in the operation of an intrinsically safe system. It must isolate the unsafe incoming power from the control system and limit the available energy to IS-safe levels.

FLEX Ex I/O power supplies provide power for the FLEX Ex ControlNet network, communication adapter, I/O modules, fiber hub, and IS field devices. No other power sources are needed to operate any components attached to the FLEX Ex system in the hazardous area. Power for valves, actuators, or transmitters come from the FLEX Ex modules.

FLEX Ex I/O power supply modules must be used to supply power to FLEX Ex I/O modules. Other power supplies are not allowed in order to meet the certification of the system. Power for valves, actuators, and transmitters come from the FLEX Ex modules.

There are two types of enclosures: (N-Type) explosion-proof with 1 inch conduit pipe thread input/output terminations that are certified in North America and (E-Type) flame-proof with increased safety input/output terminations that are certified to European standards. Each type is available in 24V DC or 85...253V AC for supply sources.

The 24V DC power supply includes dual power feeds for sour input redundancy whereas the AC power supplies support daisy chaining.

Common features include:

- four channels, 8.5 W output each channel
- outputs are IS galvanically isolated from the source
- all channels are independently IS limited

**General Specification Comparison**

| Catalog | Description | Input Voltage, max | Output Power (W) | Dimensions (HxWxD), approx | Weight approx |
|---|---|---|---|---|---|
| 1797-PS1N | FLEX Ex 85…250V AC Power Supply | 250V AC | 34 W(1) | 174 x 174 x 140 mm (6.9 x 6.9 x 5.51 in.) | 6 kg (13.2 lbs) |
| 1797-PS1E | FLEX Ex 24V DC Power Supply | 253V AC | | 260 x 174 x 140 mm (10.2 x 6.9 x 5.51 in.) | 6.9 kg (15.2 lbs) |
| 1797-PS2N2 | FLEX Ex conduit pipe North American-certified Power Supply | 32V DC max | | 174 x 174 x 140 mm (6.9 x 6.9 x 5.51 in.) | 6.1 kg (13.4 lbs) |
| 1797-PS2E2 | FLEX Ex flame-proof European-certified Power Supply | | | 260 x 174 x 140 mm (10.2 x 6.9 x 5.51in.) | 7 kg (15.4 lbs) |

(1) 8.5 W at each of 4 outputs.

## E Type Power Supply

1797-PS1E
or
1794-PS2E2

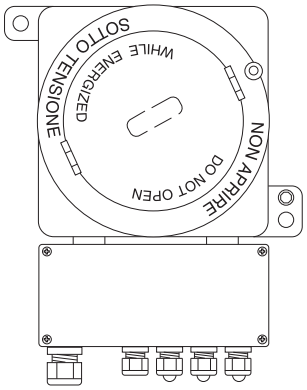


## N Type Power Supply

1797-PS1N
or
1797-PS2N2




## Understanding System Planning

Part of system planning is determining what modules are needed for the application, how many power supplies are needed, how to best partition the system, and where to locate the system cabinets.

A key task in the development cycle is determining the number of power supply outputs (thus power supplies) you will need.

Each power supply has four independent IS power outputs capable of 8.5W each. In this example, we required eleven IS power outputs so three power supplies were sufficient.

**Power Requirements**

| Modules | Requires |
|---|---|
| Fiber hub | 8.5 W |
| Two ControlNet adapters | 8.5 W each |
| Two analog inputs | 7.5 W each |
| Two analog outputs | 6.3 W each |
| Two thermocouple inputs | 1.6 W each |
| Two digital outputs | 7.5 W each |
| Three NAMUR digital inputs | 2.8 W each |
| Two counter inputs | 4.25 W each |

The total number of power supplies needed depends on the modules used and the total system configuration. The following illustration shows how this example may be configured.

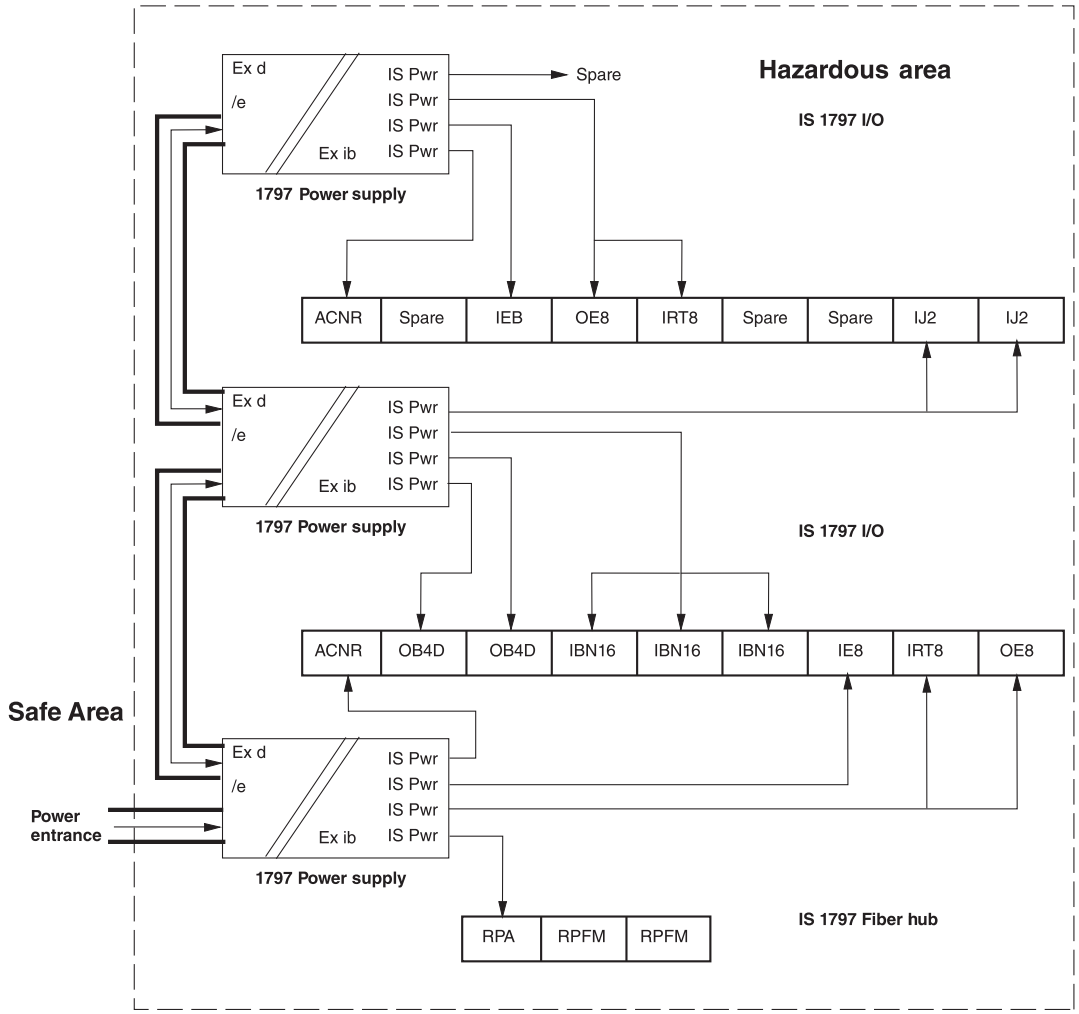

## Assigning Power Supplies

Note the amount of power each module requires and assign it to a power supply output. Continue to assign modules to the power supply output until the supply's output power rating is consumed.

Each power supply output in the FLEX Ex system is rated for 8.5 W. Modules can be attached to the output until their combined power equals that number. Do not exceed the power supply maximum of 8.5 W.

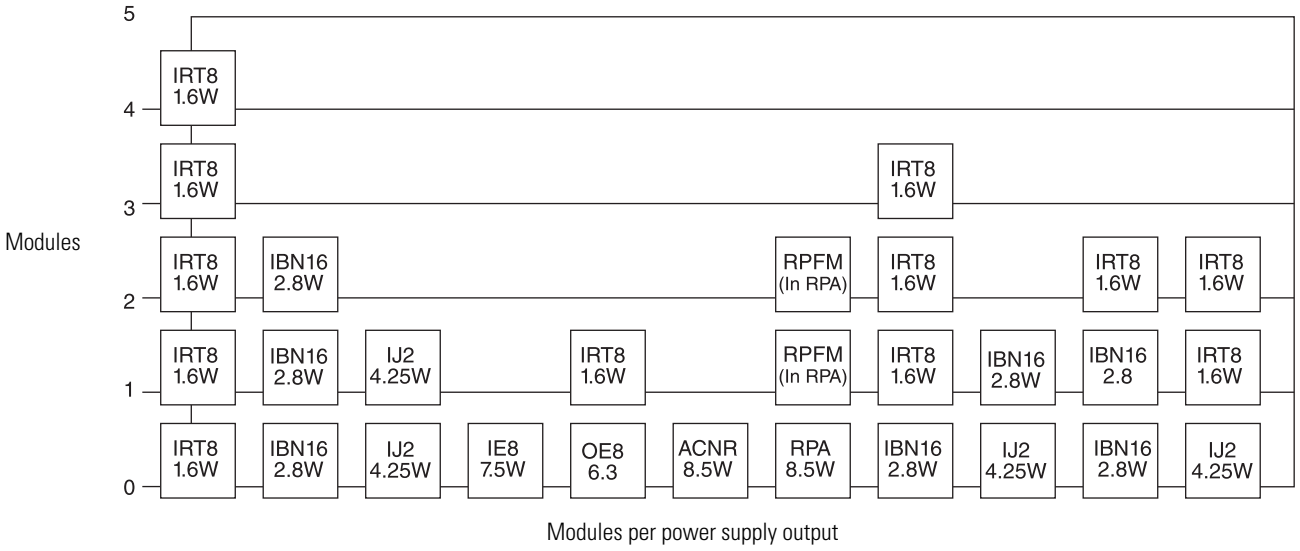

## Hazardous Area Installation

The following illustration provides an example of how power supplies are arranged within the FLEX Ex system when using fiber hubs.

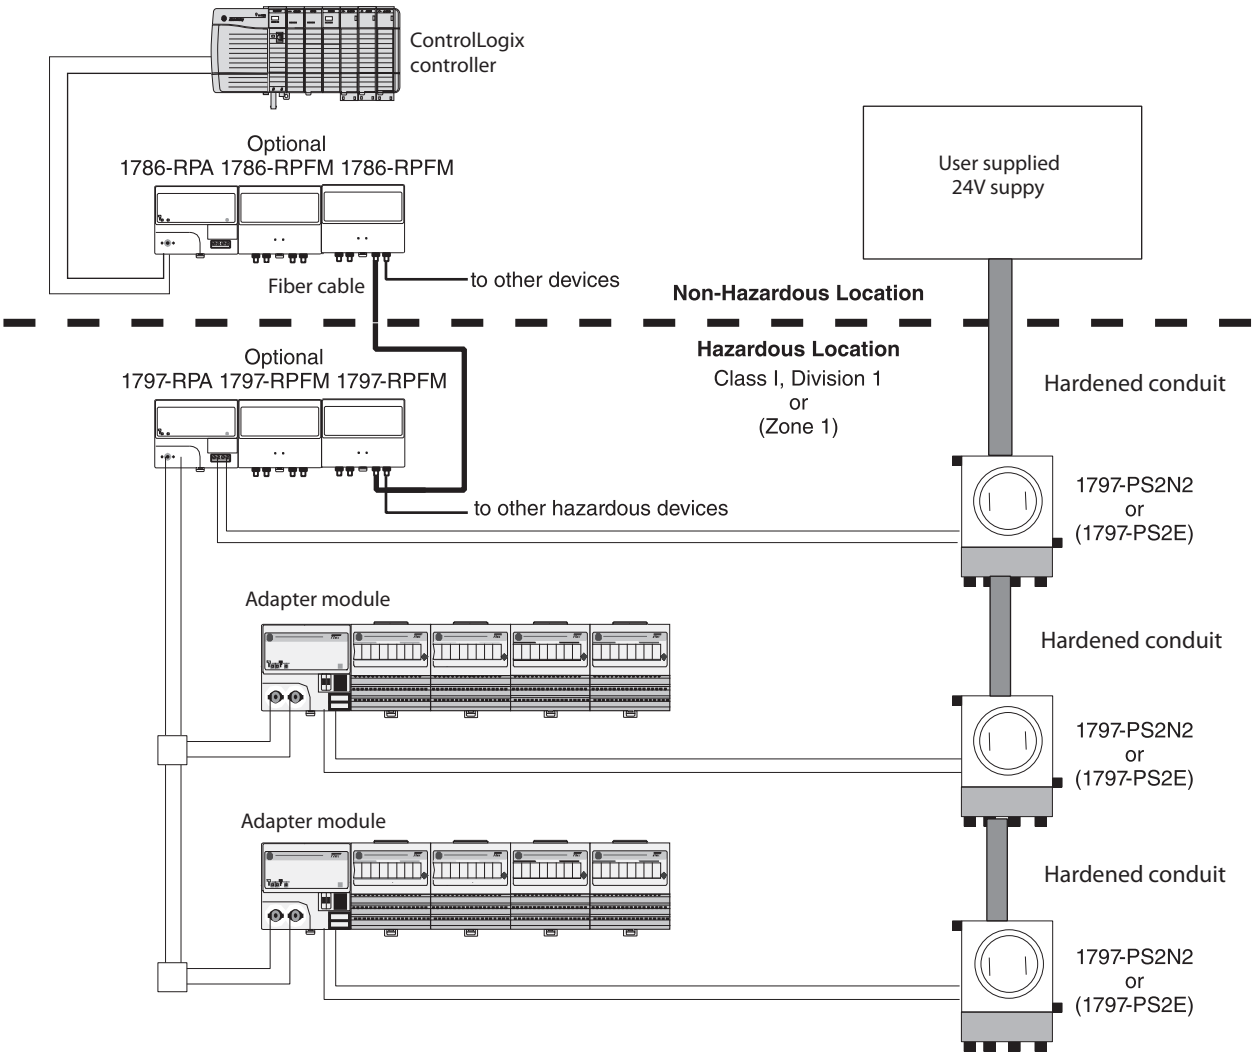

## 1797-PS1N and 1797-PS1E 85V…253V AC In/Quad-Ex DC Out

**Type of Power Input**

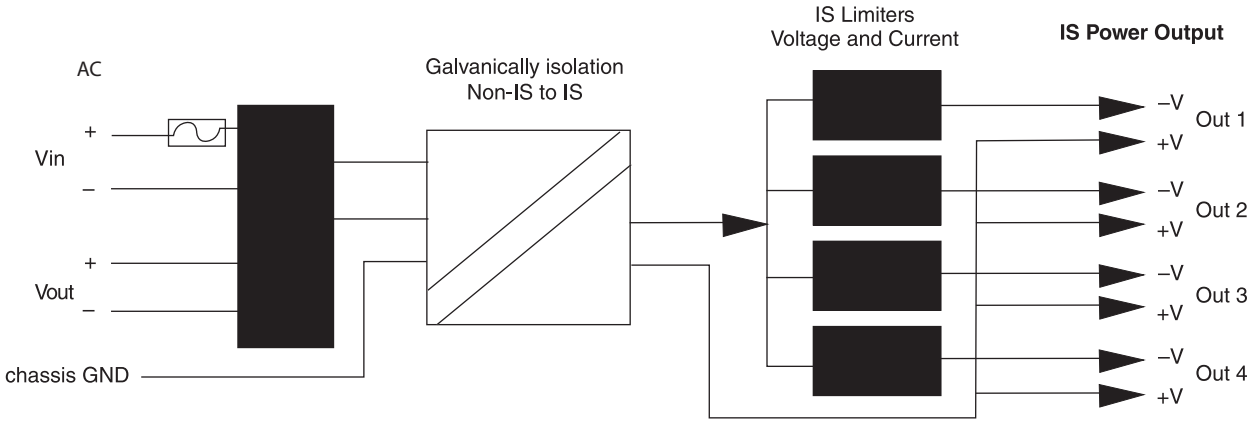


## 1797-PS2N2 and 1797-PS2E2 24V DC In/Quad-Ex DC Out

**Type of Power Input**

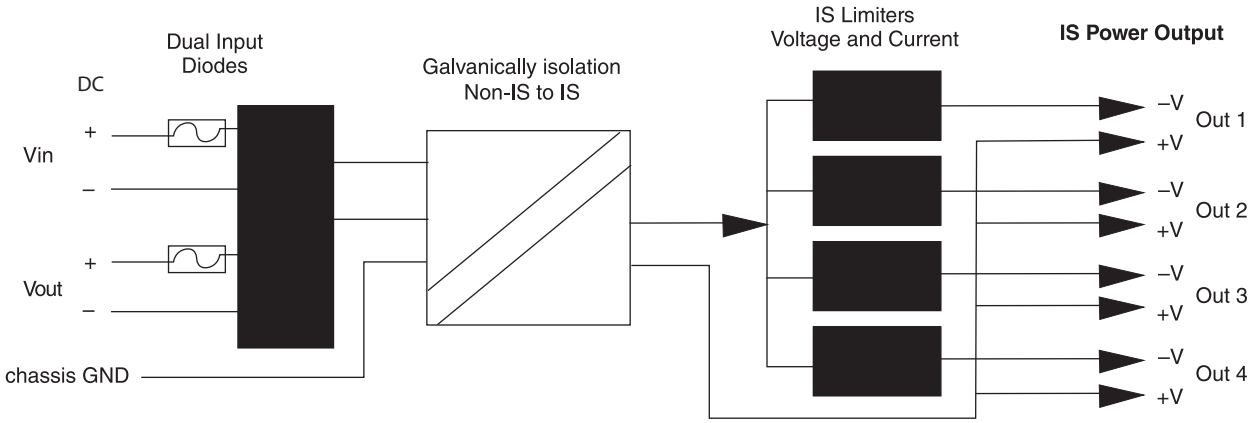


### General Specifications Summary

| Specification | 1797-PS1N | 1797-PS1E | 1797-PS2N2 | 1797-PS2E2 |
|---|---|---|---|---|
| Intrinsically safe module | Class I, Division 1, Groups A…D T4 (UL and C-UL)<br>Class II, Division 1 Groups E…G (UL and C-UL)<br>Class III (UL, FM and C-UL) | Zone1: II 2G Ex de [ib] IIC T4<br>Zone 22: II 3D Ex tD A22 IP54 T90°C X | Class I Division 1 Groups A…D T4 (UL, C-UL and FM)<br>Class II Division 1 Groups E…G (UL, FM, CUL) Class III | Zone1: II 2G Ex de [ib] IIC T4<br>Zone 22: II 3D Ex tD A22 IP54 T90°C X |
| Input connector terminals | Terminals 1, 2, 4, 5 | Terminals 1, 2, 4, 5 | Terminals 1, 2, 4, 5 | Terminals 1, 2, 4, 5 |
| Operating voltage range | 85…250V AC<br>120…250V DC | 85…253V AC | 18…32V DC | 18…32V DC |
| Current consumption | 0.9 A | 0.9 A | 3.1 A | 3.1 A |
| Ripple | — | | 5% AC | |

### General Specifications Summary

| Specification | 1797-PS1N | 1797-PS1E | 1797-PS2N2 | 1797-PS2E2 |
|---|---|---|---|---|
| Input power entry | 1 in NPT, ≤ 6 in conduit allowed between power supply and seal (UL, FM and C-UL) | Increased safety | 1 in NPT, 6 in conduit allowed between power supply and seal (UL and C-UL)<br>1 in NPT, 0 in conduit allowed between power supply and seal (FM) | Increased safety |
| Output connector terminals | Terminals 10…17 | | | |
| Power supply output power (W) | 34 W(1) | | | |
| Safe voltage, max $U_m$ | 250V AC | 253V AC | 40V DC | |
| Voltage $U_0$ | ≤ 9.5V | | | |
| Current $I_0$ | ≤ 1 A | | | |
| $C_0$ (IIC) | ≤ 500 nF | | | |
| $L_0$ (IIC) | ≤ 8µH | | | |
| Output cable resistance, max | ≤ 0.1 Ω (both directions) | | | |
| Power supply input power | 55 W | | | |
| Power dissipation | 21 W | | | |
| Thermal dissipation, max | 71.67 BTU/hr | | | |
| Dimensions (HxWxD), approx(2) | 174 x 174 x 140 mm<br>6.9 x 6.9 x 5.51 in | 260 x 174 x 140 mm<br>10.2 x 6.9 x 5.51 in | 174 x 174 x 140 mm<br>6.9 x 6.9 x 5.51 in | 260 x 174 x 140 mm<br>10.2 x 6.9 x 5.51 in |
| Weight, approx. (with packaging) | 6 kg (13.2 lbs) | 6.9 kg (15.2 lbs) | 6.1 kg (13.4 lbs) | 7 kg (15.4 lbs) |
| Protection class | IP 66/NEMA 7B | IP 65/NEMA 7B | IP 66/NEMA 7B | IP 65/NEMA 7B |

(1) 8.5 W at each of 4 outputs.

(2) Refer to individual installation instructions for mounting dimensions.

## Notes:

# Mount the FLEX System

## Step 6 – Select:

*•panel mount or DIN rail mount*

*•appropriate number of panels or DIN rails based on the number of modules and the physical requirements*

*•one end cap per controller system*

You can horizontally or vertically mount the FLEX I/O or FLEX Ex I/O system on a standard 35 mm DIN rail. The adapter and terminal base unit easily snap on the DIN rail by hand. Use a flat-blade screwdriver to remove components from the DIN rail.

Screw holes allow you to horizontally or vertically panel-mount your system in an enclosure. Maintain at least 25 mm (1 in.) of air space around your FLEX system.

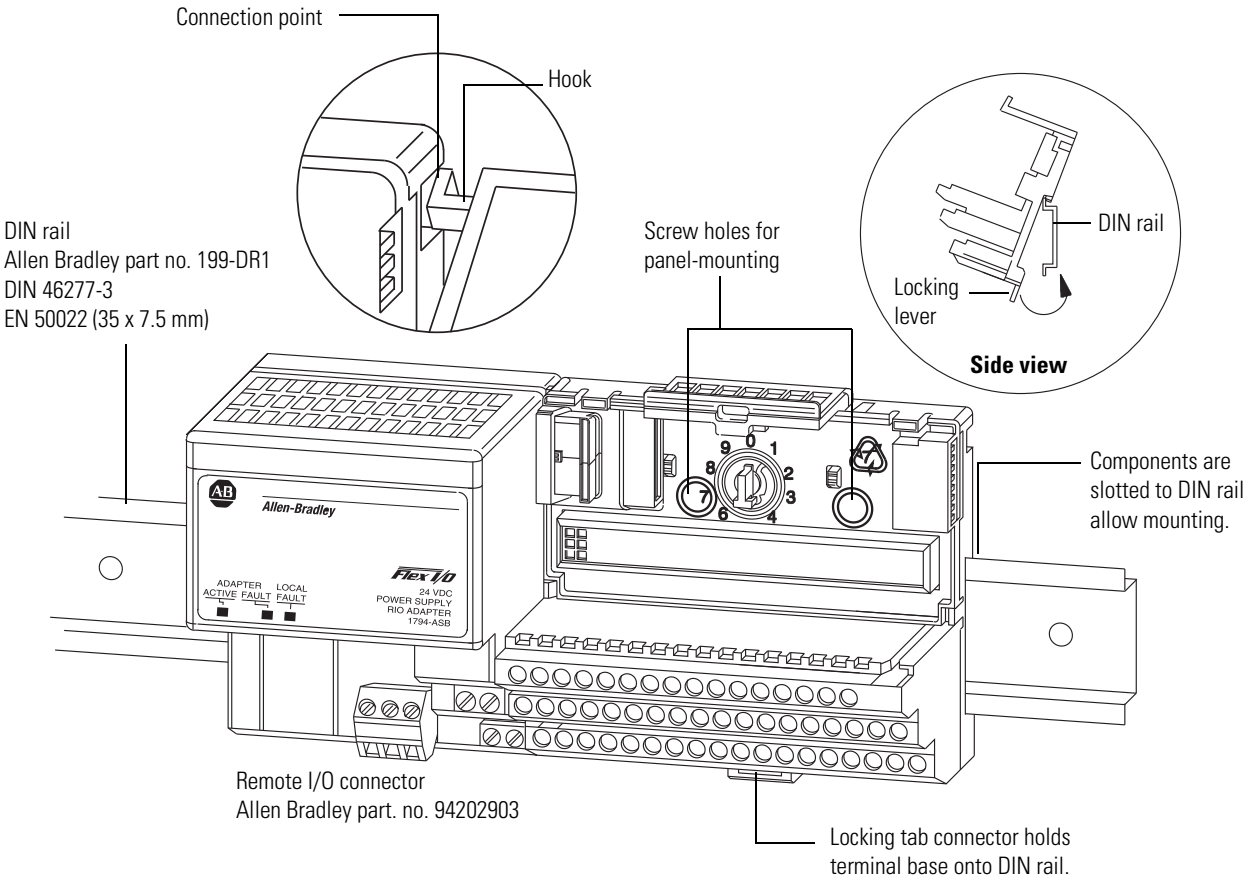

When properly installed, FLEX I/O and FLEX Ex I/O are grounded through the DIN rail to chassis ground. Use a zinc-plated, yellow-chromated steel DIN rail to assure proper grounding. Using other DIN rail materials, for example, aluminum or plastic, which can corrode, oxidize, or are poor conductors can result in improper or intermittent platform grounding.

If installing FLEX on non-recommended DIN rail materials, use the mounting holes provided with each terminal base, or use a 1794-NM1 mounting kit with an approved mounting bracket. Use mounting screws with star washers to provide the FLEX platform with a chassis ground connection that is not likely to be affected by shock, vibration, or oxidation over time.

The hook (on the terminal base unit) and adjacent connection point (on the communication adapter) keep the terminal base units tight together. These components are capable of maintaining a reliable connection in case of shock and/or vibration. Refer to the environmental specifications section for each module.

# Select Optional Accessories

## Step 5 – Select:

*optional accessories for FLEX I/O and FLEX I/O XT modules*

### 1794-CE1 and 1794-CE3 Extender Cables

Use one optional 1794-CE1 – 0.3 m (1 ft) or 1794-CE3 – 0.9 m (3 ft) extender cable, per system, to arrange your system in two rows or split your system into horizontal and vertical orientation. The cable can be used between any module or between adapters and modules.

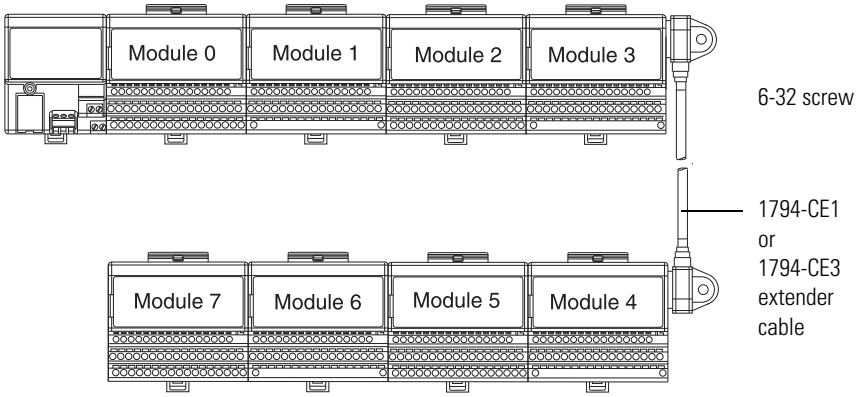


### 1794-NM1 FLEX I/O Mounting Kit

Use the optional 1794-NM1 FLEX I/O mounting kit to mount your FLEX I/O system on a panel without a DIN Rail.

1794-NM1 mounting kit with 18 screws (2 screws for the adapter and 2 screws for each module)

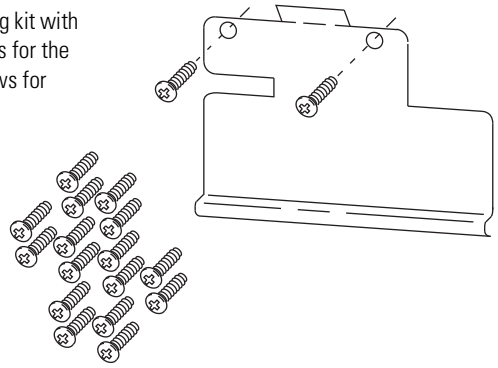

## 1492-EA35 DIN Rail Locks

When you use FLEX I/O modules in a high-vibration installation, and particularly when mounting the modules vertically, we recommend using DIN-rail locks (Allen-Bradley part number 1492-EA35).

## 1794-LBL FLEX I/O Label Kit

Use the label kit to tailor the label on your FLEX I/O terminal base unit to meet your needs. The label kit includes a diecut drawing and label sheet with five labels.

## 1794-N2 FLEX I/O Dummy Filler Module

This module is used to fill in an otherwise empty slot: a terminal base with no I/O module. It contains no electronics.

## 1794-CJC2

This Cold Junction Compensation kit contains two replacements for the CJCs supplied with 1794-IT8 and 1794-IRT8 modules.

## Step 5 – Select:

*optional accessories for FLEX Ex I/O modules*

### 1797-BOOT ControlNet BNC Boot

Use the ControlNet BNC boot, trunk isolator, and marking kit in your cable connections.

The 1797-BOOT covers the BNC connector on the ControNet Ex trunk cable. The kit contains 50 pieces.

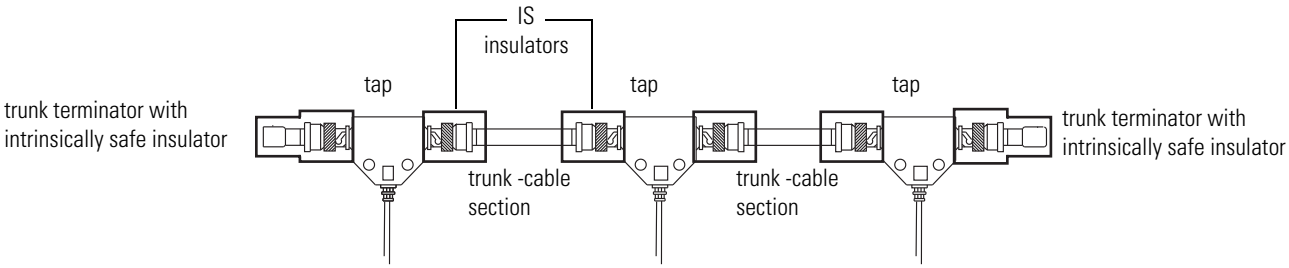


### 1797-INS Trunk Insulator and 1797-EXMK Marking Kit

The 1797-INS is a bag of 50 assorted insulators that you can use to replace those shipped with the product. The 1797-EXMK is a marking kit for FLEX Ex cable, containing 100 pieces.

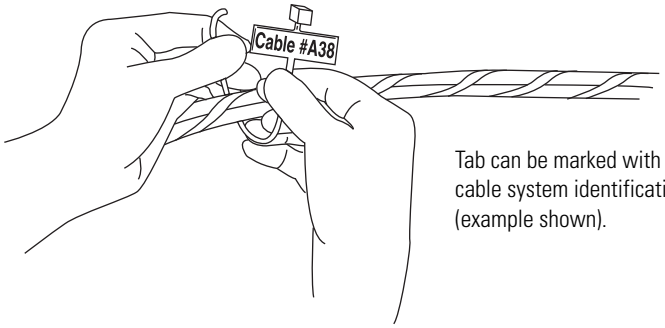


Tab can be marked with cable system identification (example shown).

## ControlNet Ex Taps

### 1797-TPS ControlNet Ex Straight T-Tap



### 1797-TPR ControlNet Ex Right-Angle T-Tap



### 1797-TPYS ControlNet Ex Straight Y-Tap



### 1797-TPYR ControlNet Ex Right-Angle Y-Tap



#### 1797-XT ControlNet Ex 75Ω Terminator

The terminator is sold in lots of 50.



#### 1797-TCAP ControlNet Tap Terminator

This kit contains five pieces.



#### 1786-RG6 Coax Trunk Cable

The 1786-RG6 Coax Trunk Cable can be used in Flex Ex applications in hazardous areas.

## Notes:

# Related Documentation

## FLEX I/O and FLEX I/O XT

Additional user documentation presents information according to the tasks you perform and the programming environment you use. Refer to the table for information on 1794 FLEX I/O, FLEX I/O XT publications.

**1794 FLEX I/O and FLEX IO XT Related Publications**

| | Catalog Number | Description | Installation Instructions | User Manual |
|---|---|---|---|---|
| Adapters | 1794-AENT | FLEX I/O EtherNet/IP Adapter Module Installation Instructions | 1794-IN082 | — |
| | 1794-AENTR | FLEX I/O Dual Port EtherNet/IP Adapter Module Installation Instructions | 1794-IN131 | 1794-UM066 |
| | 1794-AENTRXT | | | |
| | 1794-ACN15 | ControlNet Adapter Module Installation Instructions | 1794-IN101 | — |
| | 1794-ACNR15 | | | |
| | 1794-ACNR15XT | FLEX I/O ControlNet Adapter Modules Installation Instructions | 1794-IN128 | |
| | 1794-ADN | FLEX I/O DeviceNet Adapter Module Installation Instructions | 1794-IN099 | |
| | 1794-ADNK | FLEX I/O DeviceNet Adapter Module Installation Instructions | | |
| | 1794-ASB2 | Remote I/O Adapter Modules Installation Instructions | 1794-IN098 | |
| | 1794-ASB2K | | | |
| | 1794-ASB | | | 1794-UM009 |
| Bases | 1794-TB3 | FLEX I/O D-Shell Terminal Base Units Installation Instructions | 1794-IN092 | — |
| | 1794-TB3K | | | |
| | 1794-TB3S | | | |
| | 1794-TB32 | | | |
| | 1794-TB32S | | | |
| | 1794-TB3T | | | |
| | 1794-TB3TS | | | |
| | 1794-TB3TSK | | | |
| | 1794-TB3G | | | |
| | 1794-TB3GK | | | |
| | 1794-TB3GS | | | |
| | 1794-TB3GSK | | | |
| | 1794-TBN | | | |
| | 1794-TBNK | | | |
| | 1794-TBNF | | | |

### 1794 FLEX I/O and FLEX IO XT Related Publications

| | Catalog Number | Description | Installation Instructions | User Manual |
|---|---|---|---|---|
| Bases | 1794-TBNFK | FLEX I/O D-Shell Terminal Base Units Installation Instructions | 1794-IN107 | — |
| | 1794-TB62DS | | | |
| | 1794-TB37DS | | | |
| | 1794-TB62EXD4X15 | | | |
| | 1794-TB37EXD4CM8 | | | |
| | 1794-TB37EXD4VM8 | | | |
| | 1203-FB1 | Installation 1203-FB1 FLEX I/O SCANport Base | — | 1203-UM000 |
| AC | 1794-IA8 | FLEX I/O AC Input Modules Installation Instructions | 1794-IN102 | — |
| | 1794-IA8I | | | |
| | 1794-IA16 | | | |
| | 1794-IM8 | FLEX I/O 220V AC Input and Output Modules Installation Instructions | 1794-IN104 | |
| | 1794-IM16 | FLEX I/O 240V AC Input and Output Modules Installation Instructions | 1794-IN123 | |
| | 1794-OA8 | FLEX I/O Digital AC Output Modules Installation Instructions | 1794-IN103 | |
| | 1794-OA8I | | | |
| | 1794-OA16 | | | |
| | 1794-OM8 | FLEX I/O 220V AC Input and Output Modules Installation Instructions | 1794-IN104 | |
| | 1794-OM16 | FLEX I/O 240V AC Input and Output Modules Installation Instructions | 1794-IN123 | |
| DC | 1794-IB8 | FLEX I/O Digital Input Modules Installation Instructions | 1794-IN093 | |
| | 1794-IB16 | | | |
| | 1794-IB16D | FLEX I/O 16 Input and 16 Output w/Diagnostics Module Installation Instructions | 1794-IN096 | 1794-UM061 |
| | 1794-IB16XT | FLEX XT I/O Digital DC Input/Output Modules Installation Instructions | 1794-IN124 | — |
| | 1794-IB10XOB6 | FLEX I/O Input/ Output Module Installation Instructions | 1794-IN083 | |
| | 1794-IB10XOB6XT | FLEX XT I/O Digital DC Input/Output Modules Installation Instructions | 1794-IN124 | |
| | 1794-IB16XOB16P | FLEX I/O Input/ Output Module Installation Instructions | 1794-IN083 | |
| | 1794-IC16 | FLEX I/O 48V DC Input and Output Modules Installation Instructions | 1794-IN105 | |
| | 1794-IG16 | FLEX I/O 5V DC TTL Digital Input and Output Modules Installation Instructions | 1794-IN119 | |
| | 1794-IH16 | FLEX I/O 125V DC Digital Input Module Installation Instructions | 1794-IN118 | |

### 1794 FLEX I/O and FLEX IO XT Related Publications

| | Catalog Number | Description | Installation Instructions | User Manual |
|---|---|---|---|---|
| DC | 1794-IV16 | FLEX I/O Digital DC Sourcing Input and Sinking Output Modules Installation Instructions | 1794-IN095 | — |
| | 1794-IB32 | FLEX I/O Digital Input Modules Installation Instructions | 1794-IN093 | |
| | 1794-IV32 | FLEX I/O Digital Sourcing Input and Sinking Output Modules Installation Instructions | 1794-IN122 | |
| | 1794-OB8 | FLEX I/O Digital DC Sourcing Output Modules Installation Instructions | 1794-IN094 | |
| | 1794-OB8EP | | | |
| | 1794-OB8EPXT | FLEX XT I/O Digital DC Input/Output Modules Installation Instructions | 1794-IN124 | |
| | 1794-OB16 | FLEX I/O Digital DC Sourcing Output Modules Installation Instructions | 1794-IN094 | |
| | 1794-OB16P | | | |
| | 1794-OB16D | FLEX I/O 16 Input and 16 Output w/Diagnostics Module Installation Instructions | 1794-IN096 | 1794-UM061 |
| | 1794-OB16PXT | FLEX XT I/O Digital DC Input/Output Modules Installation Instructions | 1794-IN124 | — |
| | 1794-OB32P | FLEX I/O Digital DC Sourcing Output Modules Installation Instructions | 1794-IN094 | |
| | 1794-OC16 | FLEX I/O 48V DC Input and Output Modules Installation Instructions | 1794-IN105 | |
| | 1794-OG16 | FLEX I/O 5V DC TTL Digital Input and Output Modules Installation Instructions | 1794-IN119 | |
| | 1794-OV16 | FLEX I/O Digital DC Sourcing Input and Sinking Output Modules Installation Instructions | 1794-IN095 | — |
| | 1794-OV16P | | | |
| | 1794-OV32 | FLEX I/O Digital Sourcing Input and Sinking Output Modules Installation Instructions | 1794-IN122 | |
| Relay | 1794-OW8 | FLEX I/O 8 Output Relay Module Installation Instructions | 1794-IN019 | |
| | 1794-OW8XT | | | |
| Analog | 1794-IE8 | FLEX I/O Input, Output and Input/Output Analog Modules Installation Instructions | 1794-IN100 | 1794-UM002 |
| | 1794-IE8XT | FLEX XT I/O Input, Output and Input/Output Analog Modules Installation Instructions | 1794-IN125 | — |
| | 1794-IE12 | FLEX I/O 12 Channel Analog Modules Installation Instructions | 1794-IN106 | |
| | 1794-IE8H | FLEX I/O 8 Input Hart Analog Module Installation Instructions | 1794-IN108 | 1794-UM063 |
| | 1794-OE4 | FLEX I/O Input, Output and Input/Output Analog Modules Installation Instructions | 1794-IN100 | 1794-UM002 |
| | 1794-OE4XT | FLEX XT I/O Input, Output and Input/Output Analog Modules Installation Instructions | 1794-IN125 | |
| | 1794-OE8H | FLEX I/O 8 Input Hart Analog Module Installation Instructions | 1794-IN108 | 1794-UM063 |

### 1794 FLEX I/O and FLEX IO XT Related Publications

| | Catalog Number | Description | Installation Instructions | User Manual |
|---|---|---|---|---|
| Analog | 1794-OE12 | FLEX I/O 12 Channel Analog Modules Installation Instructions | 1794-IN106 | — |
| | 1794-IE4XOE2 | FLEX I/O Input, Output and Input/Output Analog Modules Installation Instructions | 1794-IN100 | 1794-UM002 |
| | 1794-IE4XOE2XT | FLEX XT I/O Input, Output and Input/Output Analog Modules Installation Instructions | 1794-IN125 | — |
| | 1794-IE8XOE4 | FLEX I/O 12 Channel Analog Modules Installation Instructions | 1794-IN106 | |
| Isolated Analog | 1794-IF4I | FLEX I/O 4 Isolated Input Module Installation Instructions | 1794-IN038 | 1794-UM008 |
| | 1794-IF4IXT | FLEX XT I/O Isolated Input Analog Module Installation Instructions | 1794-IN129 | |
| | 1794-IF8IH | FLEX I/O 8 Isolated Input HART Analog Module Installation Instructions | 1794-IN115 | 1794-UM065 |
| | 1794-OF4I | FLEX I/O Isolated Analog Output Module Installation | 1794-IN037 | 1794-UM008 |
| | 1794-OF4IXT | FLEX XT I/O Isolated Input Analog Module Installation Instructions | 1794-IN129 | |
| | 1794-OF8IH | FLEX I/0 8 Isolated Output Analog Module Installation Instructions | 1794-IN120 | 1794-UM065 |
| | 1794-IF2XOF2I | FLEX I/O 2 In/2 Out Isolated Analog Combo Module Installation Instructions | 1794-IN039 | 1794-UM008 |
| Isolated Analog | 1794-IF2XOF2IXT | FLEX XT I/O Isolated Input Analog Module Installation Instructions | 1794-IN129 | |
| Specialty | 1794-IR8 | FLEX I/O 8 Thermocouple Input Module Installation Instructions | 1794-IN021 | 1794-UM004 |
| | 1794-IRT8 | TC/MV/RTD Input Module Installation Instructions | 1794-IN050 | 1794-UM012 |
| | 1794-IRT8XT | | | |
| | 1794-IT8 | FLEX I/O 8 Thermocouple Input Module Installation Instructions | 1794-IN021 | |
| Counters | 1794-IJ2 | 2 Input Frequency Module Installation Instructions | 1794-IN049 | 1794-UM011 |
| | 1794-IJ2XT | | | |
| | 1794-VHSC | FLEX I/O Very High Speed Counter Module Installation Instructions | 1794-IN067 | 1794-UM010 |
| | 1794-ID2 | 24V FLEX I/O 2 CHANNEL Incremental Encoder Module Installation Instructions | 1794-IN063 | 1794-UM015 |
| | 1794-IP4 | 24V DC FLEX I/O 4 Channel Installation Instructions | 1794-IN064 | 1794-UM016 |
| Power Supply | 1794-PS3 | FLEX I/O Power Supply Module Installation Instructions | 1794-IN069 | — |
| | 1794-PS13 | | | |
| Accessories | 1794-CE1 | FLEX I/O 1 ft Extender Cable | 1794-5.12 | |
| | 1794-CE3 | FLEX I/O 3 ft Extender Cable | | |

## FLEX Ex I/O

Additional user documentation presents information according to the tasks you perform and the programming environment you use. Refer to the table for information on 1794 FLEX Ex I/O publications.

**1797 FLEX Ex I/O Related Publications**

| | Catalog Number | Description | Publication |
|---|---|---|---|
| Communication | 1797-ACNR15 | ControlNet Ex Redundant Media Adapter Installation Instructions | 1797-IN014 |
| | 1797-RPA | ControlNet Ex Modular Repeater Adapter Fiber Repeater Module Installation Instructions | 1797-IN015 |
| | 1797-RPFM | | |
| Intermixed | 1797-BIC | FLEX Ex Bus Isolator and FlexBus Connector Installation Instructions | 1797-IN513 |
| | 1797-CEC | | |
| | 1797-BCNR | FLEX Ex Redundant ControlNet Barrier Module Installation Instructions | 1797-IN535 |
| Bases | 1797-TB3 | FLEX Ex Terminal Base Installation Instructions | 1794-IN001 |
| | 1797-TB3S | | |
| Digital | 1797-IBN16 | FLEX Ex NAMUR Input Module Installation Instructions | 1797-IN007 |
| | 1797-OB4D | FLEX Ex 24V DC Nonisolated Source 4 Output Module Installation Instructions | 1797-IN006 |
| Analog | 1797-IE8 | FLEX Ex Analog Modules User Manual | 1797-UM002 |
| | 1797-IE8H | FLEX Ex HART Analog Modules User Manual | 1797-UM005 |
| | 1797-IE8NF | FLEX Ex Analog Modules User Manual | 1797-UM002 |
| | 1797-IRT8 | FLEX Ex Thermocouple/RTD Module Installation Instructions | 1797-IN004 |
| | | FLEX Ex Thermocouple/RTD/mV Input Module User Manual | 1797-UM003 |
| Analog | 1797-OE8 | FLEX Ex Analog Modules User Manual | 1797-UM002 |
| | 1797-OE8H | FLEX Ex 8 Output Analog Modules Installation Instructions | 1797-IN003 |
| | | FLEX Ex HART Analog Modules User Manual | 1797-UM005 |
| Counter | 1797-IJ2 | FLEX Ex Frequency Input Module Installation Instructions | 1797-IN009 |
| Power supplies | 1797-PS1N | FLEX Ex 85-250V AC In/Quad-Ex DC Out Power Supply Installation Instructions | 1797-IN534 |
| | 1797-PS1E | FLEX Ex 85-253V AC In/Quad-Ex DC Out Power Supply Installation Instructions | 1797-IN533 |
| | 1797-PS2N2 | FLEX Ex Power Supply Installation Instructions | 1797-IN012 |
| | 1797-PS2E2 | FLEX Ex Power Supply Installation Instructions | 1797-IN535 |
| Accessories | 1797-EXMK | FLEX Ex Cable Marking Kit Installation Instructions | 1797-IN023 |
| | 1797-TCAP | ControlNet Tap Terminator Installation Instructions | 1797-IN030 |

## For More Information

If you would like a manual, you can:

- download a free electronic version from the Internet: http://www.rockwellautomation.com/literature/
- purchase a printed manual by contacting your local Allen-Bradley distributor or Rockwell Automation representative.

## Notes:

# Rockwell Automation Support

Rockwell Automation provides technical information on the Web to assist you in using its products.
At http://www.rockwellautomation.com/support/, you can find technical manuals, a knowledge base of FAQs, technical and application notes, sample code and links to software service packs, and a MySupport feature that you can customize to make the best use of these tools.

For an additional level of technical phone support for installation, configuration, and troubleshooting, we offer TechConnect support programs. For more information, contact your local distributor or Rockwell Automation representative, or visit http://www.rockwellautomation.com/support/.

## Installation Assistance

If you experience a problem within the first 24 hours of installation, review the information that is contained in this manual. You can contact Customer Support for initial help in getting your product up and running.

| | |
|---|---|
| United States or Canada | 1.440.646.3434 |
| Outside United States or Canada | Use the Worldwide Locator at http://www.rockwellautomation.com/support/americas/phone_en.html, or contact your local Rockwell Automation representative. |

## New Product Satisfaction Return

Rockwell Automation tests all of its products to ensure that they are fully operational when shipped from the manufacturing facility. However, if your product is not functioning and needs to be returned, follow these procedures.

| | |
|---|---|
| United States | Contact your distributor. You must provide a Customer Support case number (call the phone number above to obtain one) to your distributor to complete the return process. |
| Outside United States | Please contact your local Rockwell Automation representative for the return procedure. |

# Documentation Feedback

Your comments will help us serve your documentation needs better. If you have any suggestions on how to improve this document, complete this form, publication RA-DU002, available at http://www.rockwellautomation.com/literature/.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

**www.rockwellautomation.com**

**Power, Control and Information Solutions Headquarters**

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444
Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640
Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 1794-SG002F-EN-P - January 2017
Supersedes Publication 1794-SG002E-EN-P - June 2015

Copyright © 2017 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.