

PowerFlex 4 and 40 AC Drives

Original Instructions



| Topic | Page |
|---|------|
| Product Overview | 2 |
| Reference Materials | 2 |
| Packaging and Mounting | 3 |
| Start Up, Programming and Operation | 3 |
| Optimized Performance | 4 |
| Sensorless Vector Performance | 4 |
| Sensorless Vector Control | 4 |
| Performance | 4 |
| I/O | 5 |
| Communications | 5 |
| Versatile Programming and Network Solutions | 6 |
| PC Programming Software | 6 |
| Catalog Number Explanation | 8 |
| Product Selection | 9 |
| User Installed Options | 10 |
| Installation Considerations | 14 |
| Control Wiring | 15 |
| Specifications | 19 |
| Parameter Descriptions | 22 |
| Product Dimensions | 25 |
| PowerFlex 4 and 40 Configured Drives | 32 |

LISTEN.
THINK.
SOLVE.[®]

Product Overview

Providing users with powerful motor speed control in a compact, space saving design, the Allen-Bradley® PowerFlex® 4 and 40 AC drives are the smallest and most cost-effective members of the PowerFlex® family of drives. Available in power ratings from 0.2 to 11 kW (0.25 to 15 HP) and in voltage classes of 120, 240, 480 and 600 volts, PowerFlex 4 and 40 are designed to meet global OEM and end-user demands for flexibility, space savings, ease of use and are cost-effective alternatives for speed control of applications such as machine tools, fans, pumps and conveyors and material handling systems



Reference Materials

For additional PowerFlex 4 and 40 data and general drive information, refer to the following publications:

| Title | Publication | Online |
|--|--------------|--|
| PowerFlex 4 User Manual | 22A-UM001 | www.rockwellautomation.com/literature |
| PowerFlex 40 User Manual | 22B-UM001 | |
| Wiring and Grounding Guidelines for PWM AC Drives | DRIVES-IN001 | |
| Preventive Maintenance of Industrial Control and Drive System Equipment | DRIVES-TD001 | |
| Safety Guidelines for the Application, Installation and Maintenance of Solid State Control | SGI-1.1 | |

For other information, contact Allen-Bradley Drives Technical Support:

| Title | Online |
|--|--|
| Allen-Bradley Drives Technical Support | www.ab.com/support/abdrives |

Shaded areas are applicable to PowerFlex 40 only.

Packaging and Mounting

- Installation can be a virtual snap using the **DIN rail mounting** feature on A and B frame drives. Panel mounting is also available, providing added flexibility.
- **Flange mount** drives are available to reduce overall enclosure size.
- **Zero Stacking™** is allowable for ambient temperatures up to 40 °C, saving valuable panel space. 50 °C ambient temperatures are permitted with minimal spacing between drives.
- **Integral filtering** is available on all 230V single phase ratings, providing a cost-effective means of meeting EN55011, Class A and B EMC requirements. External filters provide compliance to Class A and B requirements for all PowerFlex 4 and 40 ratings.
- An optional **IP30, NEMA/UL Type 1 conduit box** is easily adapted to the standard IP20 (NEMA Type Open) product, providing increased environmental ratings.
- **IP66, NEMA/UL Type 4X/12** (Indoor) for mounting directly in the product environment. Listed by UL to resist dust, dirt, etc. and survive high pressure water spray. Also certified by NSF to ensure conformity with international food equipment standards.



Start Up, Programming and Operation

- An **integral keypad** provides out of the box operation using the local potentiometer and control keys.
- The 10 most common application parameters are contained in the **Basic Program Group**, making programming fast and easy.
- The **programming keys** have the same function as all other PowerFlex drives, so if you can program one PowerFlex drive, you can program them all.
- A **4 digit display** with 10 additional LED indicators provides an intuitive display of drive status and information.
- Integral **RS-485 communications** can be used for programming from a PC. It can also be used in a multi-drop network configuration. A serial converter module provides connectivity to any controller with a DF1 port.
- A **NEMA/UL Type 4X** remote and **NEMA/UL Type 1 hand-held LCD keypad** provide additional programming and control flexibility, both featuring the popular CopyCat function.



Optimized Performance


- **Removable MOV** to ground provides trouble-free operation when used on ungrounded distribution systems.
- A **relay pre-charge** limits inrush current.
- **Integral brake transistor**, available on all ratings (except no brake version), provides dynamic braking capability with simple low cost brake resistors.
- DIP switch settable **24V DC sink or source control** for control wiring flexibility.
- 150% overload for 60 seconds or 200% overload for 3 seconds provides **robust overload protection**.
- **Adjustable PWM frequency up to 16 kHz** ensures quiet operation.



Sensorless Vector Performance

PowerFlex 4


- Drive automatically provides auto boost (IR compensation) and slip compensation.
- Provides excellent speed regulation and high levels of torque across the entire speed range of the drive, and improved speed regulation even as loading increases.

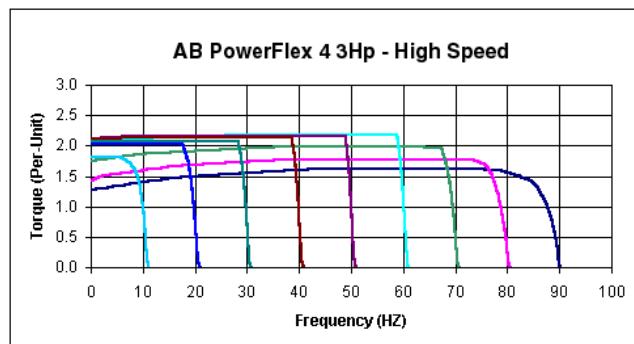

Sensorless Vector Control


PowerFlex 40

- Sensorless Vector Control provides exceptional speed regulation and very high levels of torque across the entire speed range of the drive.
- The Autotune feature allows the PowerFlex 40 to adapt to individual motor characteristics.

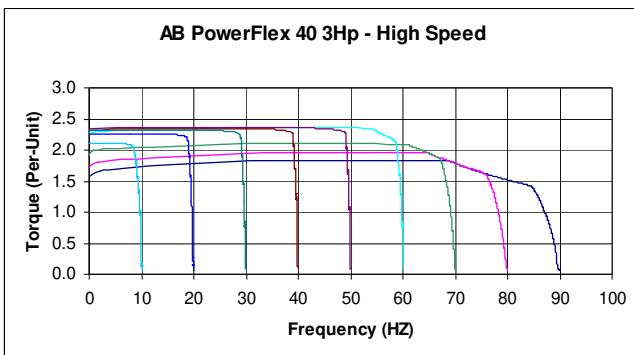

Performance

- This graph depicts the ability of a PowerFlex 40 drive to accelerate into at least 150% load. A PowerFlex 4 will perform similarly, but with a slightly higher acceleration time.
- At 100% motor load, the drive will run the motor at synchronous speed.
- Excellent current regulation.
- Linear acceleration.
- Best in class digital input response time and repeatability.

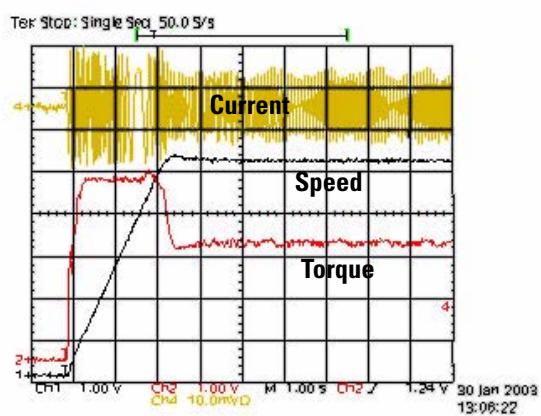


Performance

- **Sensorless Vector Control** develops high torque over a wide speed range and adapts to individual motor characteristics.
- **Variable PWM** allows the drive to output more current at low frequencies.
- Integral **PID** functionality enhances application flexibility.
- **Timer, Counter, Basic Logic and StepLogic™ functions** can reduce hardware design costs and simplify control schemes.
 - **Timer function:** Relay or opto outputs controlled by drive performing timer function. Timer is initiated by activating a digital input programmed as “Timer Start.”
 - **Counter function:** Relay or opto outputs controlled by drive performing counter function. Counter function is activated by a digital input programmed as “Counter Input.”
 - **Basic Logic:** Relay or opto outputs controlled by status of digital inputs programmed as “Logic Inputs.” Performs basic Boolean logic.
 - **StepLogic:** Logic-based steps using preset speed settings. Each step can be programmed for a specific speed, direction and accel/decel profile. Drive outputs can be used to indicate which step is being performed.



I/O

- **Two (2) Analog Inputs** (one unipolar and one bipolar) are independently isolated from the rest of the drive I/O. These inputs can be toggled between via a digital input.
- **Three (3) fixed and four (4) fully programmable Digital Inputs** provide application versatility.
- **One (1) Analog Output** is DIP switch selectable for either 0...10V or 0...20mA. This scalable, 10-bit output is suitable for metering or as a speed reference for another drive.
- **Two (2) Opto Outputs** and **one (1) form C relay output** can be used to indicate various drive, motor or logic conditions.

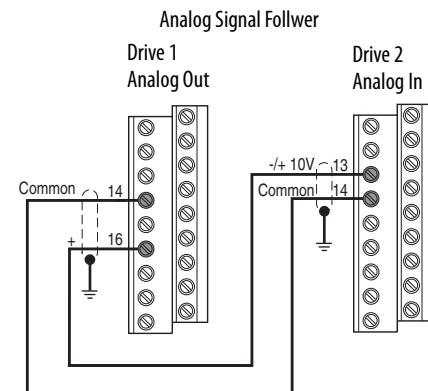


Communications

- Integral communication cards such as DeviceNet™, EtherNet/IP™, PROFIBUS™ DP, LonWorks® and, ControlNet™ can improve machine performance.
- The DSI Wireless Interface Module (WIM) provides a wireless communication interface between a Pocket PC, laptop computer or desktop computer equipped with Bluetooth® wireless technology, and any Allen-Bradley® product supporting the DSI™ protocol.
- Field installed option allows for future addition of stand-alone drives to a network.
- Online EDS file creation with RS NetWorx™ providing ease of set-up on a network.



Versatile Programming and Network Solutions

- PowerFlex 4 and PowerFlex 40 are compatible with any device that acts as a RTU Master and supports standard 03 and 06 RTU commands.
- A network can be configured using PowerFlex 40 drives with optional communication cards for high performance and flexible configuration capabilities.
 - BACnet
 - ControlNet
 - DeviceNet
 - EtherNet/IP
 - LonWorks
 - PROFIBUS DP
- A multi-drive solution can be reached using a single PowerFlex 40 DeviceNet option, with the ability for up to five drives to reside on one node.
- Integral RS485 communications enable the drives to be used in a multi-drop network configuration. A serial converter module (SCM) provides connectivity to any controller with a DF1 port. The SCM can be eliminated if the controller acts as a RTU Master.

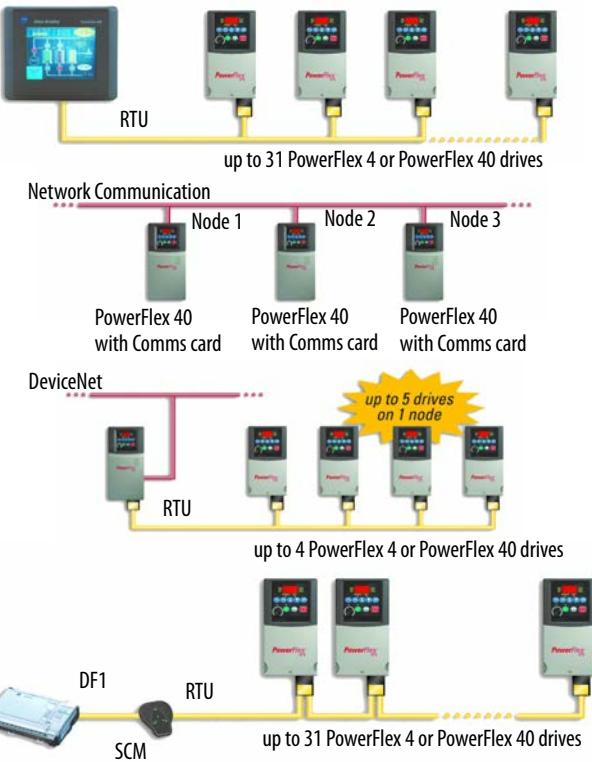


PC Programming Software

Through the use of a Serial Converter Module and DriveExplorer™ or DriveTools™ SP software, programming can be greatly simplified.

DriveExplorer Software

- View and modify drive and adapter parameters in a method similar to the file management capability of Microsoft Windows Explorer.
- Operate the drive via an on-screen Control Bar, which is a tool that allows you to start, stop, and change the speed reference of the drive.
- Save, restore and print parameter information.
- Compare current parameters with factory defaults or previously saved parameter values.
- Edit, upload and download parameters.

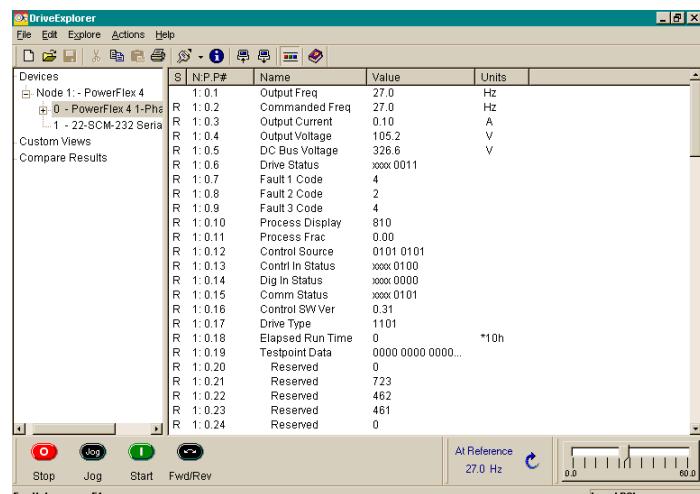

DriveTools SP Software

- Online and offline programming capability
- In-grid and dialog-based parameter editing
- Immediate visual indication of drive and communication status when viewing online drive
- Integrated HTML Help architecture

Use the chart below to assist in determining which product is most appropriate for an application.

| Feature | PowerFlex® 4 | PowerFlex® 40 |
|--|---|---|
| Catalog Reference | 22A | 22B |
| | (1.1) 1.5 HP/115V, 1Ø | (1.1) 1.5 HP/115V, 1Ø |
| | (2.2) 3 HP/230V, 1Ø | (2.2) 3 HP/230V, 1Ø |
| | (3.7) 5 HP/230V, 3Ø | (7.5) 10 HP/230V, 3Ø |
| | (3.7) 5 HP/460V, 3Ø | (11.0) 15 HP/460V, 3Ø |
| | | (11.0) 15 HP/600V, 3Ø |
| Maximum (kW)HP Rating/Input Voltage | 150% for 60 seconds 200% for 3 seconds | 150% for 60 seconds 200% for 3 seconds |
| Overload Capacity | ● | ● ● ⁽²⁾ |
| IP30, NEMA/UL Type 1 Option | | |
| IP66, NEMA/UL Type 4X/12 (Indoor) | | |
| EMC Filtering | Internal - 1Ø, 230V External - All 1Ø, 115V and 3Ø Ratings | Internal - 1Ø, 230V External - All 1Ø, 115V and 3Ø Ratings |
| DIN Rail Mounting Standard | ● | ● (Through 5 HP) |
| Integral Keypad with Speed Pot | ● | ● |
| Keypad - Remote LCD | ● | ● |
| Keypad CopyCat Function | ● | ● |
| Control Type | V/Hz | Sensorless Vector & V/Hz |
| Internal DB Transistor | ● Not available on no brake models. | ● |
| Preset Speeds | 4 | 8 |
| Carrier Frequency | 2...16 kHz | 2...16 kHz |
| Skip Frequency | | ● |
| Process Control Loop | | ● (PID) |
| StepLogic Functionality | | ● |
| Timer/Counter Functions | | ● |
| Control Voltage | 24V sink/source | 24V sink/source |
| | 3 fixed for START/STOP/REV | 3 fixed for START/STOP/REV |
| Discrete Inputs | 2 fully programmable | 4 fully programmable |
| Analog Input - Unipolar | 1 (0...10V or 4...20 mA) | 2 (0...10V and 4...20 mA) |
| Analog Input - Bipolar | | 1 (+/- 10V) ⁽³⁾ |
| Analog Response | 2 Hz (500 ms) | 100 Hz (10 ms) |
| Relay Output | 1 - N.O./N.C. dry contact | 1 - N.O./N.C. dry contact |
| Digital/Optocoupler Output | | 2 |
| Analog Output | | ● (0...10V or 4...20 mA) |
| Integral RS485 | ● | ● |
| RS232 (Requires use of Serial Converter Module) | ● | ● |
| BACnet | ● ⁽¹⁾ | ● |
| ControlNet | ● ⁽¹⁾ | ● |
| DeviceNet | ● ⁽¹⁾ | ● |
| EtherNet/IP | ● ⁽¹⁾ | ● |
| LonWorks | ● ⁽¹⁾ | ● |
| PROFIBUS DP | ● ⁽¹⁾ | ● |

(1) With 22-XCOMM-DC-BASE External mounting kit.

(2) Frame B only.

(3) When using bipolar input, the 0...10V unipolar input cannot be used.

Catalog Number Explanation

| 1-3 | 4 | 5 | 6-8 | 9 | 10 | 11 | 12 | 13-14 | | | | | | | | |
|-----------------------------|--|------------|------------|----------|----------|----------|----------|-----------|--|--|--|--|--|--|--|--|
| 22A | A | | 1P5 | N | 1 | 1 | 4 | AA | | | | | | | | |
| <i>a</i> | <i>b</i> | | <i>c</i> | <i>d</i> | <i>e</i> | <i>f</i> | <i>g</i> | <i>h</i> | | | | | | | | |
| <i>a</i> | | | | | | | | | | | | | | | | |
| Drive | | | | | | | | | | | | | | | | |
| Code | Type | | | | | | | | | | | | | | | |
| 22A | PowerFlex 4 | | | | | | | | | | | | | | | |
| 22B | PowerFlex 40 | | | | | | | | | | | | | | | |
| <i>b</i> | | | | | | | | | | | | | | | | |
| Voltage Rating | | | | | | | | | | | | | | | | |
| Code | Voltage | Ph. | | | | | | | | | | | | | | |
| V | 120V ac | 1 | | | | | | | | | | | | | | |
| A | 240V ac | 1 | | | | | | | | | | | | | | |
| B | 240V ac | 3 | | | | | | | | | | | | | | |
| D | 480V ac | 3 | | | | | | | | | | | | | | |
| E | 600V ac | 3 | | | | | | | | | | | | | | |
| <i>c1</i> | | | | | | | | | | | | | | | | |
| Rating | | | | | | | | | | | | | | | | |
| 100-120V Single-Phase Input | | | | | | | | | | | | | | | | |
| Code | Amps | kW (Hp) | | | | | | | | | | | | | | |
| 2P3 | 2.3 | 0.4 (0.5) | | | | | | | | | | | | | | |
| 5P0 | 5.0 | 0.75 (1.0) | | | | | | | | | | | | | | |
| 6P0 | 6.0 | 1.1 (1.5) | | | | | | | | | | | | | | |
| <i>c2</i> | | | | | | | | | | | | | | | | |
| Rating | | | | | | | | | | | | | | | | |
| 200-240V Single-Phase Input | | | | | | | | | | | | | | | | |
| Code | Amps | kW (Hp) | | | | | | | | | | | | | | |
| 2P3 | 2.3 | 0.4 (0.5) | | | | | | | | | | | | | | |
| 5P0 | 5.0 | 0.75 (1.0) | | | | | | | | | | | | | | |
| 8P0 | 8.0 | 1.5 (2.0) | | | | | | | | | | | | | | |
| 012 | 12 | 2.2 (3.0) | | | | | | | | | | | | | | |
| <i>c3</i> | | | | | | | | | | | | | | | | |
| Rating | | | | | | | | | | | | | | | | |
| 200-240V Three-Phase Input | | | | | | | | | | | | | | | | |
| Code | Amps | kW (Hp) | | | | | | | | | | | | | | |
| 2P3 | 2.3 | 0.4 (0.5) | | | | | | | | | | | | | | |
| 5P0 | 5.0 | 0.75 (1.0) | | | | | | | | | | | | | | |
| 8P0 | 8.0 | 1.5 (2.0) | | | | | | | | | | | | | | |
| 012 | 12 | 2.2 (3.0) | | | | | | | | | | | | | | |
| 017 | 17.5 | 3.7 (5.0) | | | | | | | | | | | | | | |
| 024 | 24 | 5.5 (7.5) | | | | | | | | | | | | | | |
| 033 | 33 | 7.5 (10) | | | | | | | | | | | | | | |
| <i>c4</i> | | | | | | | | | | | | | | | | |
| Rating | | | | | | | | | | | | | | | | |
| 380-480V Three-Phase Input | | | | | | | | | | | | | | | | |
| Code | Amps | kW (Hp) | | | | | | | | | | | | | | |
| 1P4 | 1.4 | 0.4 (0.5) | | | | | | | | | | | | | | |
| 2P3 | 2.3 | 0.75 (1.0) | | | | | | | | | | | | | | |
| 4P0 | 4.0 | 1.5 (2.0) | | | | | | | | | | | | | | |
| 6P0 | 6.0 | 2.2 (3.0) | | | | | | | | | | | | | | |
| 010 | 10.5 | 4.0 (5.0) | | | | | | | | | | | | | | |
| 012 | 12 | 5.5 (7.5) | | | | | | | | | | | | | | |
| 017 | 17 | 7.5 (10) | | | | | | | | | | | | | | |
| 024 | 24 | 11 (15) | | | | | | | | | | | | | | |
| <i>c5</i> | | | | | | | | | | | | | | | | |
| Rating | | | | | | | | | | | | | | | | |
| 460-600V Three-Phase Input | | | | | | | | | | | | | | | | |
| Code | Amps | kW (Hp) | | | | | | | | | | | | | | |
| 1P7 | 1.7 | 0.75 (1.0) | | | | | | | | | | | | | | |
| 3P0 | 3.0 | 1.5 (2.0) | | | | | | | | | | | | | | |
| 4P2 | 4.2 | 2.2 (3.0) | | | | | | | | | | | | | | |
| 6P6 | 6.6 | 4.0 (5.0) | | | | | | | | | | | | | | |
| 9P9 | 9.9 | 5.5 (7.5) | | | | | | | | | | | | | | |
| 012 | 12 | 7.5 (10) | | | | | | | | | | | | | | |
| 019 | 19 | 11 (15) | | | | | | | | | | | | | | |
| <i>d</i> | | | | | | | | | | | | | | | | |
| Enclosure | | | | | | | | | | | | | | | | |
| Code | Enclosure | | | | | | | | | | | | | | | |
| C | IP66, NEMA/UL Type 4X * | | | | | | | | | | | | | | | |
| F | Flange Mount - IP20, NEMA/UL Type Open | | | | | | | | | | | | | | | |
| H | Replacement Plate Drive - IP20, NEMA/UL Type Open Contact factory for ordering information. | | | | | | | | | | | | | | | |
| N | Panel Mount - IP20, NEMA/UL Type Open | | | | | | | | | | | | | | | |
| <i>e</i> | | | | | | | | | | | | | | | | |
| HIM | | | | | | | | | | | | | | | | |
| Code | Interface Module | | | | | | | | | | | | | | | |
| 1 | Fixed Keypad | | | | | | | | | | | | | | | |
| <i>f</i> | | | | | | | | | | | | | | | | |
| Emission Class | | | | | | | | | | | | | | | | |
| Code | Rating | | | | | | | | | | | | | | | |
| 0 | Not Filtered | | | | | | | | | | | | | | | |
| 1 | Filtered | | | | | | | | | | | | | | | |
| <i>g</i> | | | | | | | | | | | | | | | | |
| Brake IGBT | | | | | | | | | | | | | | | | |
| Code | Description | | | | | | | | | | | | | | | |
| 3 | Without Brake | | | | | | | | | | | | | | | |
| 4 | With Brake | | | | | | | | | | | | | | | |
| <i>h</i> | | | | | | | | | | | | | | | | |
| Optional | | | | | | | | | | | | | | | | |
| Code | Purpose | | | | | | | | | | | | | | | |
| AA through ZZ | Reserved for custom firmware | | | | | | | | | | | | | | | |

* Check availability before ordering.

Product Selection

| Drive Ratings | | | PowerFlex 4 | | | IP 20 Flange Mount ⁽²⁾ | PowerFlex 40 | | | IP 66, UL Type 4X Panel Mount | IP 20 Flange Mount ⁽²⁾ |
|--|------|------|----------------|----------------|------------|-----------------------------------|----------------|----------------|------------|-------------------------------|-----------------------------------|
| Input Voltage | kW | HP | Output Current | Catalog Number | Frame Size | Catalog Number | Output Current | Catalog Number | Frame Size | Catalog Number | Catalog Number |
| 120V 50/60 Hz 1-Phase No Filter | 0.2 | 0.25 | 1.5A | 22A-V1P5N104 | A | 22A-V1P5F104 | — | — | — | — | — |
| | 0.4 | 0.5 | 2.3A | 22A-V2P3N104 | A | 22A-V2P3F104 | 2.3A | 22B-V2P3N104 | B | 22B-V2P3C104 | 22B-V2P3F104 |
| | 0.75 | 1.0 | 4.5A | 22A-V4P5N104 | B | 22A-V4P5F104 | 5.0A | 22B-V5P0N104 | B | 22B-V5P0C104 | 22B-V5P0F104 |
| | 1.1 | 1.5 | 6.0A | 22A-V6P0N104 | B | 22A-V6P0F104 | 6.0A | 22B-V6P0N104 | B | 22B-V6P0C104 | 22B-V6P0F104 |
| 240V 50/60 Hz 1-Phase NO BRAKE No Filter | 0.2 | 0.25 | 1.4A | 22A-A1P4N103 | A | — | — | — | — | — | — |
| | 0.4 | 0.5 | 2.1A | 22A-A2P1N103 | A | — | — | — | — | — | — |
| | 0.75 | 1.0 | 3.6A | 22A-A3P6N103 | A | — | — | — | — | — | — |
| | 1.5 | 2.0 | 6.8A | 22A-A6P8N103 | B | — | — | — | — | — | — |
| | 2.2 | 3.0 | 9.6 | 22A-A9P6N103 | B | — | — | — | — | — | — |
| 240V 50/60 Hz 1-Phase NO BRAKE With Integral "S Type" EMC Filter ⁽¹⁾ | 0.2 | 0.25 | 1.4A | 22A-A1P4N113 | A | — | — | — | — | — | — |
| | 0.4 | 0.5 | 2.1A | 22A-A2P1N113 | A | — | — | — | — | — | — |
| | 0.75 | 1.0 | 3.6A | 22A-A3P6N113 | A | — | — | — | — | — | — |
| | 1.5 | 2.0 | 6.8A | 22A-A6P8N113 | B | — | — | — | — | — | — |
| | 2.2 | 3.0 | 9.6 | 22A-A9P6N113 | B | — | — | — | — | — | — |
| 240V 50/60 Hz 1-Phase With Integral "S Type" EMC Filter ⁽¹⁾ | 0.2 | 0.25 | 1.5A | 22A-A1P5N114 | A | — | — | — | — | — | — |
| | 0.4 | 0.5 | 2.3A | 22A-A2P3N114 | A | — | 2.3A | 22B-A2P3N114 | B | — | — |
| | 0.75 | 1.0 | 4.5A | 22A-A4P5N114 | A | — | 5.0A | 22B-A5P0N114 | B | — | — |
| | 1.5 | 2.0 | 8.0A | 22A-A8P0N114 | B | — | 8.0A | 22B-A8P0N114 | B | — | — |
| | 2.2 | 3.0 | — | — | — | — | 12.0A | 22B-A012N114 | C | — | — |
| 240V 50/60 Hz 1-Phase No Filter | 0.2 | 0.25 | 1.5A | 22A-A1P5N104 | A | 22A-A1P5F104 | — | — | — | — | — |
| | 0.4 | 0.5 | 2.3A | 22A-A2P3N104 | A | 22A-A2P3F104 | 2.3A | 22B-A2P3N104 | B | 22B-A2P3C104 | 22B-A2P3F104 |
| | 0.75 | 1.0 | 4.5A | 22A-A4P5N104 | A | 22A-A4P5F104 | 5.0A | 22B-A5P0N104 | B | 22B-A5P0C104 | 22B-A5P0F104 |
| | 1.5 | 2.0 | 8.0A | 22A-A8P0N104 | B | 22A-A8P0F104 | 8.0A | 22B-A8P0N104 | B | 22B-A8P0C104 | 22B-A8P0F104 |
| | 2.2 | 3.0 | — | — | — | — | 12.0A | 22B-A012N104 | C | — | 22B-A012F104 |
| 240V 50/60 Hz 3-Phase No Filter | 0.2 | 0.25 | 1.5A | 22A-B1P5N104 | A | 22A-B1P5F104 | — | — | — | — | — |
| | 0.4 | 0.5 | 2.3A | 22A-B2P3N104 | A | 22A-B2P3F104 | 2.3A | 22B-B2P3N104 | B | 22B-B2P3C104 | 22B-B2P3F104 |
| | 0.75 | 1.0 | 4.5A | 22A-B4P5N104 | A | 22A-B4P5F104 | 5.0A | 22B-B5P0N104 | B | 22B-B5P0C104 | 22B-B5P0F104 |
| | 1.5 | 2.0 | 8.0A | 22A-B8P0N104 | A | 22A-B8P0F104 | 8.0A | 22B-B8P0N104 | B | 22B-B8P0C104 | 22B-B8P0F104 |
| | 2.2 | 3.0 | 12.0A | 22A-B012N104 | B | 22A-B012F104 | 12.0A | 22B-B012N104 | B | 22B-B012C104 | 22B-B012F104 |
| | 3.7 | 5.0 | 17.5A | 22A-B017N104 | B | 22A-B017F104 | 17.5A | 22B-B017N104 | B | 22B-B017C104 | 22B-B017F104 |
| | 5.5 | 7.5 | — | — | — | — | 24.0A | 22B-B024N104 | C | — | 22B-B024F104 |
| | 7.5 | 10.0 | — | — | — | — | 33.0A | 22B-B033N104 | C | — | 22B-B033F104 |
| 480V 50/60 Hz 3-Phase No Filter | 0.4 | 0.5 | 1.4A | 22A-D1P4N104 | A | 22A-D1P4F104 | 1.4A | 22B-D1P4N104 | B | 22B-D1P4C104 | 22B-D1P4F104 |
| | 0.75 | 1.0 | 2.3A | 22A-D2P3N104 | A | 22A-D2P3F104 | 2.3A | 22B-D2P3N104 | B | 22B-D2P3C104 | 22B-D2P3F104 |
| | 1.5 | 2.0 | 4.0A | 22A-D4P0N104 | A | 22A-D4P0F104 | 4.0A | 22B-D4P0N104 | B | 22B-D4P0C104 | 22B-D4P0F104 |
| | 2.2 | 3.0 | 6.0A | 22A-D6P0N104 | B | 22A-D6P0F104 | 6.0A | 22B-D6P0N104 | B | 22B-D6P0C104 | 22B-D6P0F104 |
| | 3.7 | 5.0 | 8.7A | 22A-D8P7N104 | B | 22A-D8P7F104 | — | — | — | — | — |
| | 4.0 | 5.0 | — | — | — | — | 10.5A | 22B-D010N104 | B | 22B-D010C104 | 22B-D010F104 |
| | 5.5 | 7.5 | — | — | — | — | 12.0A | 22B-D012N104 | C | — | 22B-D012F104 |
| | 7.5 | 10.0 | — | — | — | — | 17.0A | 22B-D017N104 | C | — | 22B-D017F104 |
| | 11.0 | 15.0 | — | — | — | — | 24.0A | 22B-D024N104 | C | — | 22B-D024F104 ⁽³⁾ |
| 600V 50/60 Hz 3-Phase No Filter | 0.75 | 1.0 | — | — | — | — | 1.7A | 22B-E1P7N104 | B | 22B-E1P7C104 | 22B-E1P7F104 |
| | 1.5 | 2.0 | — | — | — | — | 3.0A | 22B-E3P0N104 | B | 22B-E3P0C104 | 22B-E3P0F104 |
| | 2.2 | 3.0 | — | — | — | — | 4.2A | 22B-E4P2N104 | B | 22B-E4P2C104 | 22B-E4P2F104 |
| | 4.0 | 5.0 | — | — | — | — | 6.6A | 22B-E6P6N104 | B | 22B-E6P6C104 | 22B-E6P6F104 |
| | 5.5 | 7.5 | — | — | — | — | 9.9A | 22B-E9P9N104 | C | — | 22B-E9P9F104 |
| | 7.5 | 10.0 | — | — | — | — | 12.0A | 22B-E012N104 | C | — | 22B-E012F104 |
| | 11.0 | 15.0 | — | — | — | — | 19.0A | 22B-E019N104 | C | — | 22B-E019F104 |

(1) This filter is suitable for use with a cable length of at least 10 meters for Class A and 1 meter for Class B environments.

(2) Meets IP40/54/65 (NEMA 1/12/4/4X) when installed in an enclosure of like rating.

(3) Requires use of external DC Bus Inductor or AC Line Reactor.

Shaded areas are applicable to PowerFlex 40 only.

User Installed Options

IP30/NEMA 1/UL Type 1 Conversion Kit

| Item | Description | Drive Frame | PowerFlex 4 Catalog Number ⁽¹⁾ | PowerFlex 40 Catalog Number ⁽¹⁾ |
|---|---|-------------|---|--|
| IP30/NEMA 1/UL Type 1 Kit | Field installed kit. Converts drive to IP30/NEMA 1/UL Type 1 enclosure. Includes conduit box with mounting screws and plastic top panel. | A | 22-JBAA | — |
| | | B | 22-JBAB | 22-JBAB |
| | | C | — | 22-JBAC |
| IP30/NEMA 1/UL Type 1 Kit with Communication Option | Field installed kit. Converts drive to IP30/NEMA 1/UL Type 1 enclosure. Includes communication option conduit box with mounting screws and plastic top panel. | B | — | 22-JBCB |
| | | C | — | 22-JBCC |

(1) For pricing information, refer to the PowerFlex 4 Price List, publication 22A-PL001 and PowerFlex 40 Price List, publication 22B-PL001.

Human Interface Module Option Kits and Accessories

| Item | Description | Catalog Number ⁽¹⁾ |
|---------------------------------------|--|-------------------------------|
| Remote Human Interface Modules (HIMs) | LCD Display, Remote Panel Mount, Digital Speed Control, CopyCat capable, IP66 (NEMA Type 4X/12) indoor use only. Includes 2.0 meter cable. | 22-HIM-C2S |
| | LCD Display, Remote Handheld, Digital Speed Control, Full Numeric Keypad, CopyCat capable, IP30 (NEMA Type 1). Includes 1.0 meter cable. Can be panel mounted with optional Bezel Kit. | 22-HIM-A3 |
| | Remote Handheld, Wireless Interface Module with <i>Bluetooth</i> ® technology, IP30 (NEMA Type 1). Panel Mount with optional Bezel Kit. | 22-WIM-N1 |
| | Remote Panel Mount, Wireless Interface Module with <i>Bluetooth</i> ® technology, IP66 (NEMA Type 4X/12) indoor use only. | 22-WIM-N4S |
| Bezel Kit | Panel Mount for LCD Display, Remote Handheld unit, IP30 (NEMA Type 1). Includes a 22-RJ45CBL-C20 cable. | 22-HIM-B1 |
| DSI HIM Cable | DSI HIM Cable (DSI HIM to RJ45 cable) <ul style="list-style-type: none"> • 1.0 Meter (3.3 Feet) • 2.9 Meter (9.51 Feet) | 22-HIM-H10 22-HIM-H30 |

(1) For pricing information, refer to the PowerFlex 4 Price List, publication 22A-PL001 and PowerFlex 40 Price List, publication 22B-PL001.

Communication Option Kits

| Item | Description | Catalog Number ⁽¹⁾ |
|--|---|--|
| Serial Converter Module (RS485 to RS232) | Provides serial communication via DF1 protocol for use with DriveExplorer™ and DriveExecutive™ software. Smart Self-powered Serial Converter (RS-232) includes: <ul style="list-style-type: none"> • DSI to RS232 serial converter • DriveExplorer Lite Version 3.01 or later • 1203-SFC and 22-RJ45CBL-C20 Cables | 22-SCM-232 |
| Serial Cable | 2.0 meter serial cable with a locking low profile connector to connect to the serial converter and a 9-pin sub-miniature D female connector to connect to a computer. | 1203-SFC |
| Null Cable Converter | For use when connecting the serial converter to DriveExplorer on a handheld PC. | 1203-SNM |
| Universal Serial Bus™ (USB) Converter | Provides a direct, isolated USB connection for use with DriveExplorer and DriveExecutive software. Includes 2.0 meter USB cable, 20-HIM-H10 and 22-HIM-H10 cables. | 1203-USB |
| DSI Cable | 2.0 meter RJ45 to RJ45 cable, male to male connectors. | 22-RJ45CBL-C20 |
| Splitter Cable | RJ45 one to two port splitter cable. | AK-U0-RJ45-SC1 |
| Terminating Resistors | RJ45 120 Ohm resistor (2 pieces). | AK-U0-RJ45-TR1 |
| Terminal Block | RJ45 Two position terminal block (6 pieces). | AK-U0-RJ45-TB2P |
| External DSI Communications Kit | External communications kit for 22-COMM Communication Adapters. Multi-Drive capability allows connectivity for up to 5 drives. | 22-XCOMM-DC-BASE |
| External Comms Power Supply | Optional 100...240V AC power supply for external DSI communications kit. | 20-XCOMM-AC-PS1 |
| Communication Adapters | Embedded communication option for use with the PowerFlex family of drives. Requires a Communication Adapter Cover (Ordered Separately). <ul style="list-style-type: none"> • BACnet • ControlNet • DeviceNet • EtherNet/IP • LonWorks • PROFIBUS DP | 22-COMM-B 22-COMM-C 22-COMM-D 22-COMM-E 22-COMM-L 22-COMM-P |
| Compact I/O Module | Provides 3 channels that can be individually configured for Single, Multi-Drive, and Modbus RTU modes. | 1769-SM2 |
| Communication Adapter Covers | Houses the optional communication adapters. These covers add 25 mm (0.98 in.) to the overall depth of the drive. <ul style="list-style-type: none"> • PowerFlex 40 Drive Frame B • PowerFlex 40 Drive Frame C | 22B-CCB 22B-CCC |

(1) For pricing information, refer to the PowerFlex 4 Price List, publication 22A-PL001 and PowerFlex 40 Price List, publication 22B-PL001.

Shaded areas are applicable to PowerFlex 40 only.

PC Programming Software

| Item | Description | Catalog Number |
|-------------------------|---|----------------|
| DriveTools SP Software | "Windows" based software package that provides an intuitive means for monitoring or configuring Allen-Bradley drives and communications adapters online and offline. Compatibility: Windows 98, ME, NT, 4.0 (Service Pack 3 or later), 2000 and XP. ⁽¹⁾ | 9303-4DTE01ENE |
| DriveExplorer™ Software | "Windows" based software package that provides an intuitive means for monitoring or configuring Allen-Bradley drives and communications adapters online and offline. Compatibility: Windows 98, ME, NT, 4.0 (Service Pack 3 or later), 2000 and XP. ⁽¹⁾ | 9306-4EXP01ENE |

(1) See www.ab.com/drives/ for support devices.

DC Bus Inductors

| Input Voltage | kW | HP | Amps | Inductance (mh) | MTE Catalog Number |
|-----------------------|------|------|------|-----------------|--------------------|
| 240V 50/60 Hz 3-Phase | 5.5 | 7.5 | 32 | 0.85 | 32RB001 |
| | 7.5 | 10.0 | 40 | 0.5 | 40RB001 |
| 480V 50/60 Hz 3-Phase | 5.5 | 7.5 | 18 | 3.75 | 18RB004 |
| | 7.5 | 10.0 | 25 | 4.0 | 25RB005 |
| | 11.0 | 15.0 | 32 | 2.68 | 32RB003 |
| 600V 50/60 Hz 3-Phase | 5.5 | 7.5 | 12 | 6.0 | 12RB004 |
| | 7.5 | 10.0 | 18 | 6.0 | 18RB005 |
| | 11.0 | 15.0 | 25 | 4.0 | 25RB005 |

Shaded areas are applicable to PowerFlex 40 only.

Dynamic Brake Resistors

| Drive Ratings | | PowerFlex 4 | | PowerFlex 40 | |
|---------------------------------------|------|-------------|-------------------------------|-------------------------------|--|
| Input Voltage | kW | HP | Catalog Number ⁽¹⁾ | Catalog Number ⁽¹⁾ | |
| 120V 50/60 Hz 1-Phase | 0.2 | 0.25 | AK-R2-091P500 | — | |
| | 0.4 | 0.5 | AK-R2-091P500 | | |
| | 0.75 | 1.0 | | AK-R2-091P500 | |
| | 1.1 | 1.5 | AK-R2-091P500 | | |
| 240V 50/60 Hz 1-Phase | 0.2 | 0.25 | AK-R2-091P500 | — | |
| | 0.4 | 0.5 | AK-R2-091P500 | | |
| | 0.75 | 1.0 | | AK-R2-091P500 | |
| | 1.5 | 2.0 | | AK-R2-091P500 | |
| | 2.2 | 3.0 | — | AK-R2-047P500 | |
| 240V 50/60 Hz 3-Phase | 0.2 | 0.25 | AK-R2-091P500 | — | |
| | 0.4 | 0.5 | AK-R2-091P500 | | |
| | 0.75 | 1.0 | | AK-R2-091P500 | |
| | 1.5 | 2.0 | | AK-R2-091P500 | |
| | 2.2 | 3.0 | | AK-R2-047P500 | |
| | 3.7 | 5.0 | | AK-R2-047P500 | |
| | 5.5 | 7.5 | — | AK-R2-030P1K2 | |
| | 7.5 | 10.0 | — | AK-R2-030P1K2 | |
| 480V 50/60 Hz 3-Phase | 0.4 | 0.5 | AK-R2-360P500 | | |
| | 0.75 | 1.0 | | AK-R2-360P500 | |
| | 1.5 | 2.0 | | AK-R2-360P500 | |
| | 2.2 | 3.0 | | AK-R2-120P1K2 | |
| | 4.0 | 5.0 | | AK-R2-120P1K2 | |
| | 5.5 | 7.5 | — | AK-R2-120P1K2 | |
| | 7.5 | 10.0 | — | AK-R2-120P1K2 | |
| | 11.0 | 15.0 | — | AK-R2-120P1K2 ⁽²⁾ | |
| 600V 50/60 Hz 3-Phase No Filter | 0.75 | 1.0 | — | AK-R2-360P500 | |
| | 1.5 | 2.0 | — | AK-R2-360P500 | |
| | 2.2 | 3.0 | — | AK-R2-120P1K2 | |
| | 4.0 | 5.0 | — | AK-R2-120P1K2 | |
| | 5.5 | 7.5 | — | AK-R2-120P1K2 | |
| | 7.5 | 10.0 | — | AK-R2-120P1K2 | |
| | 11.0 | 15.0 | — | AK-R2-120P1K2 ⁽²⁾ | |

(1) Resistors listed in this table are rated for a minimum 5% duty cycle. See publication PFLEX-AT001 for additional information.

(2) Requires two resistors wired in parallel.

3% Line Reactors

| Input Voltage | kW | HP | Fundamental Amps | Max Continuous Amps | Inductance mh | Watts Loss | Catalog Number ⁽¹⁾ |
|---------------------------------------|------|------|------------------|---------------------|---------------|------------|-------------------------------|
| 240V 50/60 Hz 3-Phase | 0.2 | 0.25 | 2 | 3 | 12.0 | 7.5 W | 1321-3R2-A |
| | 0.4 | 0.5 | 4 | 6 | 12.0 | 21 W | 1321-3R4-D |
| | 0.75 | 1.0 | 8 | 12 | 3.0 | 29 W | 1321-3R8-B |
| | 1.5 | 2.0 | 8 | 12 | 1.5 | 19.5 W | 1321-3R8-A |
| | 2.2 | 3.0 | 12 | 18 | 1.25 | 26 W | 1321-3R12-A |
| | 3.7 | 5.0 | 18 | 27 | 0.8 | 36 W | 1321-3R18-A |
| | 5.5 | 7.5 | 25 | 37.5 | 0.5 | 48 W | 1321-3R25-A |
| | 7.5 | 10.0 | 35 | 52.5 | 0.4 | 49 W | 1321-3R35-A |
| 480V 50/60 Hz 3-Phase No Filter | 0.4 | 0.5 | 2 | 3 | 20.0 | 11.3 W | 1321-3R2-B |
| | 0.75 | 1.0 | 4 | 6 | 9.0 | 20 W | 1321-3R4-C |
| | 1.5 | 2.0 | 4 | 6 | 6.5 | 20 W | 1321-3R4-B |
| | 2.2 | 3.0 | 8 | 12 | 5.0 | 25.3 W | 1321-3R8-C |
| | 3.7 | 5.0 | 8 | 12 | 3.0 | 29 W | 1321-3R8-B |
| | 4.0 | 5.0 | 12 | 18 | 2.5 | 31 W | 1321-3R12-B |
| | 5.5 | 7.5 | 12 | 18 | 2.5 | 31 W | 1321-3R12-B |
| | 7.5 | 10.0 | 18 | 27 | 1.5 | 43 W | 1321-3R18-B |
| 600V 50/60 Hz 3-Phase No Filter | 11.0 | 15.0 | 25 | 37.5 | 1.2 | 52 W | 1321-3R25-B |
| | 0.75 | 1.0 | 2 | 3 | 20.0 | 11.3 W | 1321-3R2-B |
| | 1.5 | 2.0 | 4 | 6 | 6.5 | 20 W | 1321-3R4-B |
| | 2.2 | 3.0 | 4 | 6 | 6.5 | 20 W | 1321-3R4-B |
| | 4.0 | 5.0 | 8 | 12 | 5.0 | 25.3 W | 1321-3R8-C |
| | 5.5 | 7.5 | 12 | 18 | 2.5 | 31 W | 1321-3R12-B |
| | 7.5 | 10.0 | 12 | 18 | 2.5 | 31 W | 1321-3R12-B |
| | 11.0 | 15.0 | 18 | 27 | 1.5 | 43 W | 1321-3R18-B |

(1) Catalog numbers listed are for 3% impedance open style units. NEMA Type 1 and 5% impedance reactor types are also available. Refer to publication 1321-TD001.

Shaded areas are applicable to PowerFlex 40 only.

PowerFlex 4 EMC Filters

| Drive Ratings | | | S Type Filter Catalog Number ⁽¹⁾ | L Type Filter Catalog Number ⁽³⁾ |
|--------------------------|------|------|---|---|
| Input Voltage | kW | HP | | |
| 120V 50/60 Hz 1-Phase | 0.2 | 0.25 | — | 22-RF010-AL |
| | 0.4 | 0.5 | — | 22-RF010-AL |
| | 0.75 | 1.0 | — | 22-RF018-BL |
| 240V 50/60 Hz 1-Phase | 0.2 | 0.25 | (2) | 22-RF010-AL |
| | 0.4 | 0.5 | (2) | 22-RF010-AL |
| | 0.75 | 1.0 | (2) | 22-RF010-AL |
| | 1.5 | 2.0 | (2) | 22-RF018-BL |
| 240V 50/60 Hz 3-Phase | 0.2 | 0.25 | 22-RF9P5-AS | 22-RF9P5-AL |
| | 0.4 | 0.5 | 22-RF9P5-AS | 22-RF9P5-AL |
| | 0.75 | 1.0 | 22-RF9P5-AS | 22-RF9P5-AL |
| | 1.5 | 2.0 | 22-RF9P5-AS | 22-RF9P5-AL |
| | 2.2 | 3.0 | 22-RF021-BS | 22-RF021-BL |
| | 3.7 | 5.0 | 22-RF021-BS | 22-RF021-BL |
| 480V 50/60 Hz 3-Phase | 0.4 | 0.5 | 22-RF5P7-AS | 22-RF5P7-AL |
| | 0.75 | 1.0 | 22-RF5P7-AS | 22-RF5P7-AL |
| | 1.5 | 2.0 | 22-RF5P7-AS | 22-RF5P7-AL |
| | 2.2 | 3.0 | 22-RF012-BS | 22-RF012-BL |
| | 4.0 | 5.0 | 22-RF012-BS | 22-RF012-BL |

PowerFlex 40 EMC Filters

| Drive Ratings | | | S Type Filter Catalog Number ⁽¹⁾ | L Type Filter Catalog Number ⁽³⁾ |
|--------------------------|------|------|---|---|
| Input Voltage | kW | HP | | |
| 120V 50/60 Hz 1-Phase | 0.4 | 0.5 | — | 22-RF018-BL |
| | 0.75 | 1.0 | — | 22-RF018-BL |
| | 1.1 | 1.5 | — | 22-RF018-BL |
| 240V 50/60 Hz 1-Phase | 0.4 | 0.5 | (2) | 22-RF018-BL |
| | 0.75 | 1.0 | (2) | 22-RF018-BL |
| | 1.5 | 2.0 | (2) | 22-RF018-BL |
| | 2.2 | 3.0 | (2) | 22-RF025-CL |
| 240V 50/60 Hz 3-Phase | 0.4 | 0.5 | 22-RF021-BS ⁽⁴⁾ | 22-RF021-BL |
| | 0.75 | 1.0 | 22-RF021-BS ⁽⁴⁾ | 22-RF021-BL |
| | 1.5 | 2.0 | 22-RF021-BS ⁽⁴⁾ | 22-RF021-BL |
| | 2.2 | 3.0 | 22-RF021-BS ⁽⁴⁾ | 22-RF021-BL |
| | 3.7 | 5.0 | 22-RF021-BS ⁽⁴⁾ | 22-RF021-BL |
| | 5.5 | 7.5 | 22-RF034-CS | 22-RF034-CL |
| | 7.5 | 10.0 | 22-RF034-CS | 22-RF034-CL |
| 480V 50/60 Hz 3-Phase | 0.4 | 0.5 | 22-RF012-BS | 22-RF012-BL |
| | 0.75 | 1.0 | 22-RF012-BS | 22-RF012-BL |
| | 1.5 | 2.0 | 22-RF012-BS | 22-RF012-BL |
| | 2.2 | 3.0 | 22-RF012-BS | 22-RF012-BL |
| | 4.0 | 5.0 | 22-RF012-BS | 22-RF012-BL |
| | 5.5 | 7.5 | 22-RF018-CS | 22-RF018-CL |
| | 7.5 | 10.0 | 22-RF018-CS | 22-RF018-CL |
| 600V 50/60 Hz 3-Phase | 0.75 | 1.0 | — | 22-RF8P0-BL |
| | 1.5 | 2.0 | — | 22-RF8P0-BL |
| | 2.2 | 3.0 | — | 22-RF8P0-BL |
| | 4.0 | 5.0 | — | 22-RF8P0-BL |
| | 5.5 | 7.5 | — | 22-RF015-CL |
| | 7.5 | 10.0 | — | 22-RF015-CL |
| | 11.0 | 15.0 | — | 22-RF024-CL |

(1) This filter is suitable for use with a cable length up to 10 meters for Class A and 1 meter for Class B environments.

(2) Drives are available in these ratings with internal "S Type" filters.

(3) This filter is suitable for use with a cable length up to 100 meters for Class A and 5 meters for Class B environments.

(4) Filter must be Series B or later.

PowerFlex 4 & 40 Spare Parts

| Description | Catalog Number |
|---|----------------|
| PowerFlex 4 Fan Replacement Kit - Frame A | SK-U1-FAN1-A1 |
| PowerFlex 4/40 Fan Replacement Kit - Frame B, 1 Fan | SK-U1-FAN1-B1 |
| PowerFlex 4/40 Fan Replacement Kit - Frame B, 2 Fans | SK-U1-FAN2-B1 |
| PowerFlex 40 Fan Replacement Kit - Frame C, 1 Fan | SK-U1-FAN1-C1 |
| PowerFlex 40 Fan Replacement Kit - Frame C, 1 Fan (15 HP) | SK-U1-FAN1-C2 |
| PowerFlex 4 Frame A Cover with Power Terminal Guard | SK-U1-ACVR1-A1 |
| PowerFlex 4 Frame B Cover with Power Terminal Guard | SK-U1-ACVR1-B1 |
| PowerFlex 40 Frame B Cover with Power Terminal Guard | SK-U1-BCVR1-B1 |
| PowerFlex 40 Frame C Cover with Power Terminal Guard | SK-U1-BCVR1-C1 |

Shaded areas are applicable to PowerFlex 40 only.


Installation Considerations

PowerFlex 4 and 40 drives have the following built in protective features to help simplify installation.

- Ground fault protection while starting and running ensures reliable operation
- Electronic motor overload protection increases motor life
- Removable MOV to ground ensures compatibility with ungrounded systems
- 6kV transient protection provides increased robustness for 380...480V system voltages

There are many other factors that must be considered for optimal performance in any given application. The block diagram below highlights the primary installation considerations. Consult the PowerFlex 4 or PowerFlex 40 User Manual, Publications 22A-UM001 or 22B-UM001 available online at www.rockwellautomation.com/literature, for detailed recommendations on input power conditioning, CE conformance (EMC filtering), dynamic braking, reflected wave protection, motor cable types and motor cable distances.


Block Diagram

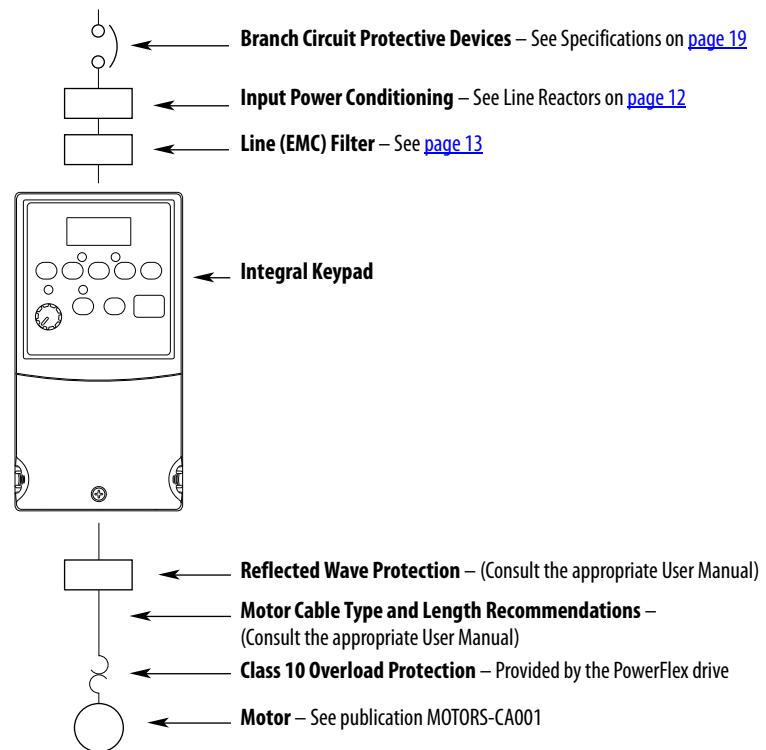

Control Wiring

PowerFlex 4

- The control logic is 24V DC and can be set for either Sink or Source control via a DIP switch setting.
- Control terminal screws are sized for a conventional blade screw driver.
- I/O Terminals 1, 2 and 3 are dedicated for Stop, Start and Reverse operation respectively. These I/O Terminals can be programmed for 2- or 3-Wire operation to meet application requirements.
- I/O Terminals 4 and 5 are programmable and provide added flexibility. Programmable functions include:
 - Local Control
 - Preset Frequencies
 - Jog
 - RS485 Control
 - Second Accel/Decel
 - Auxiliary Fault
 - Clear Fault
- Speed can be controlled via a 0...10V input or 4...20 mA input. Both are electrically isolated from the drive.
- One form C relay can be programmed to provide the status of a wide variety of drive conditions.
- The drive is shipped with a jumper installed between I/O Terminals 01 and 11 to allow out of box operation from the keypad.

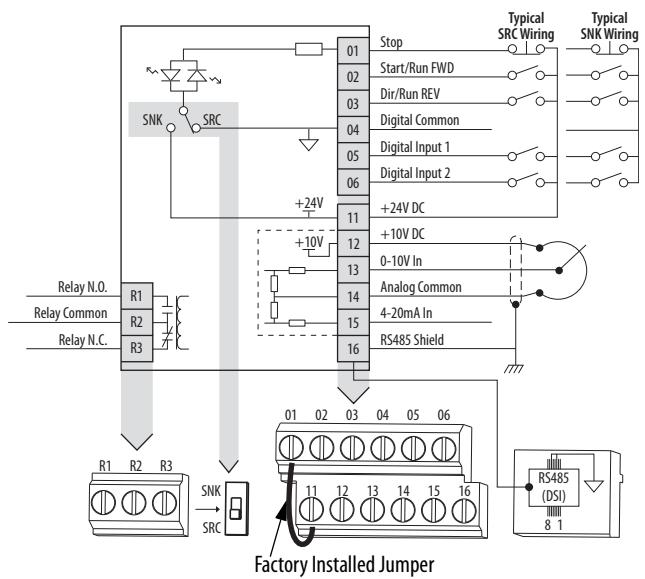

| No. | Signal | Default | Description | 30V DC | 125V AC | 240V AC |
|-----|--------------|---------|---|------------------------|----------------|----------------|
| R1 | Relay N.O. | Fault | Normally open contact for output relay. | | | |
| R2 | Relay Common | — | Common for output relay. | | | |
| R3 | Relay N.C. | Fault | Normally closed contact for output relay. | Resistive Inductive | 3.0 A 0.5 A | 3.0 A 0.5 A |


| | | |
|------------------------|--------------|---|
| Sink/Source DIP Switch | Source (SRC) | Inputs can be wired as Sink (SNK) or Source (SRC) via DIP Switch setting. |
|------------------------|--------------|---|

| | | | |
|----|-----------------------------|-------------|--|
| 01 | Stop ⁽¹⁾ | Coast | The factory installed jumper or a normally closed input must be present for the drive to start. |
| 02 | Start/Run FWD | Not Active | Command comes from the integral keypad by default. To disable reverse operation, see A095 [Reverse Disable]. |
| 03 | Direction/Run REV | Not Active | |
| 04 | Digital Common | — | For digital inputs. Electronically isolated with digital inputs from analog I/O. |
| 05 | Digital Input 1 | Preset Freq | Program with A051 [Digital In1 Sel]. |
| 06 | Digital Input 2 | Preset Freq | Program with A052 [Digital In2 Sel]. |
| 11 | +24V DC | — | Drive supplied power for digital inputs. Maximum output current is 100 mA. |
| 12 | +10V DC | — | Drive supplied power for 0...10V external potentiometer. Maximum output current is 15 mA. |
| 13 | 0...10V In ⁽¹⁾ | Not Active | For external 0...10V input supply (input impedance = 100k ohm) or potentiometer wiper. |
| 14 | Analog Common | — | For 0...10V In or 4...20 mA In. Electronically isolated with analog inputs from digital I/O. |
| 15 | 4...20 mA In ⁽¹⁾ | Not Active | For external 4...20 mA input supply (input impedance = 250 ohm). |
| 16 | RS485 (DSI) Shield | — | Terminal should be connected to safety ground - PE when using the RS485 (DSI) communications port. |

(1) Only one analog frequency source may be connected at a time. If more than one reference is connected at the same time, an undetermined frequency reference will result.

PowerFlex 40

- The control logic is 24V DC and can be set for either Sink or Source control via a DIP switch setting.
- Control terminal screws are sized for a conventional blade screw driver.
- I/O Terminals 1, 2 and 3 are dedicated for Stop, Start and Reverse operation respectively. These I/O Terminals can be programmed for 2- or 3-Wire operation to meet application requirements.
- I/O Terminals 5, 6, 7 and 8 are programmable and provide added flexibility. Programmable functions include Local Control, Jog, Second Accel/Decel, Clear Fault, Preset Frequencies, RS485 Control and Auxiliary Fault.
- Speed can be controlled via a 0...10V input and/or 4...20 mA input. Both inputs are independently isolated from the rest of the drive and can be used for applications such as PID. Voltage input can be programmed for bipolar operation.
- The drive is shipped with a jumper installed between I/O Terminals 01 and 11 to allow out of box operation from the keypad.

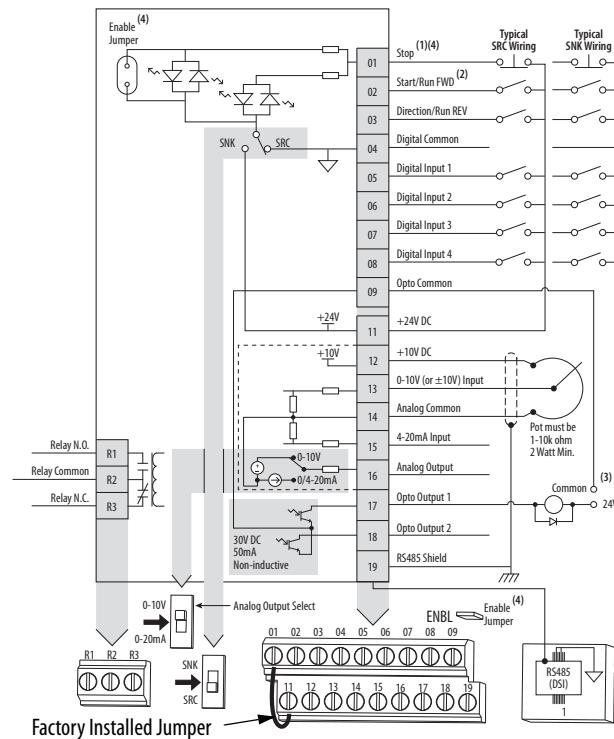

| No. | Signal | Default | Description |
|---------------------------------|-----------------------------|--------------|---|
| R1 | Relay N.O. | Fault | Normally open contact for output relay. |
| R2 | Relay Common | – | Common for output relay. |
| R3 | Relay N.C. | Fault | Normally closed contact for output relay. |
| Analog Output Select DIP Switch | | 0...10V | Sets analog output to either voltage or current. Setting must match A065 [Analog Out Sel]. |
| Sink/Source DIP Switch | | Source (SRC) | Inputs can be wired as Sink (SNK) or Source (SRC) via DIP Switch setting. |
| 01 | Stop | Coast | The factory installed jumper or a normally closed input must be present for the drive to start. |
| 02 | Start/Run FWD | Not Active | Command comes from the integral keypad by default. To disable reverse operation, see A095 [Reverse Disable]. |
| 03 | Direction/Run REV | Not Active | |
| 04 | Digital Common | – | For digital inputs. Electronically isolated with digital inputs from analog I/O and opto outputs. |
| 05 | Digital Input 1 | Preset Freq | Program with A051 [Digital In1 Sel]. |
| 06 | Digital Input 2 | Preset Freq | Program with A052 [Digital In2 Sel]. |
| 07 | Digital Input 3 | Local | Program with A053 [Digital In3 Sel]. |
| 08 | Digital Input 4 | Jog Forward | Program with A054 [Digital In4 Sel]. |
| 09 | Opto Common | – | For opto-coupled outputs. Electronically isolated with opto outputs from analog I/O and digital inputs. |
| 11 | +24V DC | – | Referenced to Digital Common. Drive supplied power for digital inputs. Maximum output current is 100 mA. |
| 12 | +10V DC | – | Referenced to Analog Common. Drive supplied power for 0...10V external potentiometer. Maximum output current is 15 mA. |
| 13 | ±10V In ⁽¹⁾ | Not Active | For external 0...10V (unipolar) or ±10V (bipolar) input supply (input impedance = 100k ohm) or potentiometer wiper. |
| 14 | Analog Common | – | For 0...10V In or 4...20 mA In. Electronically isolated with analog inputs and outputs from digital I/O and opto outputs. |
| 15 | 4...20 mA In ⁽¹⁾ | Not Active | For external 4...20 mA input supply (input impedance = 250 ohm). |
| 16 | Analog Output | OutFreq 0-10 | The default analog output is 0...10V. To convert to a current value, change the Analog Output Select DIP Switch to 0...20mA. Program with A065 [Analog Out Sel]. Max analog value can be scaled with A066 [Analog Out High]. Maximum Load: 4...20 mA = 525 ohm (10.5V) 0...10V = 1k ohm (10 mA) |
| 17 | Opto Output 1 | MotorRunning | Program with A058 [Opto Out1 Sel] |
| 18 | Opto Output 2 | At Frequency | Program with A061 [Opto Out2 Sel] |
| 19 | RS485 (DSI) Shield | – | Terminal should be connected to safety ground - PE when using the RS485 (DSI) communications port. |

(1) 0...10V In and 4...20 mA In are distinct input channels and may be connected simultaneously. Inputs may be used independently for speed control or jointly when operating in PID mode.

Specifications

Drive Ratings — PowerFlex 4

| Catalog Number | Output Ratings | | Input Ratings | | | Branch Circuit Protection | | | | Power Dissipation | |
|---|----------------|------|---------------|------|------|---------------------------|--|------------|--|-------------------|-------|
| | kW (HP) | Amps | Voltage Range | kVA | Amps | Fuses ⁽²⁾ | 140M Motor Protectors ^{(3) (4)} | Contactors | Min. Enclosure Volume ⁽⁵⁾ (in. ³) | Internal | Total |
| 100...120V AC – 1-Phase Input, 0...230V 3-Phase Output | | | | | | | | | | | |
| 22A-V1P5N104 | 0.2 (0.25) | 1.5 | 90...126 | 0.75 | 6.0 | 10 | 140M-C2E-C10 | 100-C09 | 1655 | 10 | 25 |
| 22A-V2P3N104 | 0.4 (0.5) | 2.3 | 90...126 | 1.15 | 9.0 | 15 | 140M-C2E-C16 | 100-C12 | 1655 | 9 | 30 |
| 22A-V4P5N104 | 0.75 (1.0) | 4.5 | 90...126 | 2.25 | 18.0 | 30 | 140M-D8E-C20 | 100-C23 | 1655 | 12 | 50 |
| 22A-V6P0N104 | 1.1 (1.5) | 6.0 | 90...126 | 3.00 | 24.0 | 40 | 140M-F8E-C32 | 100-C37 | 1655 | 12 | 70 |
| 200...240V AC – 1-Phase Input, 0...230V 3-Phase Output (No Brake) ⁽¹⁾ | | | | | | | | | | | |
| 22A-A1P4N103 | 0.2 (0.25) | 1.4 | 180...265 | 0.7 | 3.2 | 6 | 140M-C2E-B40 | 100-C09 | 1655 | 10 | 25 |
| 22A-A2P1N103 | 0.4 (0.5) | 2.1 | 180...265 | 1.05 | 5.3 | 10 | 140M-C2E-B63 | 100-C09 | 1655 | 9 | 30 |
| 22A-A3P6N103 | 0.75 (1.0) | 3.6 | 180...265 | 1.8 | 9.2 | 15 | 140M-C2E-C16 | 100-C12 | 1655 | 12 | 50 |
| 22A-A6P8N103 | 1.5 (2.0) | 6.8 | 180...265 | 3.4 | 14.2 | 25 | 140M-C2E-C16 | 100-C16 | 1655 | 16 | 80 |
| 22A-A9P6N103 | 2.2 (3.0) | 9.6 | 180...265 | 4.8 | 19.6 | 30 | 140M-D8E-C25 | 100-C23 | 1655 | 11 | 110 |
| 200...240V AC – 1-Phase Input, 0...230V 3-Phase Output ⁽¹⁾ | | | | | | | | | | | |
| 22A-A1P5N104 | 0.2 (0.25) | 1.5 | 180...265 | 0.75 | 5.0 | 10 | 140M-C2E-B63 | 100-C09 | 1655 | 10 | 25 |
| 22A-A2P3N104 | 0.4 (0.5) | 2.3 | 180...265 | 1.15 | 6.0 | 10 | 140M-C2E-B63 | 100-C09 | 1655 | 9 | 30 |
| 22A-A4P5N104 | 0.75 (1.0) | 4.5 | 180...265 | 2.25 | 10.0 | 15 | 140M-C2E-C16 | 100-C12 | 1655 | 12 | 50 |
| 22A-A8P0N104 | 1.5 (2.0) | 8.0 | 180...265 | 4.0 | 18.0 | 30 | 140M-D8E-C20 | 100-C23 | 1655 | 16 | 80 |
| 200...240V AC – 3-Phase Input, 0...230V 3-Phase Output | | | | | | | | | | | |
| 22A-B1P5N104 | 0.2 (0.25) | 1.5 | 180...265 | 0.75 | 1.8 | 3 | 140M-C2E-B25 | 100-C09 | 1655 | 10 | 25 |
| 22A-B2P3N104 | 0.4 (0.5) | 2.3 | 180...265 | 1.15 | 2.5 | 6 | 140M-C2E-B40 | 100-C09 | 1655 | 9 | 30 |
| 22A-B4P5N104 | 0.75 (1.0) | 4.5 | 180...265 | 2.25 | 5.2 | 10 | 140M-C2E-C10 | 100-C09 | 1655 | 12 | 50 |
| 22A-B8P0N104 | 1.5 (2.0) | 8.0 | 180...265 | 4.0 | 9.5 | 15 | 140M-C2E-C16 | 100-C12 | 1655 | 16 | 80 |
| 22A-B012N104 | 2.2 (3.0) | 12.0 | 180...265 | 5.5 | 15.5 | 25 | 140M-C2E-C16 | 100-C16 | 1655 | 16 | 115 |
| 22A-B017N104 | 3.7 (5.0) | 17.5 | 180...265 | 8.6 | 21.0 | 35 | 140M-F8E-C25 | 100-C23 | 1655 | 16 | 165 |
| 380...480V AC – 3-Phase Input, 0...460V 3-Phase Output | | | | | | | | | | | |
| 22A-D1P4N104 | 0.4 (0.5) | 1.4 | 340...528 | 1.4 | 1.8 | 3 | 140M-C2E-B25 | 100-C09 | 1655 | 15 | 30 |
| 22A-D2P3N104 | 0.75 (1.0) | 2.3 | 340...528 | 2.3 | 3.2 | 6 | 140M-C2E-B40 | 100-C09 | 1655 | 13 | 40 |
| 22A-D4P0N104 | 1.5 (2.0) | 4.0 | 340...528 | 4.0 | 5.7 | 10 | 140M-C2E-B63 | 100-C09 | 1655 | 13 | 60 |
| 22A-D6P0N104 | 2.2 (3.0) | 6.0 | 340...528 | 5.9 | 7.5 | 15 | 140M-C2E-C10 | 100-C09 | 1655 | 17 | 90 |
| 22A-D8P7N104 | 3.7 (5.0) | 8.7 | 340...528 | 8.6 | 9.0 | 15 | 140M-C2E-C16 | 100-C16 | 1655 | 14 | 145 |

(1) 200...240V AC - 1-Phase drives are also available with an integral EMC filter. Catalog suffix changes from N104 to N114 or N103 to N113.

(2) Recommended Fuse Type: UL Class J, CC, T or Type BS88; 600V (550V) or equivalent.

(3) The AIC ratings of the Bulletin 140M Motor Protector Circuit Breakers may vary. See [Bulletin 140M Motor Protection Circuit Breakers Application Ratings](#).

(4) Manual Self-Protected (Type E) Combination Motor Controller, UL listed for 208 Wye or Delta, 240 Wye or Delta, 480Y/277 or 600Y/347. Not UL listed for use on 480V or 600V Delta/Delta, corner ground, or high-resistance ground systems.

(5) When using a Manual Self-Protected (Type E) Combination Motor Controller, the drive must be installed in a ventilated or non-ventilated enclosure with the minimum volume specified in this column. Application specific thermal considerations may require a larger enclosure.

Drive Ratings — PowerFlex 40

| Catalog Number | Output Ratings | | Input Ratings | | | Branch Circuit Protection | | | | Power Dissipation | |
|--|----------------|------|---------------|------|------|---------------------------|--|------------|--|-------------------|-------|
| | kW (HP) | Amps | Voltage Range | kVA | Amps | Fuses ⁽²⁾ | 140M Motor Protectors ^{(3) (4)} | Contactors | Min. Enclosure Volume ⁽⁵⁾ (in. ³) | Internal | Total |
| 100...120V AC – 1-Phase Input, 0...230V 3-Phase Output | | | | | | | | | | | |
| 22B-V2P3N104 | 0.4 (0.5) | 2.3 | 90...132 | 1.15 | 9.0 | 15 | 140M-C2E-C16 | 100-C12 | 1655 | 9 | 30 |
| 22B-V5P0N104 | 0.75 (1.0) | 5.0 | 90...132 | 2.45 | 20.3 | 35 | 140M-D8E-C20 | 100-C23 | 1655 | 12 | 55 |
| 22B-V6P0N104 | 1.1 (1.5) | 6.0 | 90...132 | 3.0 | 24.0 | 40 | 140M-F8E-C32 | 100-C37 | 1655 | 12 | 70 |
| 200...240V AC – 1-Phase Input, 0...230V 3-Phase Output ⁽¹⁾ | | | | | | | | | | | |
| 22B-A2P3N104 | 0.4 (0.5) | 2.3 | 180...264 | 1.15 | 6.0 | 10 | 140M-C2E-B63 | 100-C09 | 1655 | 9 | 30 |
| 22B-A5P0N104 | 0.75 (1.0) | 5.0 | 180...264 | 2.45 | 12.0 | 20 | 140M-C2E-C16 | 100-C12 | 1655 | 12 | 55 |
| 22B-A8P0N104 | 1.5 (2.0) | 8.0 | 180...264 | 4.0 | 18.0 | 30 | 140M-D8E-C20 | 100-C23 | 1655 | 16 | 80 |
| 22B-A012N104 | 2.2 (3.0) | 12.0 | 180...264 | 5.5 | 25.0 | 40 | 140M-F8E-C32 | 100-C37 | 2069 | 11 | 110 |
| 200...240V AC – 3-Phase Input, 0...230V 3-Phase Output | | | | | | | | | | | |
| 22B-B2P3N104 | 0.4 (0.5) | 2.3 | 180...264 | 1.15 | 2.5 | 6 | 140M-C2E-B40 | 100-C07 | 1655 | 9 | 30 |
| 22B-B5P0N104 | 0.75 (1.0) | 5.0 | 180...264 | 2.45 | 5.7 | 10 | 140M-C2E-C10 | 100-C09 | 1655 | 12 | 55 |
| 22B-B8P0N104 | 1.5 (2.0) | 8.0 | 180...264 | 4.0 | 9.5 | 15 | 140M-C2E-C16 | 100-C12 | 1655 | 16 | 80 |
| 22B-B012N104 | 2.2 (3.0) | 12.0 | 180...264 | 5.5 | 15.5 | 25 | 140M-C2E-C16 | 100-C23 | 1655 | 16 | 115 |
| 22B-B017N104 | 3.7 (5.0) | 17.5 | 180...264 | 8.6 | 21.0 | 35 | 140M-F8E-C25 | 100-C23 | 1655 | 16 | 165 |
| 22B-B024N104 | 5.5 (7.5) | 24.0 | 180...264 | 11.8 | 26.1 | 40 | 140M-F8E-C32 | 100-C37 | 2069 | 28 | 225 |
| 22B-B033N104 | 7.5 (10.0) | 33.0 | 180...264 | 16.3 | 34.6 | 60 | 140M-F8E-C45 | 100-C60 | 2069 | 28 | 290 |
| 380...480V AC – 3-Phase Input, 0...460V 3-Phase Output | | | | | | | | | | | |
| 22B-D1P4N104 | 0.4 (0.5) | 1.4 | 342...528 | 1.4 | 1.8 | 3 | 140M-C2E-B25 | 100-C07 | 1655 | 15 | 30 |
| 22B-D2P3N104 | 0.75 (1.0) | 2.3 | 342...528 | 2.3 | 3.2 | 6 | 140M-C2E-B40 | 100-C07 | 1655 | 13 | 40 |
| 22B-D4P0N104 | 1.5 (2.0) | 4.0 | 342...528 | 4.0 | 5.7 | 10 | 140M-C2E-B63 | 100-C09 | 1655 | 13 | 60 |
| 22B-D6P0N104 | 2.2 (3.0) | 6.0 | 342...528 | 5.9 | 7.5 | 15 | 140M-C2E-C10 | 100-C09 | 1655 | 17 | 90 |
| 22B-D010N104 | 4.0 (5.0) | 10.5 | 342...528 | 10.3 | 13.0 | 20 | 140M-C2E-C16 | 100-C23 | 1655 | 14 | 150 |
| 22B-D012N104 | 5.5 (7.5) | 12.0 | 342...528 | 11.8 | 14.2 | 25 | 140M-D8E-C20 | 100-C23 | 2069 | 23 | 160 |
| 22B-D017N104 | 7.5 (10.0) | 17.0 | 342...528 | 16.8 | 18.4 | 30 | 140M-D8E-C20 | 100-C23 | 2069 | 24 | 200 |
| 22B-D024N104 | 11.0 (15.0) | 24.0 | 342...528 | 23.4 | 26.0 | 50 | 140M-F8E-C32 | 100-C43 | 2069 | 25 | 285 |
| 460...600V AC – 3-Phase Input, 0...575V 3-Phase Output | | | | | | | | | | | |
| 22B-E1P7N104 | 0.75 (1.0) | 1.7 | 414...660 | 2.1 | 2.3 | 6 | 140M-C2E-B25 | 100-C09 | 1655 | 13 | 40 |
| 22B-E3P0N104 | 1.5 (2.0) | 3.0 | 414...660 | 3.65 | 3.8 | 6 | 140M-C2E-B40 | 100-C09 | 1655 | 13 | 60 |
| 22B-E4P2N104 | 2.2 (3.0) | 4.2 | 414...660 | 5.2 | 5.3 | 10 | 140M-D8E-B63 | 100-C09 | 1655 | 17 | 90 |
| 22B-E6P6N104 | 4.0 (5.0) | 6.6 | 414...660 | 8.1 | 8.3 | 15 | 140M-D8E-C10 | 100-C09 | 1655 | 14 | 150 |
| 22B-E9P9N104 | 5.5 (7.5) | 9.9 | 414...660 | 12.1 | 11.2 | 20 | 140M-D8E-C16 | 100-C16 | 2069 | 23 | 160 |
| 22B-E012N104 | 7.5 (10.0) | 12.2 | 414...660 | 14.9 | 13.7 | 25 | 140M-D8E-C16 | 100-C23 | 2069 | 24 | 200 |
| 22B-E019N104 | 11.0 (15.0) | 19.0 | 414...660 | 23.1 | 24.1 | 40 | 140M-F8E-C25 | 100-C30 | 2069 | 25 | 285 |

(1) 200...240V AC - 1-Phase drives are also available with an integral EMC filter. Catalog suffix changes from N104 to N114 or N103 to N113.

(2) Recommended Fuse Type: UL Class J, CC, T or Type BS88; 600V (550V) or equivalent.

(3) The AIC ratings of the Bulletin 140M Motor Protector Circuit Breakers may vary. See [Bulletin 140M Motor Protection Circuit Breakers Application Ratings](#).

(4) Manual Self-Protected (Type E) Combination Motor Controller, UL listed for 208 Wye or Delta, 240 Wye or Delta, 480Y/277 or 600Y/347. Not UL listed for use on 480V or 600V Delta/Delta, corner ground, or high-resistance ground systems.

(5) When using a Manual Self-Protected (Type E) Combination Motor Controller, the drive must be installed in a ventilated or non-ventilated enclosure with the minimum volume specified in this column. Application specific thermal considerations may require a larger enclosure.

| | | |
|--|---|---|
| Input/Output Ratings | Output Frequency: Efficiency: | PowerFlex 4: 0...240 Hz (Programmable) PowerFlex 40: 0...400 Hz (Programmable) 97.5% (Typical) |
| Approvals |     LV Directive 73/23/EEC LV: EN 50178, EN 60204 EMC Directive 89/336/EEC EMC: EN 61800-3 | |
| Control Inputs | Digital SRC (Source) Mode: SNK (Sink) Mode: Analog 4...20 mA Analog: 0...10V DC Analog: External Pot: | Input Current = 6 mA 18...24V = 0n, 0...6V = Off 0...6V = On, 18...24V = Off 250 ohm input impedance 100k ohm input impedance 1...10k ohms, 2 Watt minimum |
| Control Output – Programmable Output (form C relay) | Resistive Rating Opto Outputs (PF 40): Analog Outputs (PF 40): Inductive Rating Opto Outputs (PF 40): Analog Outputs (PF 40): | 3.0A at 30V DC, 3.0A at 125V AC, 3.0A at 240V AC 30V DC, 50 mA 10-bit, 0...10V, 1k ohm minimum 0.5A at 30V DC, 0.5A at 125V AC, 0.5A at 240V AC Non-inductive 10 bit, 4...20 mA, 525 ohm maximum |
| Fuses and Circuit Breakers | Recommended Fuse Type: Recommended Circuit Breakers: | UL Class J, CC, T or Type B588; 600V (550V) or equivalent. HMCP circuit breaker or equivalent. |
| Protective Features | Motor Protection: Overcurrent: Control Ride Through: Faultless Power Ride Through: Over Voltage: Under Voltage: | I ² t Overload Protection, 150% for 60 sec., 200% for 3 sec. (provides Class 10 protection) 200% hardware limit, 300% instantaneous fault Minimum Ride Through is 0.5 sec. - typical value is 2 seconds 100 milliseconds 100...120V AC Input – Trip occurs at 405V DC bus voltage (= 150V AC incoming line) 200...240V AC Input – Trip occurs at 405V DC bus voltage (= 290V AC incoming line) 380...480V AC Input – Trip occurs at 810V DC bus voltage (= 575V AC incoming line) 460...600V AC Input (PF 40) – Trip occurs at 1005V DC bus voltage (= 711V AC incoming line) 100...120V AC Input – Trip occurs at 210V DC bus voltage (= 75V AC incoming line) 200...240V AC Input – Trip occurs at 210V DC bus voltage (= 150V AC incoming line) 380...480V AC Input – Trip occurs at 390V DC bus voltage (= 275V AC incoming line) 460...600V AC Input (PF 40) If P042 = 1 "High Voltage" trip occurs at 487V DC bus voltage (344V AC incoming line); If P042 = 0 "Low Voltage" trip occurs at 390V DC bus voltage (275V AC incoming line) |
| Dynamic Braking | Internal brake IGBT included with all ratings except No Brake drives (Cat. Nos. 22A-AxPxN103 or 22A-AxPxN113). Refer to page 11 for ordering information. | |
| Environment | Altitude: Ambient Operating Temperature: Cooling Method: Storage Temperature: Atmosphere: Relative Humidity: Shock (operating): Vibration (operating): | 1000 m (3300 ft.) maximum without derating IP20, NEMA/UL Type Open: -10 to 50 degrees C (14 to 122 degrees F) IP30, NEMA/UL Type 1: -10 to 40 degrees C (14 to 104 degrees F) IP66, NEMA/UL Type 4X/12 (PF 40): -10 to 40 degrees C (14 to 104 degrees F) Fan, all drive ratings -40 to 85 degrees C (-40 to 185 degrees F) Important: Drive <u>must</u> not be installed in an area where the ambient atmosphere contains volatile or corrosive gas, vapors or dust. If the drive is not going to be installed for a period of time, it must be stored in an area where it will not be exposed to a corrosive atmosphere. 0 to 95% non-condensing 15G peak for 11ms duration ($\pm 1.0\text{ms}$) 1G peak, 5 to 2000 Hz |
| Control | Carrier Frequency: Frequency Accuracy: Speed Regulation: Stop Modes: Accel/Decel: Intermittent Overload: Electronic Motor Overload Protection: | 2...16 kHz. Drive rating based on 4 kHz. Digital Input: Within $\pm 0.05\%$ of set output frequency. Analog Input: Within 0.5% of maximum output frequency. Analog Output (PF 40): $\pm 2\%$ of full scale, 10-bit resolution. Open Loop with Slip Compensation: $\pm 2\%$ of base speed across a 40:1 speed range. (PF 40): 1% of base speed across a 60:1 speed range. Multiple programmable stop modes including - Ramp, Coast, DC-Brake, Ramp-to-Hold and S Curve. Two independently programmable accel and decel times. Each time may be programmed from 0...600 seconds in 0.1 second increments. 150% overload capability for up to 1 minute, 200% overload capability for up to 3 seconds. Provides class 10 motor overload protection according to NEC article 430 and motor over-temperature protection according to NEC article 430.126 (A) (2). UL 508C File 29572. |
| Electrical | Voltage Tolerance: Frequency Tolerance: Displacement Power Factor: Maximum Short Circuit Rating: | 120V, 200...240V, 380...480V, 460...600V: $\pm 10\%$ 48...63 Hz 0.98 across entire speed range 100,000 Amps symmetrical |

Parameter Descriptions

| Parameter Number | Parameter Name | Description | Factory Default |
|------------------------|------------------------------------|---|--|
| Display Group | | | |
| d001 | Output Freq | Output frequency present at T1, T2 & T3 (U, V & W) | Read Only |
| d002 | Commanded Freq | Value of the active frequency command | Read Only |
| d003 | Output Current | Output current present at T1, T2 & T3 (U, V & W) | Read Only |
| d004 | Output Voltage | Output voltage present at T1, T2 & T3 (U, V & W) | Read Only |
| d005 | DC Bus Voltage | Present DC bus voltage level | Read Only |
| d006 | Drive Status | Present operating condition of the drive | Read Only |
| d007...d009 | Fault x Code | A code that represents a drive fault | Read Only |
| d010 | Process Display | The output frequency scaled by parameter A099 [Process Factor] | Read Only |
| d012 | Control Source | Displays the source of the Start Command and Speed Reference | Read Only |
| d013 | Contrl In Status | Status of the control terminal block control inputs | Read Only |
| d014 | Dig In Status | Status of the control terminal block digital inputs | Read Only |
| d015 | Comm Status | Status of the communications ports | Read Only |
| d016 | Control SW Ver | Main Control Board software version | Read Only |
| d017 | Drive Type | Used by Rockwell Automation field service personnel | Read Only |
| d018 | Elapsed Run Time | Accumulated time drive is outputting power | Read Only |
| d019 | Testpoint Data | The present value of the function selected in parameter A102 [Testpoint Sel] | Read Only |
| d020 | Analog In 0-10V | The present value of the voltage at I/O Terminal 13 (100.0% = 10 volts) | Read Only |
| d021 | Analog In 4-20mA | The present value of the current at I/O Terminal 15 (0.0% = 4 mA, 100.0% = 20 mA) | Read Only |
| d022 | Output Power | Output power present at T1, T2 & T3 (U, V & W) | Read Only |
| d023 | Output Power Fctr | The angle in electrical degrees between motor voltage and motor current | Read Only |
| d024 | Drive Temp | Present operating temperature of the drive power section | Read Only |
| d025 | Counter Status | The current value of the counter when counter is enabled | Read Only |
| d026 | Timer Status | The current value of the timer when timer is enabled | Read Only |
| d028 | Stp Logic Status | When P038 [Speed Reference] is set to 6 "Stp Logic", this parameter will display the current step logic profile as defined by parameters A140...A147 [Stp Logic x] | Read Only |
| d029 | Torque Current | Displays the current value of the motor torque current as measured by the drive | Read Only |
| Basic Program Group | | | |
| P031 | Motor NP Volts | 20 to drive rated volts | Based on Drive Rating |
| P032 | Motor NP Hertz | 10 to 240 Hz | 60 Hz |
| | | 15 to 400 Hz | 60 Hz |
| P033 | Motor OL Current | 0.0 Amps to (Drive Rated Amps x 2) in units of 0.1 Amps | Based on Drive Rating |
| P034 | Minimum Freq | 0.0 to 240.0 Hz | 0.0 Hz |
| | | 0.0 to 400.0 Hz | 0.0 Hz |
| P035 | Maximum Freq | 0 to 240 Hz | 60 Hz |
| | | 0 to 400 Hz | 60 Hz |
| P036 | Start Source | 6 settings; Keypad, 3-Wire, 2-Wire, 2-Wire Level Sensitive, 2-Wire High Speed, Comm Port 7 settings; Keypad, 3-Wire, 2-Wire, 2-Wire Level Sensitive, 2-Wire High Speed, Comm Port, Momentary FWD/REV | Keypad Keypad |
| P037 | Stop Mode | 8 settings; Ramp-Clear Fault, Coast-Clear Fault, DC Brake-Clear Fault, DC Brake w/Shutoff-Clear Fault, Ramp, Coast, DC Brake, DC Brake w/Shutoff 10 settings; Ramp-Clear Fault, Coast-Clear Fault, DC Brake-Clear Fault, DC Brake w/Shutoff-Clear Fault, Ramp, Coast, DC Brake, DC Brake w/Shutoff, Ramp Stop w/EM Brake Control-Clear Fault, Ramp Stop w/EM Brake Control | Ramp, CF (Clear Fault) Ramp, CF (Clear Fault) |
| P038 | Speed Reference | 6 settings; Drive Potentiometer, Internal Freq, 0...10V Input/Remote Potentiometer, 4...20 mA Input, Preset Freq 0-3, Communications Port 8 settings; Drive Potentiometer, Internal Freq, 0...10V Input/Remote Potentiometer, 4...20 mA Input, Preset Freq 0-7, Communications Port, Step Logic, Analog In Mult | Drive Pot Drive Pot |
| P039 | Accel Time 1 | 0.0 to 600.0 seconds | 10.0 Secs |
| P040 | Decel Time 1 | 0.1 to 600.0 seconds | 10.0 Secs |
| P041 | Reset To Defaults | Used to reset drive to factory default settings | Ready/Idle |
| P042 | Voltage Class | Sets the voltage class of 600V drives, Low Voltage (460/480V) or High Voltage (575/600V) | High Voltage (575/600V) |
| P043 | Motor OL Ret | Enables/Disables the Motor Overload Retention function. | Disabled |
| Advanced Program Group | | | |
| A051 A052 | Digital In1 Sel Digital In2 Sel | 16 settings; Not Used, Accel 2 & Decel 2, Jog, Auxiliary Fault, Preset Frequencies, Local, Comm Port, Clear Fault, Ramp Stop Clear Fault, Coast Stop Clear Fault, DC Brake Clear Fault, Jog Forward, Jog Reverse, 10V In Control, 20 mA In Control, Analog Invert 28 settings; Not Used, Accel 2 & Decel 2, Jog, Auxiliary Fault, Preset Frequencies, Local, Comm Port, Clear Fault, Ramp Stop - Clear Fault, Coast Stop - Clear Fault, DC Brake - Clear Fault, Jog Forward, Jog Reverse, 10V In Control, 20 mA In Control, PID Disable, MOP Up, MOP Down, Timer Start, Counter In, Reset Timer, Reset Counter, Reset Timer and Counter, Logic In1, Logic In2, Current Limit2, Analog Invert, EM Brake Release | Preset Freq |
| A053 | Digital In3 Sel | 28 settings; Not Used, Accel 2 & Decel 2, Jog, Auxiliary Fault, Preset Frequencies, Local, Comm Port, Clear Fault, Ramp Stop - Clear Fault, Coast Stop - Clear Fault, DC Brake - Clear Fault, Jog Forward, Jog Reverse, 10V In Control, 20 mA In Control, PID Disable, MOP Up, MOP Down, Timer Start, Counter In, Reset Timer, Reset Counter, Reset Timer and Counter, Logic In1, Logic In2, Current Limit2, Analog Invert, EM Brake Release | Local |
| A054 | Digital In4 Sel | | Jog Forward |

Shaded areas are applicable to PowerFlex 40 only.

| Parameter Number | Parameter Name | Description | Factory Default |
|------------------|------------------|---|---------------------------------------|
| A055 | Relay Out Sel | 13 different settings for a variety of drive status conditions 24 different settings for a variety of drive status conditions | Ready/Fault Ready/Fault |
| A056 | Relay Out Level | 0.0 to 9999 | 0.0 |
| A058 | Opto Out1 Sel | 24 settings; Ready/Fault, At Frequency, Motor Running, Reverse, Motor Overload, Ramp Regulator, Above Frequency, Above Current, Above DC Voltage, Retries Exceeded, Above Analog Voltage, Logic In1, Logic In2, Logic 1 & 2, Logic 1 or 2, Step Logic Out, Timer Out, Counter Out, Above PF Angle, Analog Input Loss, Param Control, Non-Recoverable Fault, EM Brake Control, Above Frequency Command | MotorRunning |
| A059 | Opto Out1 Level | 0.0 to 9999 | 0.0 |
| A061 | Opto Out2 Sel | 24 settings; Ready/Fault, At Frequency, Motor Running, Reverse, Motor Overload, Ramp Regulator, Above Frequency, Above Current, Above DC Voltage, Retries Exceeded, Above Analog Voltage, Logic In1, Logic In2, Logic 1 & 2, Logic 1 or 2, Step Logic Out, Timer Out, Counter Out, Above PF Angle, Analog Input Loss, Param Control, Non-Recoverable Fault, EM Brake Control, Above Frequency Command | At Frequency |
| A062 | Opto Out2 Level | 0.0 to 9999 | 0.0 |
| A064 | Opto Out Logic | Determines the logic (NO or NC) of the opto outputs, 4 settings - NO/NO, NC/NO, NO/NC, NC/NC | NO/NO |
| A065 | Analog Out Sel | Sets the analog output signal mode, various settings | Output Freq 0...10, 0V=0Hz |
| A066 | Analog Out High | 0 to 800% | 100% |
| A067 | Accel Time 2 | 0.0 to 600.0 seconds | 20.0 Secs |
| A068 | Decel Time 2 | 0.1 to 600.0 seconds | 20.0 Secs |
| A069 | Internal Freq | 0.0 to 240.0 Hz | 60.0 Hz |
| | | 0.0 to 400.0 Hz | 60.0 Hz |
| A070 | Preset Freq 0 | 0.0 to 240.0 Hz | 0.0 Hz |
| | | 0.0 to 400.0 Hz | 0.0 Hz |
| A071 | Preset Freq 1 | 0.0 to 240.0 Hz | 5.0 Hz |
| | | 0.0 to 400.0 Hz | 5.0 Hz |
| A072 | Preset Freq 2 | 0.0 to 240.0 Hz | 10.0 Hz |
| | | 0.0 to 400.0 Hz | 10.0 Hz |
| A073 | Preset Freq 3 | 0.0 to 240.0 Hz | 20.0 Hz |
| | | 0.0 to 400.0 Hz | 20.0 Hz |
| A074 | Preset Freq 4 | 0.0 to 400.0 Hz | 30.0 Hz |
| A075 | Preset Freq 5 | 0.0 to 400.0 Hz | 40.0 Hz |
| A076 | Preset Freq 6 | 0.0 to 400.0 Hz | 50.0 Hz |
| A077 | Preset Freq 7 | 0.0 to 400.0 Hz | 60.0 Hz |
| A078 | Jog Frequency | 0.0 to (Value set in P035 [Maximum Freq]) | 10.0 Hz |
| A079 | Jog Accel/Decel | 0.1 to 600.0 seconds | 10.0 Secs |
| A080 | DC Brake Time | 0.0 to 90.0 seconds | 0.0 Secs |
| | | 0.0 to 99.9 seconds | 0.0 Secs |
| A081 | DC Brake Level | 0.0 to (Drive Rated Amps x 1.8) | Drive Rated Amps x 0.05 |
| A082 | DB Resistor Sel | Used to set percent duty cycle for external dynamic braking | Disabled |
| A083 | S Curve % | 0 to 100% | 0% (Disabled) |
| A084 | Boost Select | 14 boost settings (in % of P031 [Motor NP Volts]), redefines the Volts per Hertz curve | 5.0 (2.5 for 5 HP drives) |
| | | 15 boost settings (in % of P031 [Motor NP Volts]), redefines the Volts per Hertz curve | 5.0, CT (2.5 CT for 5...15 HP drives) |
| A085 | Start Boost | 0.0 to 25.0% | 2.5% |
| A086 | Break Voltage | 0.0 to 100.0% | 25.0% |
| A087 | Break Frequency | 0.0 to 400.0 Hz | 15.0 Hz |
| A088 | Maximum Voltage | 20 to Drive Rated Volts | Drive Rated Volts |
| A089 | Current Limit 1 | 0.1 to (Drive Rated Amps x 1.8) | Drive Rated Amps x 1.5 |
| A090 | Motor OL Select | 3 settings; No Derate, Minimum Derate, Maximum Derate | No Derate |
| A091 | PWM Frequency | 2.0 to 16.0 kHz | 4.0 kHz |
| A092 | Auto Rstrt Tries | 0 to 9 | 0 |
| A093 | Auto Rstrt Delay | 0.0 to 300.0 seconds | 1.0 Secs |
| A094 | Start At PowerUp | 2 settings; Disabled, Enabled | Disabled |
| A095 | Reverse Disable | 2 settings; Reverse Enabled, Reverse Disabled | Rev Enabled |


Shaded areas are applicable to PowerFlex 40 only.

| Parameter Number | Parameter Name | Description | Factory Default |
|-----------------------------------|--------------------|---|------------------------|
| Advanced Program Group, Continued | | | |
| A096 | Flying Start En | 2 settings; Disabled, Enabled | Disabled |
| A097 | Compensation | 4 settings; Disabled, Electrical, Mechanical, Both | Electrical |
| A098 | SW Current Trip | Software instantaneous trip, 0.0 to (Drive Rated Amps x 2) | 0.0 (Disabled) |
| A099 | Process Factor | 0.1 to 999.9 | 30.0 |
| A100 | Fault Clear | Resets a fault and clears the fault queue | Ready/Idle |
| A101 | Program Lock | Protects parameters against change by unauthorized personnel | Unlocked |
| A102 | Testpoint Sel | Used by Rockwell Automation field service personnel | 400 |
| A103 | Comm Data Rate | 6 settings; 1200, 2400, 4800, 9600, 19.2K, 38.4K | 9600 |
| A104 | Comm Node Addr | 1 to 247 | 100 |
| A105 | Comm Loss Action | 4 settings; Fault, Coast to Stop, Stop, Continue Last Speed | Fault |
| A106 | Comm Loss Time | 0.1 to 60.0 seconds | 5.0 Secs |
| A107 | Comm Format | 6 settings; RTU 8-N-1, RTU 8-E-1, RTU 8-0-1, RTU 8-N-2, RTU 8-E-2, RTU 8-0-2 | RTU 8-N-1 |
| A108 | Language | 10 settings; English, Francais, Espanol, Italiano, Deutsch, Reserved, Portugues, Reserved, Reserved, Nederlands | English |
| A109 | Anlg Out Setpt | 0.0/100.0% | 100.0% |
| A110 | Anlg In 0-10V Lo | 0.0 to 100.0% | 0.0% |
| A111 | Anlg In 0-10V Hi | 0.0 to 100.0% | 100.0% |
| A112 | Anlg In4-20mA Lo | 0.0 to 100.0% | 0.0% |
| A113 | Anlg In4-20mA Hi | 0.0 to 100.0% | 100.0% |
| A114 | Slip Hertz @ FLA | 0.0 to 10.0 Hz | 2.0 Hz |
| A115 | Process Time Lo | 0.00 to 99.99 | 0.00 |
| A116 | Process Time Hi | 0.00 to 99.99 | 0.00 |
| A117 | Bus Reg Mode | 0/1 | Enabled |
| A118 | Current Limit 2 | 0.1 to (Drive Rated Amps x 1.8) | Drive Rated Amps x 1.5 |
| A119 | Skip Frequency | 0 to 400 Hz | 0 Hz |
| A120 | Skip Freq Band | 0.0 to 30.0 Hz | 0.0 Hz |
| A121 | Stall Fault Time | 6 settings; 60 Seconds, 120 Seconds, 240 Seconds, 360 Seconds, 480 Seconds, Fit Disabled | 60 Seconds |
| A122 | Analog In Loss | 7 settings; Disabled, Fault (F29), Stop, Zero Ref, Min Freq Ref, Max Freq Ref, Int Freq Ref | Disabled |
| A123 | 10V Bipolar Enbl | 2 settings; Uni-Polar In, Bi-Polar In | Uni-Polar In |
| A124 | Var PWM Disable | 2 settings; Enabled, Disabled | Enabled |
| A125 | Torque Perf Mode | 2 settings; V/Hz, Sensorless Vector | Sensrls Vect |
| A126 | Motor NP FLA | Drive Rated Amps x 0.1/2 | Drive Rated Amps |
| A127 | Autotune | 3 settings; Ready/Idle, Static Tune, Rotate Tune | Ready/Idle |
| A128 | IR Voltage Drop | 0.0 to 230.0 VAC | Based on Drive Rating |
| A129 | Flux Current Ref | 0.00 to Motor NP FLA | Based on Drive Rating |
| A130 | PID Trim Hi | 0.0 to 400.0 | 60.0 |
| A131 | PID Trim Lo | 0.0 to 400.0 | 0.0 |
| A132 | PID Ref Sel | 9 settings; PID Disabled, PID Setpoint, 0...10V Input, 4...20 mA Input, Comm Port, Setpoint - Trim, 0...10V - Trim, 4...20 mA - Trim, Comm - Trim | PID Disabled |
| A133 | PID Feedback Sel | 3 settings; 0...10V Input, 4...20 mA Input, Comm Port | 0...10V Input |
| A134 | PID Prop Gain | 0.00 to 99.99 | 0.01 |
| A135 | PID Integ Time | 0.0 to 999.9 Seconds | 0.1 Secs |
| A136 | PID Diff Rate | 0.00 to 99.99 (1/Secs) | 0.01 (1/Secs) |
| A137 | PID Setpoint | 0.0 to 100.0% | 0.0% |
| A138 | PID Deadband | 0.0 to 10.0% | 0.0% |
| A139 | PID Preload | 0.0 to 400.0 Hz | 0.0 Hz |
| A140...A147 | Stp Logic 0-7 | 0001 to bAFF | 00F1 |
| A150...A157 | Stp Logic Time 0-7 | 0.0 to 999.9 Seconds | 30.0 Secs |
| A160 | EM Brk Off Delay | 0.01/10.00 Secs | 2.00 Secs |
| A161 | EM Brk On Delay | 0.01/10.00 Secs | 2.00 Secs |
| A162 | MOP Reset Sel | 2 settings; Zero MOP Ref, Save MOP Ref | Save MOP Ref |
| A163 | DB Threshold | 0.0 to 110.0% | 100.0% |
| A164 | Comm Write Mode | 2 settings; Save, RAM Only | Save |
| A165 | Anlg Loss Delay | 0.0 to 20.0 Secs | 0.0 Secs |
| A166 | Analog In Filter | 0 to 14 | 0 |

Shaded areas are applicable to PowerFlex 40 only.

Product Dimensions

Approximate Dimensions

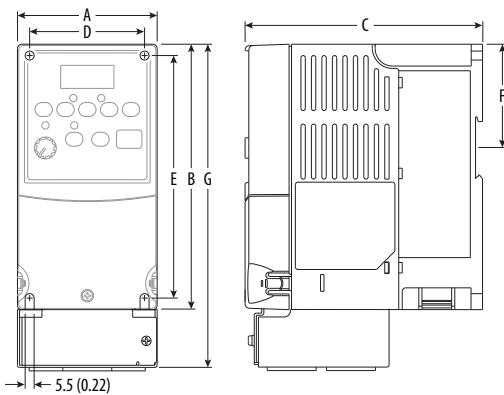

Dimensions are in millimeters and (inches). Weights are in kilograms and (pounds).

| Frame | A | B ⁽¹⁾ | C | D | E | F | G ⁽²⁾ | Shipping Weight |
|-------|------------|------------------|------------|------------|------------|-------------|------------------|-----------------|
| A | 80 (3.15) | 152 (5.98) | 136 (5.35) | 67 (2.64) | 140 (5.51) | 59.3 (2.33) | 185 (7.28) | 1.4 (3.1) |
| B | 100 (3.94) | 180 (7.09) | 136 (5.35) | 87 (3.43) | 168 (6.61) | 87.4 (3.44) | 213 (8.39) | 2.2 (4.9) |
| C | 130 (5.1) | 260 (10.2) | 180 (7.1) | 116 (4.57) | 246 (9.7) | — | 320 (12.6) | 4.3 (9.5) |

(1) Overall height of standard IP 20/Open Type Drive.

(2) Overall height of drive with IP 30/NEMA 1/UL Type 1 option kit installed.


Ratings are in kW and (HP).

| PowerFlex 4 — Frame | 120V AC – 1-Phase | 240V AC – 1-Phase | 240V AC – 3-Phase | 480V AC – 3-Phase |
|---------------------|-------------------|-------------------|-------------------|-------------------|
| A | 0.2 (0.25) | 0.2 (0.25) | 0.2 (0.25) | 0.4 (0.5) |
| | 0.4(0.5) | 0.4 (0.5) | 0.4 (0.5) | 0.75 (1.0) |
| | | 0.75 (1.0) | 0.75 (1.0) | 1.5 (2.0) |
| | | | 1.5 (2.0) | |
| B | 0.75 (1.0) | 1.5 (2.0) | 2.2 (3.0) | 2.2 (3.0) |
| | 1.1 (1.5) | | 3.7 (5.0) | 3.7 (5.0) |


| PowerFlex 40 — Frame | 120V AC – 1-Phase | 240V AC – 1-Phase | 240V AC – 3-Phase | 480V AC – 3-Phase | 600V AC – 3-Phase |
|----------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| B | 0.4 (0.5) | 0.4 (0.5) | 0.4 (0.5) | 0.4 (0.5) | 0.75 (1.0) |
| | 0.75 (1.0) | 0.75 (1.0) | 0.75 (1.0) | 0.75 (1.0) | 1.5 (2.0) |
| | 1.1 (1.5) | 1.5 (2.0) | 1.5 (2.0) | 1.5 (2.0) | 2.2 (3.0) |
| | | | 2.2 (3.0) | 2.2 (3.0) | 4.0 (5.0) |
| | | | 3.7 (5.0) | 4.0 (5.0) | |
| C | | 2.2 (3.0) | 5.5 (7.5) | 5.5 (7.5) | 5.5 (7.5) |
| | | | 7.5 (10.0) | 7.5 (10.0) | 7.5 (10.0) |
| | | | | 11.0 (15.0) | 11.0 (15.0) |

Shaded areas are applicable to PowerFlex 40 only.

Flange Mount Drive

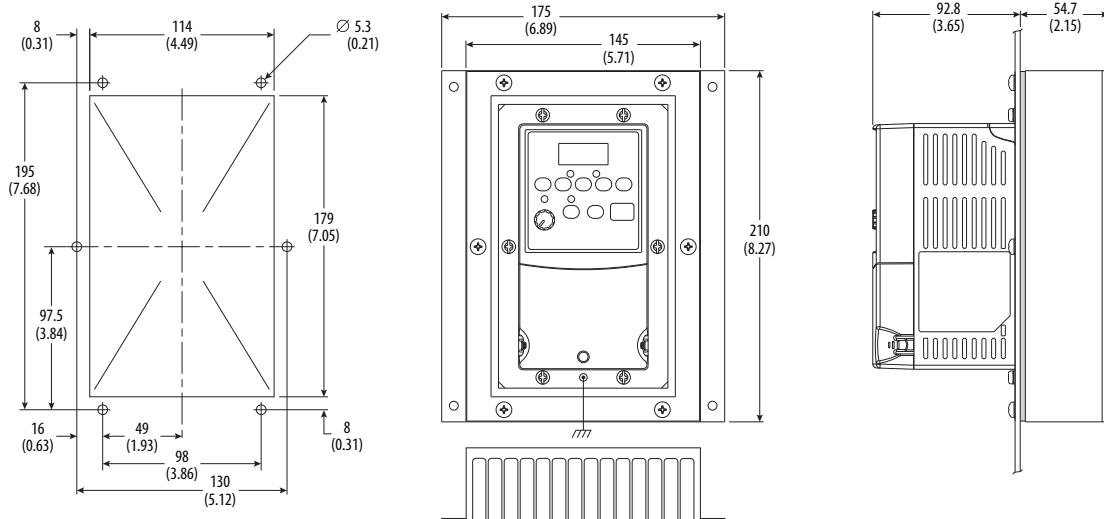


Frame A — PowerFlex 4 only

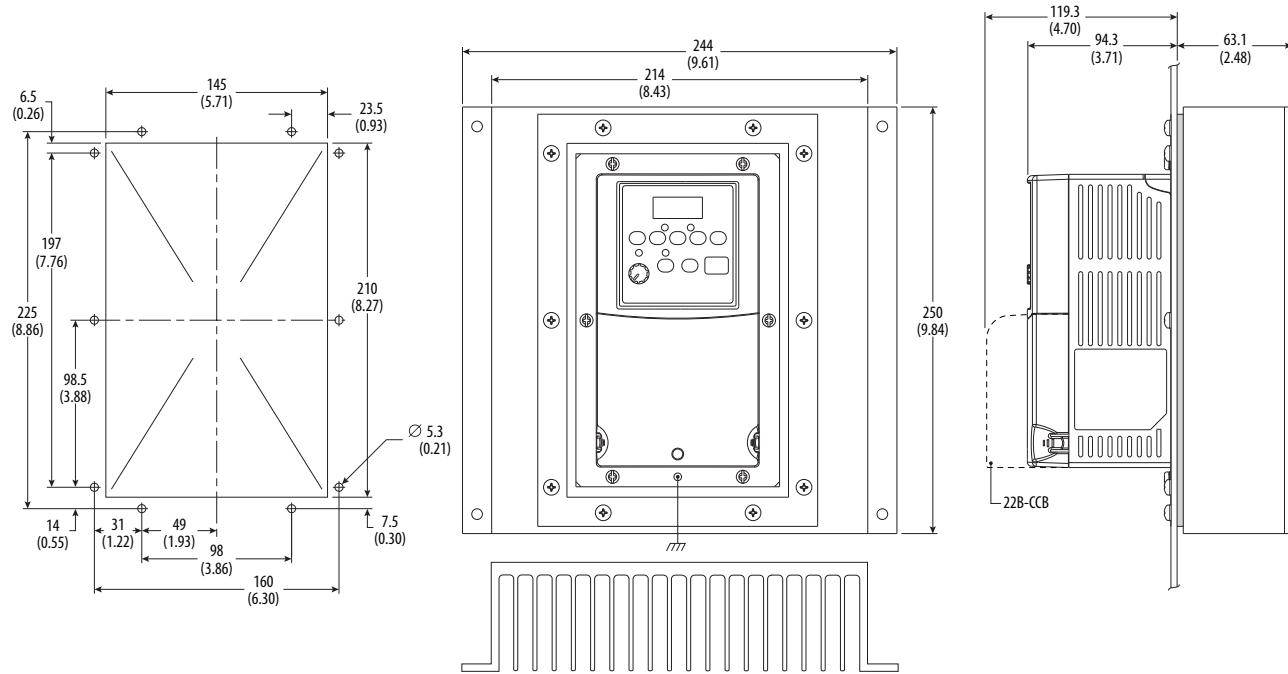


Frame B — PowerFlex 4 and PowerFlex 40

Flange Mount Drive *Continued*

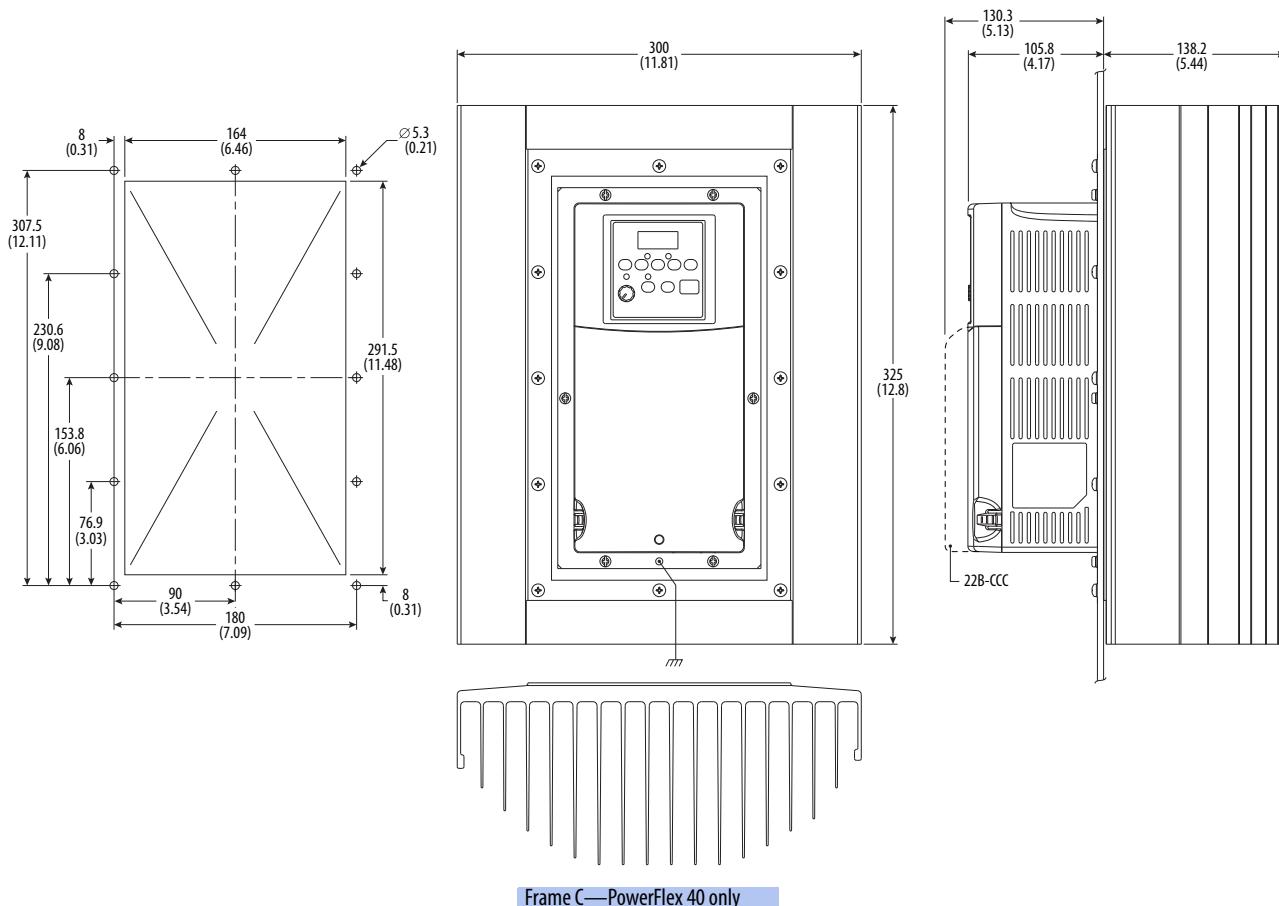


IP 66, NEMA/UL Type 4X/12

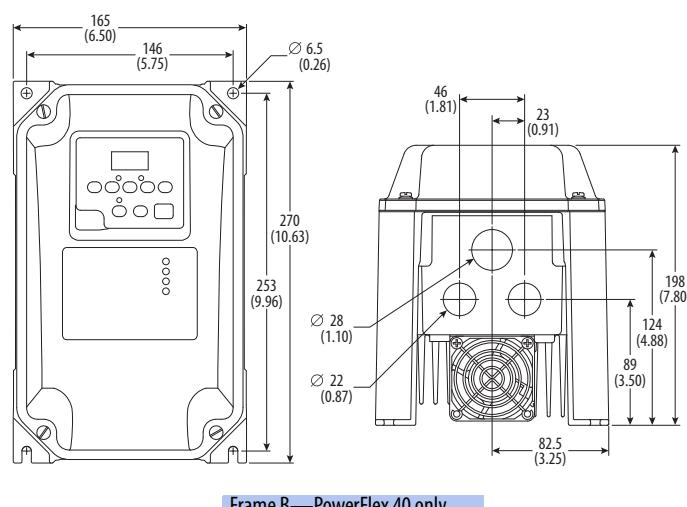


Shaded areas are applicable to PowerFlex 40 only.

IP 30, NEMA/UL Type 1 Option Kit without Communication Options


PowerFlex 4 uses Frames A and B. PowerFlex 40 uses Frames B and C.

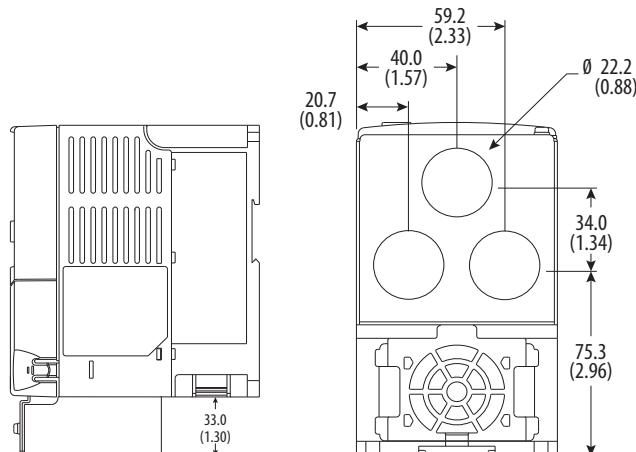

Frame A — 22-JBAA

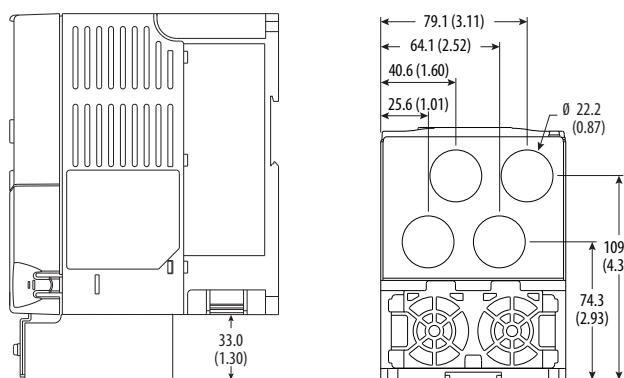


Frame B — 22-JBAB

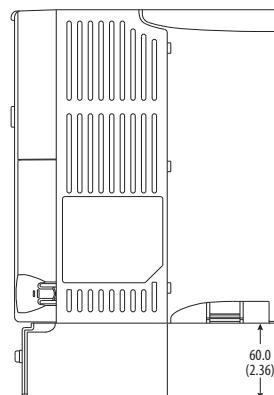


Frame C — 22-JBAC


PowerFlex 40 IP 30/NEMA 1/UL Type 1 Option Kit with Communication Option

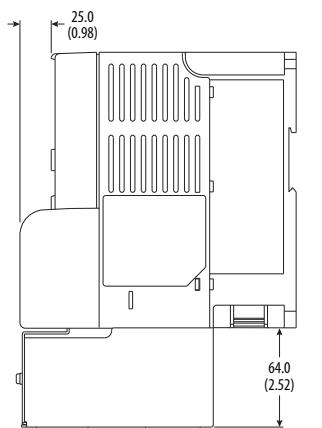

Frame B — 22-JBCB

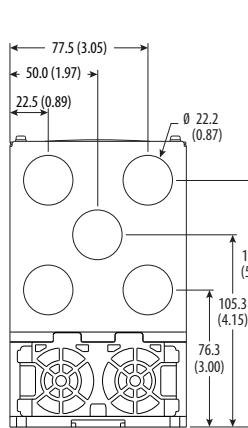


Frame C — 22-JBCC

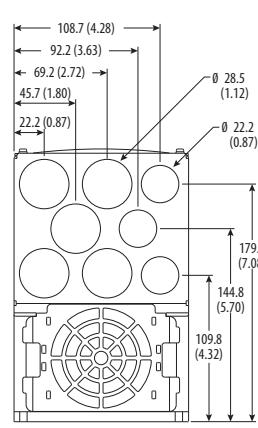

Shaded areas are applicable to PowerFlex 40 only.


Dynamic Brake Resistors

Dimensions are in millimeters and (inches)

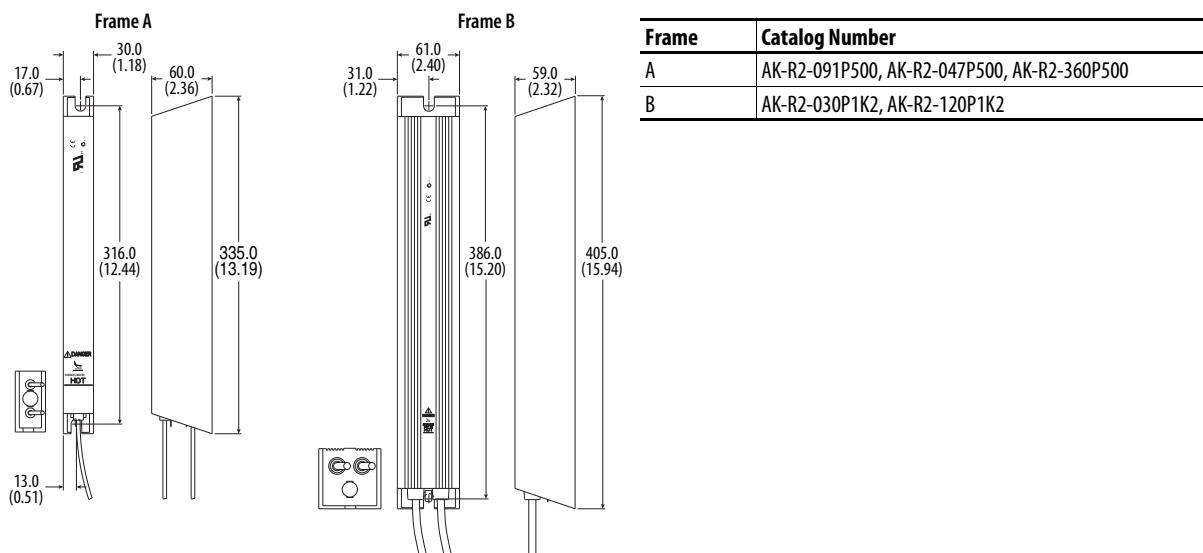

Bulletin 1321-3R Series Line Reactors


Dimensions are in millimeters and (inches). Weights are in kilograms and (pounds).

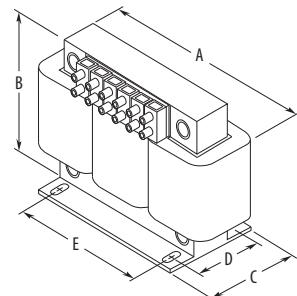


| Catalog Number | A | B | C | D | E | Weight |
|----------------|------------|------------|-----------|-----------|-----------|----------|
| 1321-3R2-A | 112 (4.40) | 104 (4.10) | 70 (2.75) | 50 (1.98) | 37 (1.44) | 1.8 (4) |
| 1321-3R2-B | 112 (4.40) | 104 (4.10) | 70 (2.75) | 50 (1.98) | 37 (1.44) | 1.8 (4) |
| 1321-3R4-A | 112 (4.40) | 104 (4.10) | 76 (3.00) | 50 (1.98) | 37 (1.44) | 1.8 (4) |
| 1321-3R4-B | 112 (4.40) | 104 (4.10) | 76 (3.00) | 50 (1.98) | 37 (1.44) | 1.8 (4) |
| 1321-3R4-C | 112 (4.40) | 104 (4.10) | 86 (3.38) | 60 (2.35) | 37 (1.44) | 2.3 (5) |
| 1321-3R8-A | 152 (6.00) | 127 (5.00) | 76 (3.00) | 53 (2.10) | 51 (2.00) | 3.1 (7) |
| 1321-3R8-B | 152 (6.00) | 127 (5.00) | 76 (3.00) | 53 (2.10) | 51 (2.00) | 3.6 (8) |
| 1321-3R8-C | 152 (6.00) | 127 (5.00) | 85 (3.35) | 63 (2.48) | 51 (2.00) | 4.9 (11) |
| 1321-3R12-A | 152 (6.00) | 127 (5.00) | 76 (3.00) | 53 (2.10) | 51 (2.00) | 4.1 (9) |
| 1321-3R12-B | 152 (6.00) | 127 (5.00) | 76 (3.00) | 53 (2.10) | 51 (2.00) | 4.5 (10) |
| 1321-3R18-A | 152 (6.00) | 133 (5.25) | 79 (3.10) | 54 (2.13) | 51 (2.00) | 4.1 (9) |
| 1321-3R18-B | 152 (6.00) | 133 (5.25) | 86 (3.40) | 63 (2.48) | 51 (2.00) | 5.4 (12) |
| 1321-3R25-A | 183 (7.20) | 146 (5.76) | 85 (3.35) | 60 (2.35) | 76 (3.00) | 4.9 (11) |
| 1321-3R35-A | 193 (7.60) | 146 (5.76) | 91 (3.60) | 66 (2.60) | 76 (3.00) | 6.3 (14) |

EMC Line Filters


Frame A EMC Line Filters – Dimensions are in millimeters and (inches)
 Catalog Numbers: 22-RF5P7-AS, -AL; 22-RF9P5-AS, -AL; 22-RF010-AL

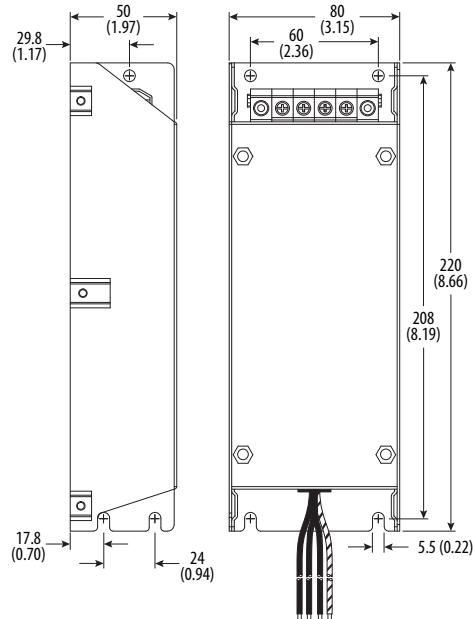

Frame B EMC Line Filters – Dimensions are in millimeters and (inches)
 Catalog Numbers: 22-RF8P0-BL, 22-RF012-BS, -BL; 22-RF018-BL;
 22-RF021-BS, -BL

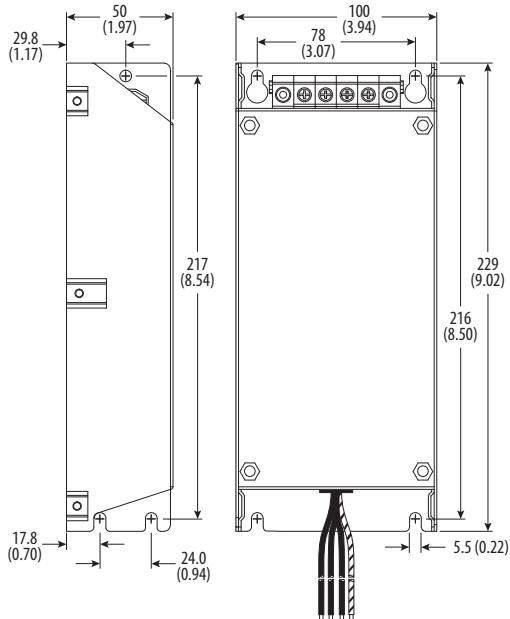


Frame C EMC Line Filters – Dimensions are in millimeters and (inches)
 Catalog Numbers: 22-RF015-CL; 22-RF018-CS, -CL; 22-RF024-CL; 22-RF025-CL; 22-RF026-CS, -CL; 22-RF034-CS, -CL



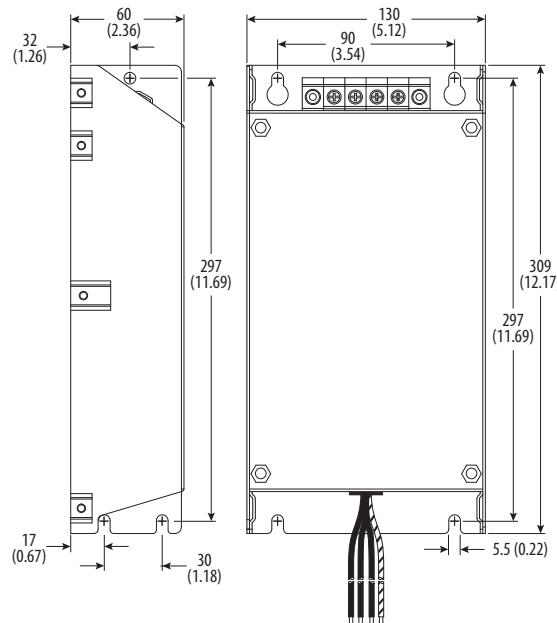


Human Interface Module (HIM) Dimensions

NEMA Type 1 Bezel – Dimensions are in millimeters and (inches)
Catalog Number: 22-HIM-B1

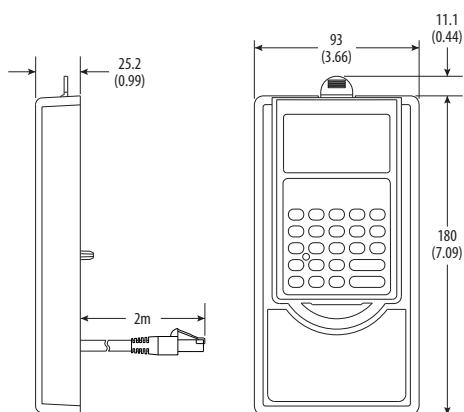

NEMA Type 4X/12 Remote (Panel Mount) HIM
– Dimensions are in millimeters and (inches)
Catalog Number: 22-HIM-C2S

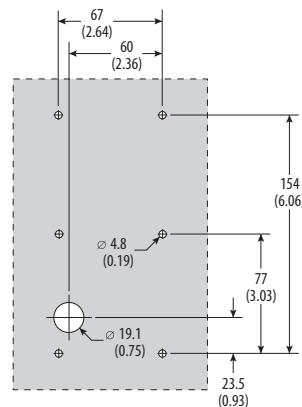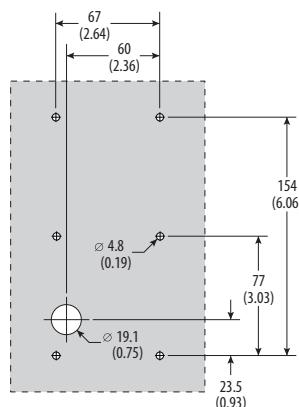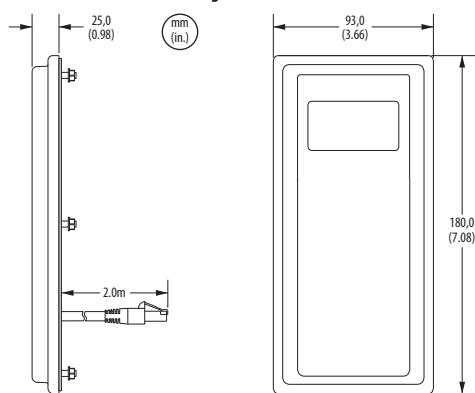

PowerFlex 4 and 40 Configured Drives

The heart of every Configured Drive is an Allen-Bradley standard drive. These world class products help to provide a single solution for virtually all of your motor speed control requirements.

Configured Drive programs provide you with an offering of factory mounted options enhancing the Standard Drive program. The options defined within the programs are pre-engineered for consistency of design. This translates to time and money savings in set-up, integration and maintenance of your automation systems.

Catalog Number Explanation

| 1-3 | 4 | 5 | 6-8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16+ | | | | | | | | | | | |
|---|---|----------------|------------|----------|----------|----------|----------|----------|----------|----|-----------|--|--|--|--|--|--|--|--|--|--|--|
| 23B | - | D | 4P0 | D | 1 | 0 | 4 | N | N | - | P6 | | | | | | | | | | | |
| <i>a</i> | | <i>b</i> | | <i>d</i> | <i>e</i> | <i>f</i> | <i>g</i> | <i>h</i> | <i>i</i> | | <i>j</i> | | | | | | | | | | | |
| <i>a</i> | | | | | | | | | | | | | | | | | | | | | | |
| Drive | | | | | | | | | | | | | | | | | | | | | | |
| Code | Type | | | | | | | | | | | | | | | | | | | | | |
| 23B | PowerFlex 40 | | | | | | | | | | | | | | | | | | | | | |
| <i>b</i> | | | | | | | | | | | | | | | | | | | | | | |
| Voltage Rating | | | | | | | | | | | | | | | | | | | | | | |
| Code | Voltage | Ph. | | | | | | | | | | | | | | | | | | | | |
| D | 480V ac | 3 | | | | | | | | | | | | | | | | | | | | |
| <i>c</i> | | | | | | | | | | | | | | | | | | | | | | |
| Amp Rating | | | | | | | | | | | | | | | | | | | | | | |
| 480V 60Hz Input | | | | | | | | | | | | | | | | | | | | | | |
| Code | Amps | kW (Hp) | | | | | | | | | | | | | | | | | | | | |
| 1P4 | 1.4 | 0.4 (0.5) | | | | | | | | | | | | | | | | | | | | |
| 2P3 | 2.3 | 0.75 (1.0) | | | | | | | | | | | | | | | | | | | | |
| 4P0 | 4.0 | 1.5 (2.0) | | | | | | | | | | | | | | | | | | | | |
| 6P0 | 6.0 | 2.2 (3.0) | | | | | | | | | | | | | | | | | | | | |
| 010 | 10.5 | 4.0 (5.0) | | | | | | | | | | | | | | | | | | | | |
| 012 | 12 | 5.5 (7.5) | | | | | | | | | | | | | | | | | | | | |
| 017 | 17 | 7.5 (10) | | | | | | | | | | | | | | | | | | | | |
| 024 | 24 | 11 (15) | | | | | | | | | | | | | | | | | | | | |
| <i>d</i> | | | | | | | | | | | | | | | | | | | | | | |
| Enclosure | | | | | | | | | | | | | | | | | | | | | | |
| Code | Enclosure | | | | | | | | | | | | | | | | | | | | | |
| C | NEMA/UL Type 4X \ddagger | | | | | | | | | | | | | | | | | | | | | |
| D | NEMA/UL Type 4 \ddagger | | | | | | | | | | | | | | | | | | | | | |
| \ddagger The design of the PowerFlex 40 Standard Configured Drive supports indoor and outdoor applications that are not in direct sunlight. | | | | | | | | | | | | | | | | | | | | | | |
| <i>e</i> | | | | | | | | | | | | | | | | | | | | | | |
| HIM | | | | | | | | | | | | | | | | | | | | | | |
| Code | Interface Module | | | | | | | | | | | | | | | | | | | | | |
| 1 | Fixed Keypad on Drive | | | | | | | | | | | | | | | | | | | | | |
| F \ddagger | Fixed Keypad on Drive and LCD Display with Digital Speed Control HIM on Enclosure Door (22-HIM-C2S) | | | | | | | | | | | | | | | | | | | | | |
| * This option changes the enclosure rating to indoor only. | | | | | | | | | | | | | | | | | | | | | | |
| <i>f</i> | | | | | | | | | | | | | | | | | | | | | | |
| Emission Class | | | | | | | | | | | | | | | | | | | | | | |
| Code | Rating | | | | | | | | | | | | | | | | | | | | | |
| 0 | Not Filtered | | | | | | | | | | | | | | | | | | | | | |
| <i>g</i> | | | | | | | | | | | | | | | | | | | | | | |
| Version | | | | | | | | | | | | | | | | | | | | | | |
| Code | Version | | | | | | | | | | | | | | | | | | | | | |
| 4 | RS485 (Standard) | | | | | | | | | | | | | | | | | | | | | |
| C | ControlNet | | | | | | | | | | | | | | | | | | | | | |
| D | DeviceNet | | | | | | | | | | | | | | | | | | | | | |
| E | EtherNet/IP | | | | | | | | | | | | | | | | | | | | | |
| P | PROFIBUS DP | | | | | | | | | | | | | | | | | | | | | |
| <i>h</i> | | | | | | | | | | | | | | | | | | | | | | |
| Rating | | | | | | | | | | | | | | | | | | | | | | |
| Code | Rating | | | | | | | | | | | | | | | | | | | | | |
| N | Reserved | | | | | | | | | | | | | | | | | | | | | |
| <i>i</i> | | | | | | | | | | | | | | | | | | | | | | |
| Rating | | | | | | | | | | | | | | | | | | | | | | |
| Code | Rating | | | | | | | | | | | | | | | | | | | | | |
| N | Reserved | | | | | | | | | | | | | | | | | | | | | |
| <i>j</i> | | | | | | | | | | | | | | | | | | | | | | |
| Options | | | | | | | | | | | | | | | | | | | | | | |
| Code | Description | | | | | | | | | | | | | | | | | | | | | |
| -E22 | DeviceNet Quick Disconnect (Bottom) | | | | | | | | | | | | | | | | | | | | | |
| -E23 | DeviceNet Quick Disconnect (Left Side) | | | | | | | | | | | | | | | | | | | | | |
| -P3 | Motor Circuit Protector | | | | | | | | | | | | | | | | | | | | | |
| -P3T | Motor Circuit Protector (Customer wiring into top of device) | | | | | | | | | | | | | | | | | | | | | |
| -P6 | Disconnect Switch - Fused | | | | | | | | | | | | | | | | | | | | | |
| -P6T | Disconnect Switch - Fused (Customer wiring into top of device) | | | | | | | | | | | | | | | | | | | | | |
| -R3 | DeviceNet I/O (4 In/2 Out) w/Spring Return HOA and Power Disconnect Aux. Contact | | | | | | | | | | | | | | | | | | | | | |
| -R4 | DeviceNet Point I/O w/IB4 (4 Inputs) | | | | | | | | | | | | | | | | | | | | | |
| -R5 | -R3 plus 4 I/O Quick Disconnects and (1) 24V DC Receptacle | | | | | | | | | | | | | | | | | | | | | |
| -S1 | Hand/Off/Auto S.S. (Start/Stop/Speed Ref.) | | | | | | | | | | | | | | | | | | | | | |
| -S4 | Auto/Manual S.S. (Speed Ref.) | | | | | | | | | | | | | | | | | | | | | |
| -S7 | Start and Stop P.B. | | | | | | | | | | | | | | | | | | | | | |
| -S8 | Forward/Reverse S.S. | | | | | | | | | | | | | | | | | | | | | |
| -S18 | Door Mounted Local Speed Pot (1-Turn) | | | | | | | | | | | | | | | | | | | | | |
| -S20 | Local/Remote and Local Control Off/Run Forward Selector Switches | | | | | | | | | | | | | | | | | | | | | |
| -S21 | Local/Off/Remote with 1 N.O. Interposing Relay | | | | | | | | | | | | | | | | | | | | | |
| -S22 | Spring Return Hand/Off Auto S.S. (Start/Stop/Speed Ref.) | | | | | | | | | | | | | | | | | | | | | |
| -S23 | Clear Fault P.B. | | | | | | | | | | | | | | | | | | | | | |

Product Description

PowerFlex 40 Configured AC drives are ideal for OEM's and end-users with special installation needs. Designed to meet your customer demand for space savings, applications flexibility and reliability, the PowerFlex 40 Configured AC drive options have been pre-engineered to ensure superior reliability.

Standard Features

- This package integrates the PowerFlex 40 Standard Drive as the base power/control component.
- Enclosure features include...
 - NEMA Type 4/12 and 4X (IP66) indoor and outdoor applications⁽¹⁾
 - Heat out the back design reduces enclosure size
 - Viewing window-drive display and all indicators are visible.
 - Mounting feet-orientation is adjustable per customer requirements
- The drive can be removed from the front of the enclosure for ease of assembly or repair.
- Low cost, highly configurable I/O inputs and/or 0...10V/4...20 mA outputs that are not used by program standard features and options are available for customer use.

⁽¹⁾ Supports indoor and outdoor applications other than direct sunlight.

Program Options

- Communication Options
 - ControlNet
 - DeviceNet
 - EtherNet/IP
 - LonWorks
 - PROFIBUS DP
- Power Disconnect Options
 - Drive Input Fused Disconnect Switch – 200kA short circuit withstand rating
 - Motor Circuit Protector – 65kA short circuit withstand rating
- Door Mounted Operator Devices
 - Hand/Off/Auto Selector Switch
 - Auto/Manual Selector Switch
 - Start and Stop Pushbuttons
 - Forward/Reverse Selector Switch
 - Local Control Off/Run Forward and Local/Remote – Selector Switches
 - Local/Off/Remote Selector Switch with One – Normally Open Interposing Relay–(Panel)
 - Clear Fault Push button
- Quick Disconnect
 - DeviceNet Quick Disconnect–Bottom or left side mounted
- I/O Options
 - DeviceNet I/O with Hand/Off auto selector switch and power disconnect auxiliary contact. (4 in / 2 out) I/O quick disconnect optional.
 - DeviceNet Point I/O with IB4 (4 in)

For option specific detail, refer to the PowerFlex 40 Adjustable Frequency AC Configured Drives Installation Instructions, publication [23B-JN001](#).

Drive Ratings — PowerFlex 40 Configured Drives

| Catalog Number | kW (HP) | Input Ratings | | Output Ratings | |
|----------------|-------------|---------------|------|----------------|------|
| | | Voltage | Amps | Voltage | Amps |
| 23B-D1P4 | 0.4 (0.5) | 480 | 1.8 | 460 | 1.4 |
| 23B-D2P3 | 0.75 (1.0) | 480 | 3.2 | 460 | 2.3 |
| 23B-D4P0 | 1.5 (2.0) | 480 | 5.7 | 460 | 4.0 |
| 23B-D6P0 | 2.2 (3.0) | 480 | 7.5 | 460 | 6.0 |
| 23B-D010 | 4.0 (5.0) | 480 | 13.0 | 460 | 10.5 |
| 23B-D012 | 5.5 (7.5) | 480 | 14.2 | 460 | 12.0 |
| 23B-D017 | 7.5 (10.0) | 480 | 18.4 | 460 | 17.0 |
| 23B-D024 | 11.0 (15.0) | 480 | 26.0 | 460 | 24.0 |

Specifications for Configured Drive Products


| | | |
|-------------------------------------|---|--|
| Input/Output Ratings | Output Frequency: Efficiency: | 0...400 Hz (Programmable) 97.5% (Typical) |
| Approvals | UL508C cUL CSA C 22.2 No. 14 | EN 61800-3 CE LV Directive 73/23/EEC LV: EN 50170; EN 60204 EMC Directive 89/336/EEC EMC: EN 61800-3 |
| Fuses and Power Disconnecting Means | 140M Motor Circuit Protector: 194R Fused Disconnect: | Provides branch circuit protection, 65 kA short circuit withstand Provides branch circuit protection, 200 kA short circuit withstand, Class J fuses |
| Protective Features | Over Voltage: Under Voltage: | 480V AC Input – Trip occurs at 810V DC bus voltage (equivalent to 575V AC incoming line) 480V AC Input – Trip occurs at 390V DC bus voltage (equivalent to 275V AC incoming line) |
| Environment | Ambient Operating Temperature: Cooling Method: | NEMA 4/12, 4X (IP66), -10 to 40 degrees C (14 to 104 degrees F) ⁽¹⁾ Fan, all drive ratings |
| Control | Carrier Frequency: | 2...4 kHz. Drive rating and heat calculations are based on 4 kHz. |



(1) The design of the PowerFlex 40 Configured Drive supports indoor and outdoor applications that are not in direct sunlight.

Specifications for Standard PowerFlex 40 Drives

| | | |
|--|--|--|
| Electrical | Voltage Tolerance: Frequency Tolerance: Displacement Power Factor: Maximum Short Circuit Rating: | 120V, 200...240V, 380...480V, 460...600V: $\pm 10\%$ 48...63 Hz 0.98 across entire speed range 100,000 Amps symmetrical |
| Control Inputs | Digital SRC (Source) Mode: SNK (Sink) Mode: Analog 4...20 mA Analog: 0...10V DC Analog: External Pot: | Input Current = 6 mA 18...24V = On, 0...6V = Off 0...6V = On, 18...24V = Off 250 ohm input impedance 100k ohm input impedance 1...10k ohms, 2 Watt minimum |
| Control Output – Programmable Outputs (form C relay) | Resistive Rating Opto Outputs: Analog Outputs: Inductive Rating Opto Outputs: Analog Outputs: | 3.0A at 30V DC, 3.0A at 125V AC, 3.0A at 240V AC 30V DC, 50 mA 10-bit, 0...10V, 1k ohm minimum 0.5A at 30V DC, 0.5A at 125V AC, 0.5A at 240V AC Non-inductive 10 bit, 4...20 mA, 525 ohm maximum |
| Fuses and Circuit Breakers | Recommended Fuse Type: Recommended Circuit Breakers: | UL Class J, CC, T or Type BS88; 600V (550V) or equivalent. HMCP circuit breaker or equivalent. |
| Protective Features | Motor Protection: Overcurrent: Control Ride Through: Faultless Power Ride Through: | I^2t Overload Protection, 150% for 60 sec., 200% for 3 sec. (provides Class 10 protection) 200% hardware limit, 300% instantaneous fault Minimum Ride Through is 0.5 sec. - typical value is 2 seconds 100 milliseconds |
| Dynamic Braking | Internal brake IGBT included with all ratings. | |
| Environment | Altitude: Storage Temperature: Atmosphere: Relative Humidity: Shock (operating): Vibration (operating): | 1000 m (3300 ft.) maximum without derating -40 to 85 degrees C (-40 to 185 degrees F) Important: Drive <u>must</u> not be installed in an area where the ambient atmosphere contains volatile or corrosive gas, vapors or dust. If the drive is not going to be installed for a period of time, it must be stored in an area where it will not be exposed to a corrosive atmosphere. 0 to 95% non-condensing 15G peak for 11ms duration ($\pm 1.0ms$) 1G peak, 5 to 2000 Hz |
| Control | Frequency Accuracy: Speed Regulation: Stop Modes: Accel/Decel: Intermittent Overload: Electronic Motor Overload Protection: | Digital Input: Within $\pm 0.05\%$ of set output frequency. Analog Input: Within 0.5% of maximum output frequency. Analog Output: $\pm 2\%$ of full scale, 10-bit resolution. Open Loop with Slip Compensation: $\pm 2\%$ of base speed across a 40:1 speed range. 1% of base speed across a 60:1 speed range. Multiple programmable stop modes including - Ramp, Coast, DC-Brake, Ramp-to-Hold and S Curve. Two independently programmable accel and decel times. Each time may be programmed from 0...600 seconds in 0.1 second increments. 150% overload capability for up to 1 minute, 200% overload capability for up to 3 seconds. Provides class 10 motor overload protection according to NEC article 430 and motor over-temperature protection according to NEC article 430.126 (A) (2). UL 508C File 29572. |

Enclosure Options and Approximate Dimensions

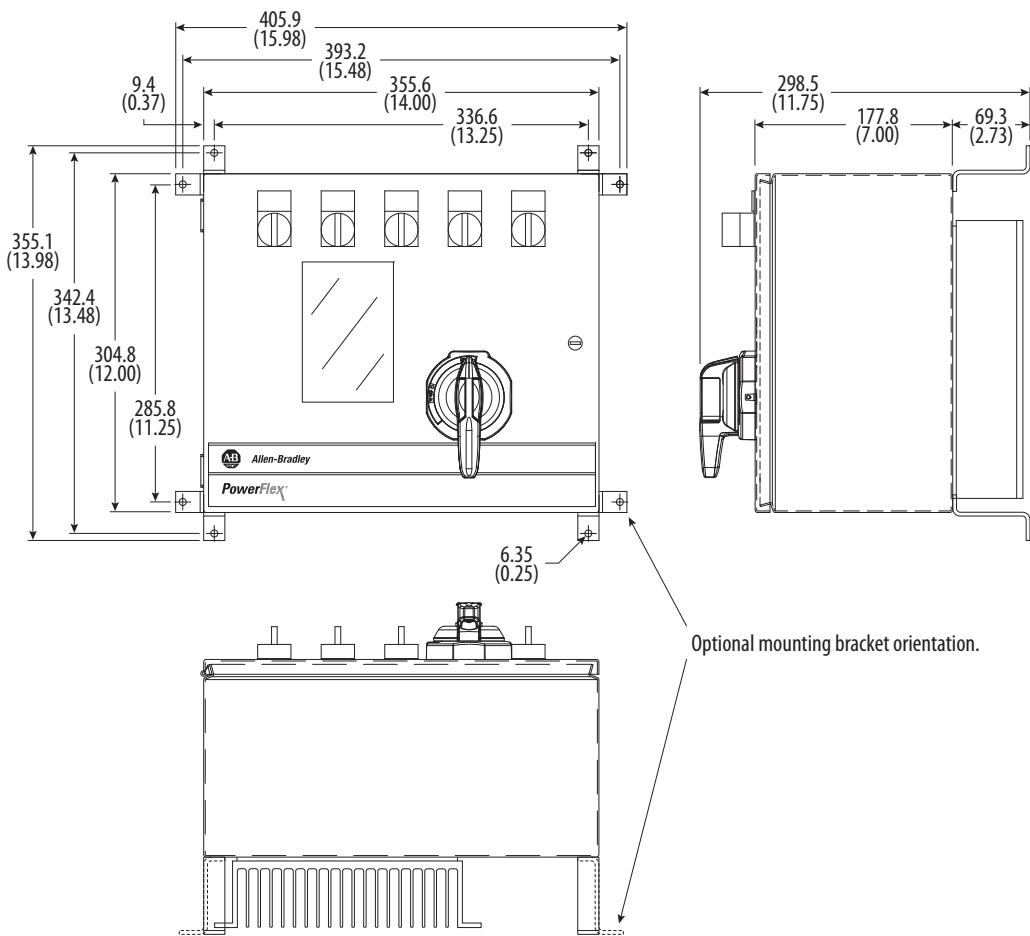

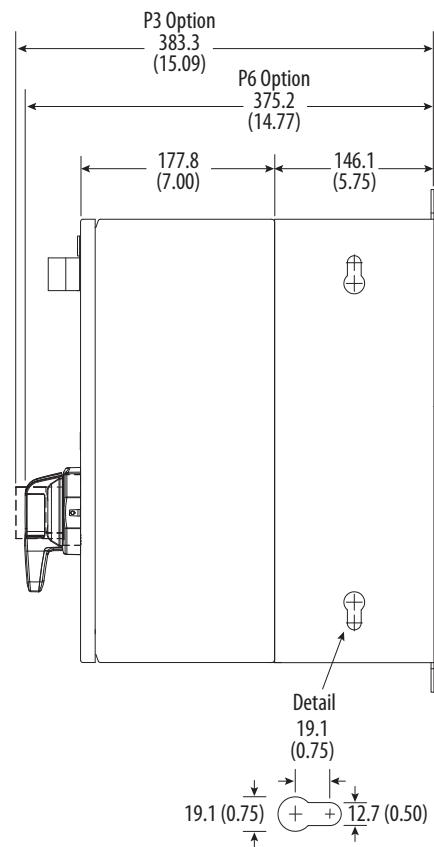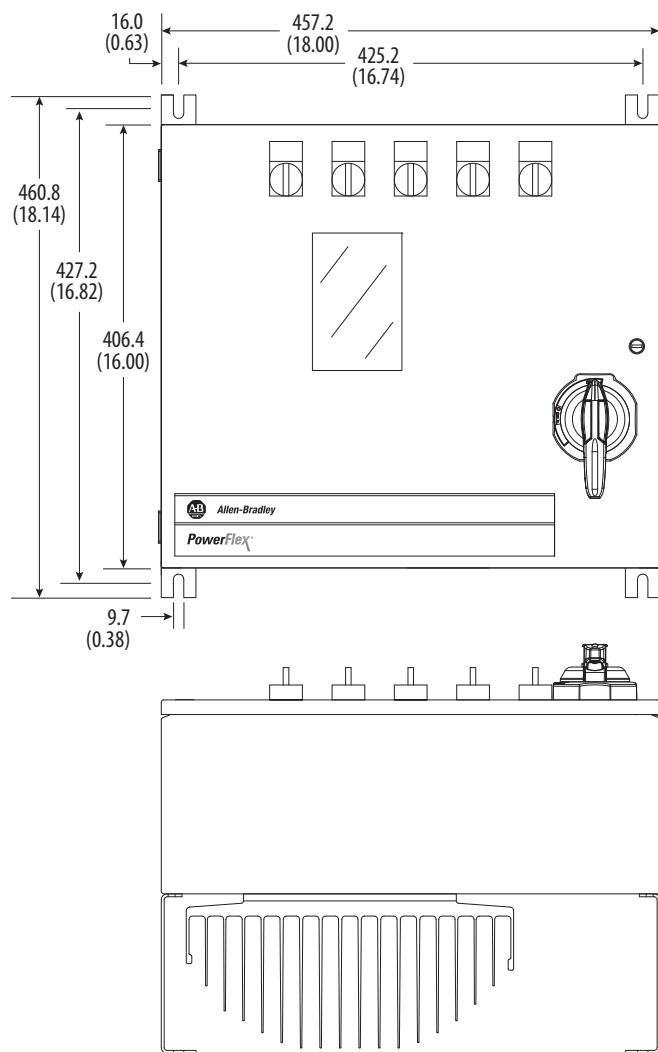Frame C

Important Information

Solid-state equipment has operational characteristics differing from those of electromechanical equipment. Safety Guidelines for the Application, Installation and Maintenance of Solid State Controls (publication [SGI-1.1](#) available from your local Rockwell Automation sales office or online at <http://www.rockwellautomation.com/literature/>) describes some important differences between solid-state equipment and hard-wired electromechanical devices. Because of this difference, and also because of the wide variety of uses for solid-state equipment, all persons responsible for applying this equipment must satisfy themselves that each intended application of this equipment is acceptable.

In no event will Rockwell Automation, Inc. be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this publication are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, Rockwell Automation, Inc. cannot assume responsibility or liability for actual use based on the examples and diagrams.

No patent liability is assumed by Rockwell Automation, Inc. with respect to use of information, circuits, equipment, or software described in this manual.

Reproduction of the contents of this manual, in whole or in part, without written permission of Rockwell Automation, Inc., is prohibited.

Documentation Feedback

Your comments will help us serve your documentation needs better. If you have any suggestions on how to improve this document, complete this form, publication [RA-DU002](#), available at <http://www.rockwellautomation.com/literature/>.

Allen-Bradley, Rockwell Software, Rockwell Automation, and TechConnect are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific : Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846