

Product datasheet

Specifications



analog input module X80 - 8 inputs HART - current Isolated

Local distributor code:

400939302

BMEAHI0812

EAN Code: 3606480692314

Main

Range of product	Modicon X80
Product or component type	Analog input module

Complementary

Application specific I/O	HART
Product compatibility	BMEP58... processor BMXFTB20... terminal block ABE7CPA31 BMEXBP... backplane ABE7CPA02 ABE7CPA03 Head module BMECRA31210
Electrical connection	20 ways terminal block Telefast
Isolation between channels	Isolated
Analogue input number	8
Analogue input type	Current 4...20 mA
Analogue input resolution	15 bits + sign
Input impedance	250 Ohm internally protective resistor (3.6 to 50 Ohm)
Measurement error	0.15 % of full scale 25 °C <= 0.3 % of full scale 0...60 °C
Temperature drift	50 ppm/°C
Isolation voltage	1000 V DC for 60 s between channels 1400 V DC for 60 s between channels and ground 1400 V DC for 60 s between channels and bus
Checks	Broken wire detection
Topology	Point-to-point
Function available	I/O mapping
Net weight	0.233 kg

Environment

Ambient air temperature for operation	0...60 °C
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

Product certifications	CE RCM CSA EAC Merchant Navy UL
Standards	EN/IEC 61010-2-201 EN/IEC 61131-2 UL 61010-2-201 CSA C22.2 No 61010-2-201
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.700 cm
Package 1 Width	11.200 cm
Package 1 Length	12.000 cm
Package 1 Weight	229.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.770 kg

Logistical informations

Country of origin	FR
--------------------------	----

Contractual warranty

Warranty	18 months
-----------------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) **138**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture

Circularity Profile [End of Life Information](#)


WEEE  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Take-back No

Dimensions Drawings

Modules Mounted on Racks

Dimensions

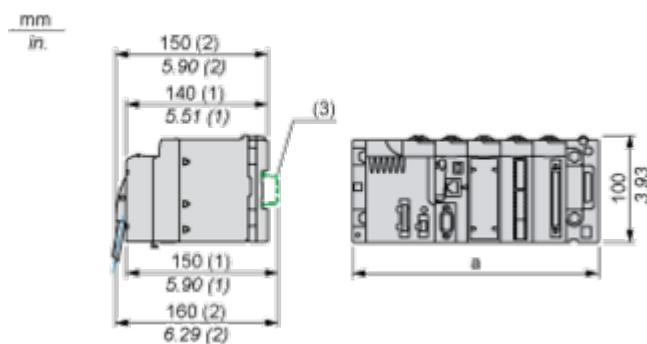

(1) with removable terminal block (cage, screw or spring)

(2) with FCN connector

(3) on AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMEXBP0400/0400H/0800/0800H/1200/1200H rack.

	a (in mm)	a (in in.)
BMEXBP0400 and BMEXBP0400H	242.4	09.54
BMEXBP0800 and BMEXBP0800H	372.8	14.68
BMEXBP1200 and BMEXBP1200H	503.2	19.81


Connections and Schema

Module Connection

NOT CONNECTED	1	NOT CONNECTED
COMMON 0	2	CHANNEL 0
COMMON 1	3	CHANNEL 1
COMMON 2	4	CHANNEL 2
COMMON 3	5	CHANNEL 3
COMMON 4	6	CHANNEL 4
COMMON 5	7	CHANNEL 5
COMMON 6	8	CHANNEL 6
COMMON 7	9	CHANNEL 7
NOT CONNECTED	10	NOT CONNECTED
	11	
	12	
	13	
	14	
	15	
	16	
	17	
	18	
	19	
	20	


Input Circuit Diagram

With 2-Wire Transmitter

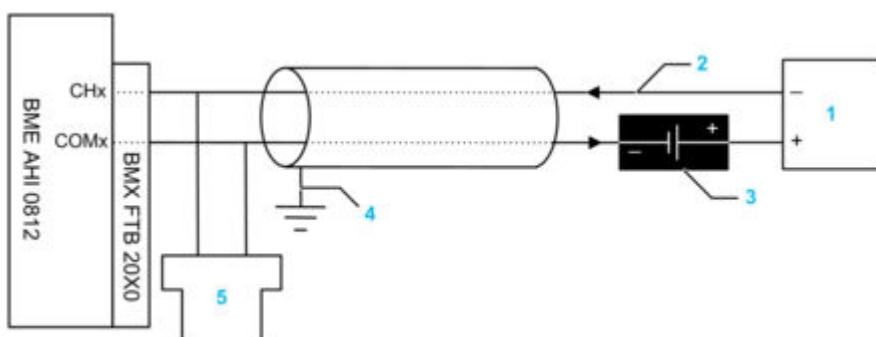


1 2-wire transmitter
 2 4-20 mA current loop, with arrows indicating direction of current flow
 3 Field power supply
 4 Protective ground
 5 Secondary HART master (hand-held)

With 4-Wire Transmitter

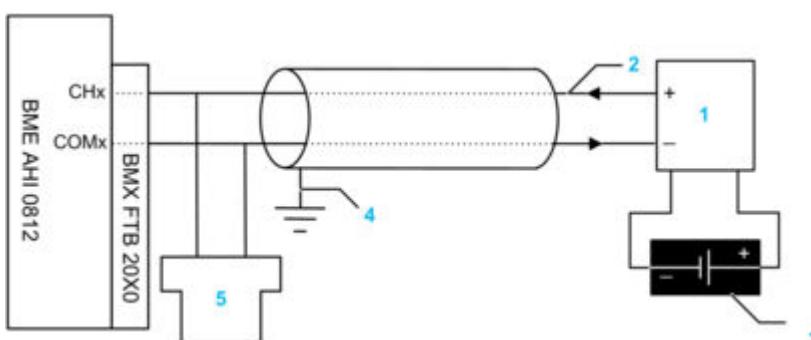

1 4-wire transmitter
 2 4-20 mA current loop, with arrows indicating direction of current flow
 3 Field power supply
 4 Protective ground
 5 Secondary HART master (hand-held)


With 2-Wire Transmitter and TELEFAST Connector with Power Supply

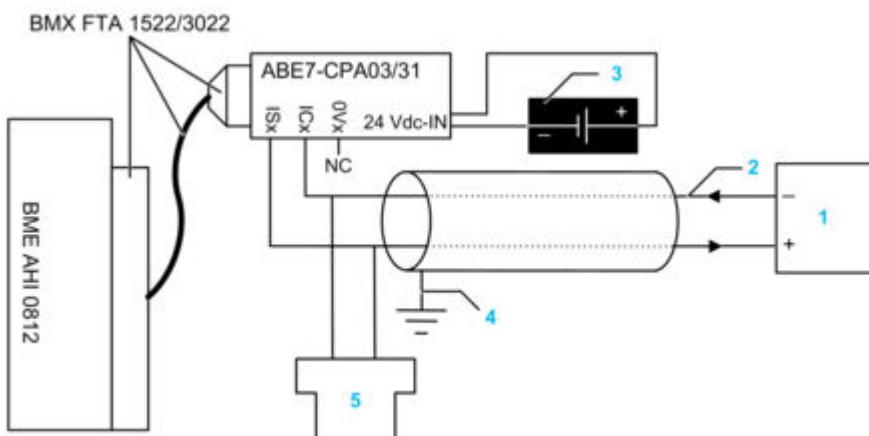

1 2-wire transmitter
 2 4-20 mA current loop, with arrows indicating direction of current flow


- 3 24 Vdc power supply
- 4 Protective ground
- 5 Secondary HART master (hand-held)

With 4-Wire Transmitter and TELEFAST Connector with Power Supply

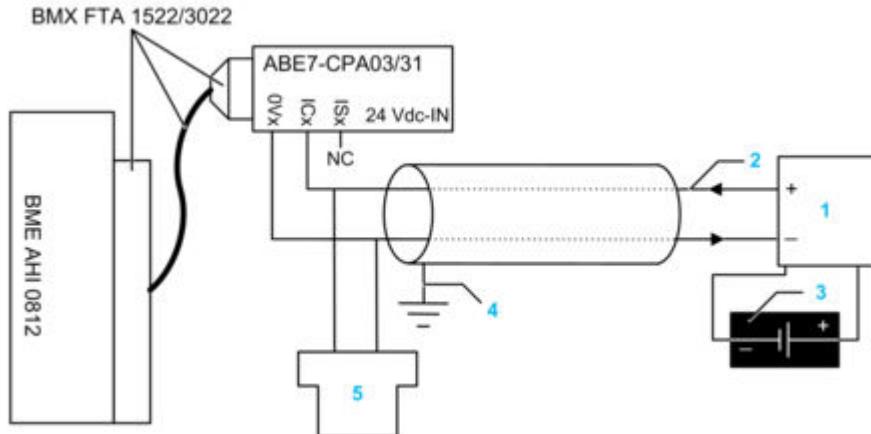


- 1 4-wire transmitter
- 2 4-20 mA current loop, with arrows indicating direction of current flow
- 3 Field power supply
- 4 Protective ground
- 5 Secondary HART master (hand-held)

With 2-Wire Transmitter and TELEFAST Connector without Power Supply

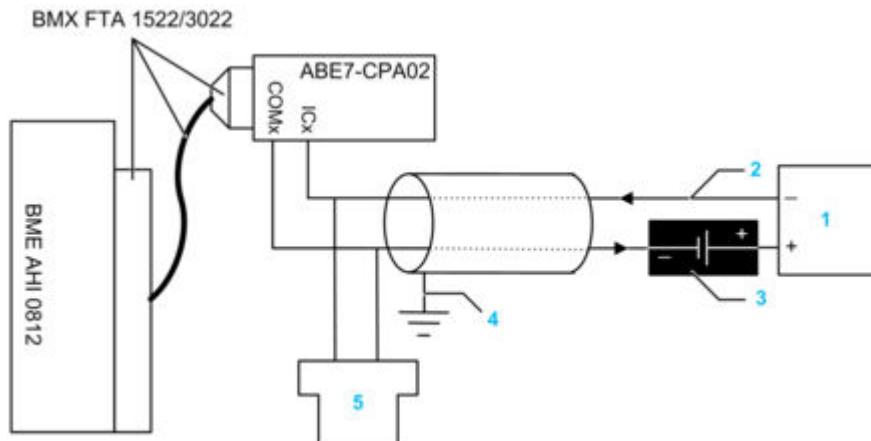

- 1 2-wire transmitter
- 2 4-20 mA current loop, with arrows indicating direction of current flow
- 3 Field power supply
- 4 Protective ground
- 5 Secondary HART master (hand-held)

With 4-Wire Transmitter and TELEFAST Connector without Power Supply

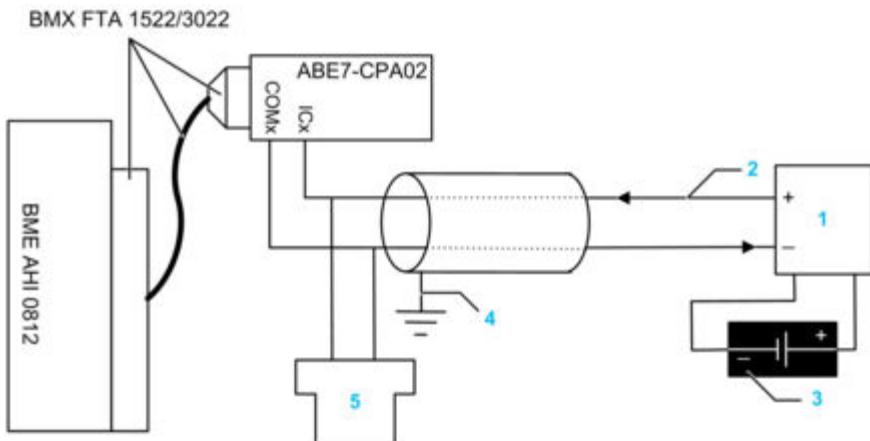

- 1 4-wire transmitter
- 2 4-20 mA current loop, with arrows indicating direction of current flow
- 3 Field power supply
- 4 Protective ground
- 5 Secondary HART master (hand-held)