

# Product datasheet

Specifications



## variable speed drive, ATV320, 0.75 kW, 380...500 V, 3 phases, compact

Local distributor code:

403009161

ATV320U07N4C

EAN Code: 3606480966736

### Main

|                              |   |
|------------------------------|---|
| Range of product             | Altivar Machine ATV320  |
| Product or component type    | Variable speed drive  |
| Product specific application | Complex machines  |
| Variant                      | Standard version  |
| Format of the drive          | Compact   |
| Mounting mode                | Wall mount  |
| Communication port protocol  | Modbus serial<br>CANopen  |
| Option card                  | Communication module, CANopen<br>Communication module, EtherCAT<br>Communication module, Profibus DP V1<br>Communication module, PROFINET<br>Communication module, Ethernet Powerlink<br>Communication module, EtherNet/IP<br>Communication module, DeviceNet |
| [Us] rated supply voltage    | 380...500 V - 15...10 %   |
| Nominal output current       | 2.3 A   |
| Motor power kW               | 0.75 kW for heavy duty  |
| EMC filter                   | Class C2 EMC filter integrated  |
| IP degree of protection      | IP20  |

### Complementary

|                        |   |
|------------------------|---|
| Discrete input number  | 7   |
| Discrete input type    | STO safe torque off, 24 V DC, impedance: 1.5 kOhm<br>DI1...DI6 logic inputs, 24 V DC (30 V)<br>DI5 programmable as pulse input: 0...30 kHz, 24 V DC (30 V)  |
| Discrete input logic   | Positive logic (source)<br>Negative logic (sink)  |
| Discrete output number | 3   |
| Discrete output type   | Open collector DQ+ 0...1 kHz 30 V DC 100 mA<br>Open collector DQ- 0...1 kHz 30 V DC 100 mA  |
| Analogue input number  | 3   |
| Analogue input type    | AI1 voltage: 0...10 V DC, impedance: 30 kOhm, resolution 10 bits<br>AI2 bipolar differential voltage: +/- 10 V DC, impedance: 30 kOhm, resolution 10 bits<br>AI3 current: 0...20 mA (or 4-20 mA, x-20 mA, 20-x mA or other patterns by configuration), impedance: 250 Ohm, resolution 10 bits |
| Analogue output number | 1   |

|   |   |
|---|---|
| <b>Analogue output type</b>                                 | Software-configurable current AQ1: 0...20 mA impedance 800 Ohm, resolution 10 bits<br>Software-configurable voltage AQ1: 0...10 V DC impedance 470 Ohm, resolution 10 bits  |
| <b>Relay output type</b>                                    | Configurable relay logic R1A 1 NO electrical durability 100000 cycles<br>Configurable relay logic R1B 1 NC electrical durability 100000 cycles<br>Configurable relay logic R1C<br>Configurable relay logic R2A 1 NO electrical durability 100000 cycles<br>Configurable relay logic R2C   |
| <b>Maximum switching current</b>                            | Relay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 250 V AC<br>Relay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 30 V DC<br>Relay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC<br>Relay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC<br>Relay output R2A, R2C on resistive load, cos phi = 1: 5 A at 30 V DC |
| <b>Minimum switching current</b>                            | Relay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC   |
| <b>Method of access</b>                                     | Slave CANopen   |
| <b>4 quadrant operation possible</b>                        | True  |
| <b>Asynchronous motor control profile</b>                   | Voltage/frequency ratio, 5 points<br>Flux vector control without sensor, standard<br>Voltage/frequency ratio - Energy Saving, quadratic U/f<br>Flux vector control without sensor - Energy Saving<br>Voltage/frequency ratio, 2 points  |
| <b>Synchronous motor control profile</b>                    | Vector control without sensor   |
| <b>Maximum output frequency</b>                             | 0.599 kHz   |
| <b>Acceleration and deceleration ramps</b>                  | Linear<br>U<br>S<br>CUS<br>Ramp switching<br>Acceleration/deceleration ramp adaptation<br>Acceleration/deceleration automatic stop with DC injection  |
| <b>Motor slip compensation</b>                              | Automatic whatever the load<br>Adjustable 0...300 %<br>Not available in voltage/frequency ratio (2 or 5 points)   |
| <b>Switching frequency</b>                                  | 2...16 kHz adjustable<br>4...16 kHz with derating factor  |
| <b>Nominal switching frequency</b>                          | 4 kHz   |
| <b>Braking to standstill</b>                                | By DC injection   |
| <b>Brake chopper integrated</b>                             | True  |
| <b>Line current</b>   | 3.6 A at 380 V (heavy duty)<br>2.8 A at 500 V (heavy duty)  |
| <b>Maximum input current</b>                                | 3.6 A   |
| <b>Maximum output voltage</b>                               | 500 V   |
| <b>Apparent power</b>                                       | 2.4 kVA at 500 V (heavy duty)   |
| <b>Network frequency</b>                                    | 50...60 Hz  |
| <b>Relative symmetric network frequency tolerance</b>       | 5 %   |
| <b>Prospective line Isc</b>                                 | 5 kA  |
| <b>Base load current at high overload</b>                   | 7.1 A   |
| <b>Power dissipation in W</b>                               | Fan: 32.0 W at 380 V, switching frequency 4 kHz   |
| <b>With safety function Safely Limited Speed (SLS)</b>      | True  |
| <b>With safety function Safe brake management (SBC/SBT)</b> | False   |

|  |  |
|--|--|
| With safety function Safe Operating Stop (SOS)     | False  |
| With safety function Safe Position (SP)            | False  |
| With safety function Safe programmable logic       | False  |
| With safety function Safe Speed Monitor (SSM)      | False  |
| With safety function Safe Stop 1 (SS1)             | True   |
| With sft fct Safe Stop 2 (SS2)                     | False  |
| With safety function Safe torque off (STO)         | True   |
| With safety function Safely Limited Position (SLP) | False  |
| With safety function Safe Direction (SDI)          | False  |
| Protection type                                    | Input phase breaks: drive<br>Overcurrent between output phases and earth: drive<br>Overheating protection: drive<br>Short-circuit between motor phases: drive<br>Thermal protection: drive |
| Width  | 105.0 mm   |
| Height   | 142.0 mm   |
| Depth  | 158.0 mm   |
| Net weight   | 1.2 kg   |
| Transient overtorque                               | 170...200 % of nominal motor torque  |

## Environment

|  |   |
|--|---|
| Operating position   | Vertical +/- 10 degree  |
| Product certifications   | CE<br>ATEX<br>NOM<br>GOST<br>EAC<br>RCM<br>KC   |
| Marking  | CE<br>ATEX<br>UL<br>CSA<br>EAC<br>RCM   |
| Standards  | IEC 61800-5-1   |
| Electromagnetic compatibility                                    | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2<br>Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4<br>1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6<br>Voltage dips and interruptions immunity test conforming to IEC 61000-4-11 |
| Environmental class (during operation)                           | Class 3C3 according to IEC 60721-3-3<br>Class 3S2 according to IEC 60721-3-3  |
| Maximum acceleration under shock impact (during operation)       | 150 m/s <sup>2</sup> at 11 ms   |
| Maximum acceleration under vibrational stress (during operation) | 10 m/s <sup>2</sup> at 13...200 Hz  |
| Maximum deflection under vibratory load (during operation)       | 1.5 mm at 2...13 Hz   |
| Permitted relative humidity (during operation)                   | Class 3K5 according to EN 60721-3   |

|                                       |   |
|---------------------------------------|---|
| Volume of cooling air                 | 18.0 m3/h   |
| Overvoltage category                  | III   |
| Regulation loop                       | Adjustable PID regulator  |
| Speed accuracy                        | +/- 10 % of nominal slip 0.2 Tn to Tn                           |
| Pollution degree                      | 2   |
| Ambient air transport temperature     | -25...70 °C   |
| Ambient air temperature for operation | -10...50 °C without derating<br>50...60 °C with derating factor |
| Ambient air temperature for storage   | -25...70 °C   |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 18.000 cm |
| Package 1 Width              | 18.500 cm |
| Package 1 Length             | 18.500 cm |
| Package 1 Weight             | 1.680 kg  |
| Unit Type of Package 2       | S06       |
| Number of Units in Package 2 | 30        |
| Package 2 Height             | 75.000 cm |
| Package 2 Width              | 60.000 cm |
| Package 2 Length             | 80.000 cm |
| Package 2 Weight             | 63.490 kg |

## Logistical informations

|                   |    |
|-------------------|----|
| Country of origin | ID |
|-------------------|----|

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) **910**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

### Energy efficiency

Product contributes to saved and avoided emissions **Yes**

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)


WEEE The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Take-back **No**


## Dimensions Drawings

## Dimensions


## Right View, Front View and Front View with EMC Plate

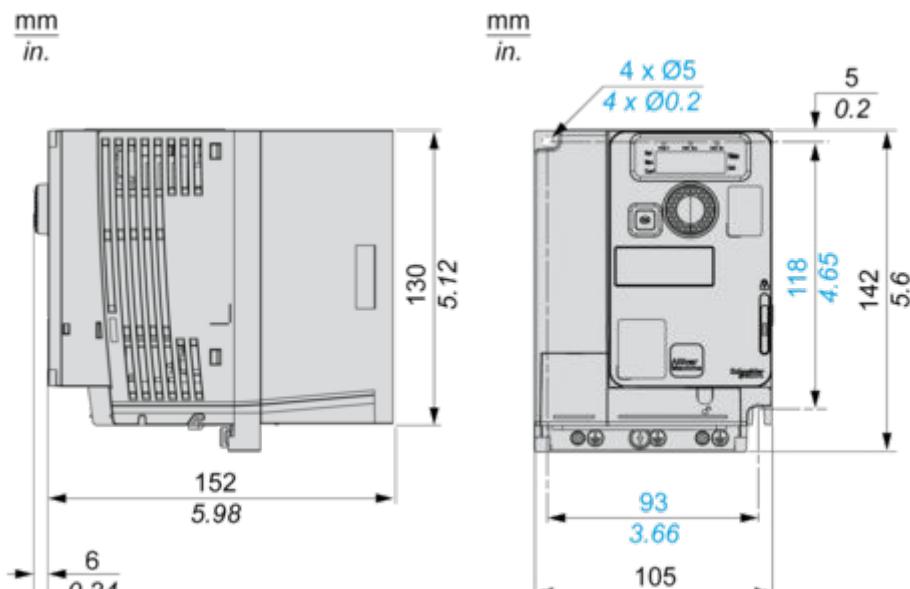



mm  
in.

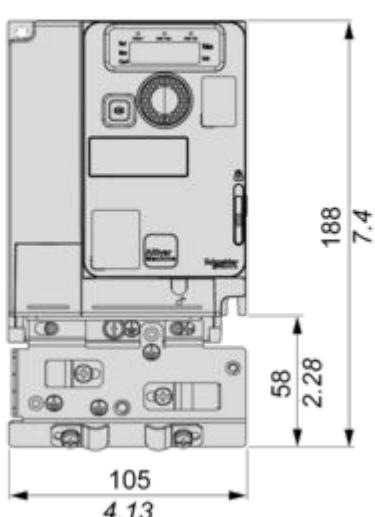

## Mounting and Clearance

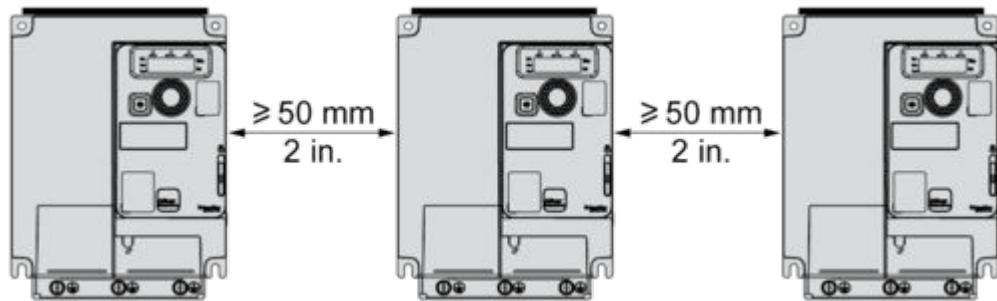Mounting Types**Mounting Type A: Individual with Ventilation Cover**

Only Possible at Ambient Temperature Less or Equal to 50 °C (122 °F)

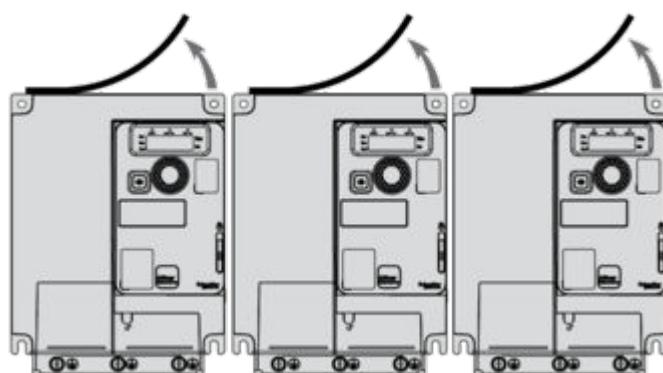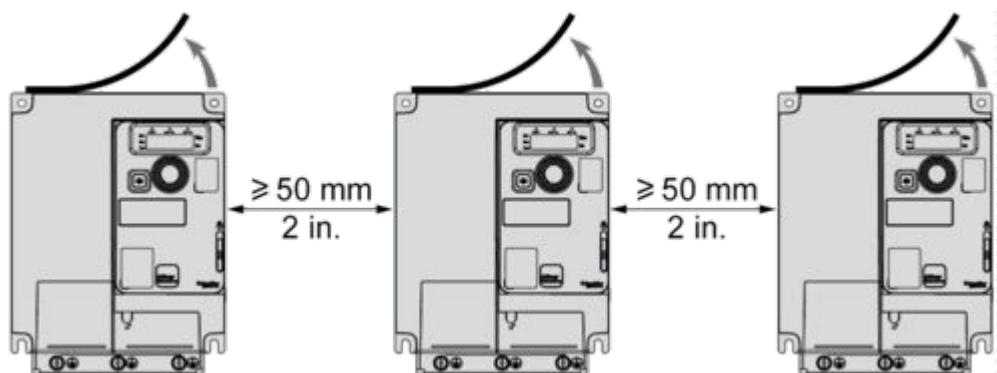**Mounting Type B: Side by Side, Ventilation Cover Removed****Mounting Type C: Individual, Ventilation Cover Removed**


For Operation at Ambient Temperature Above 50 °C (122 °F)

## Connections and Schema

## Connection Diagrams

## Diagram with Line Contactor

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

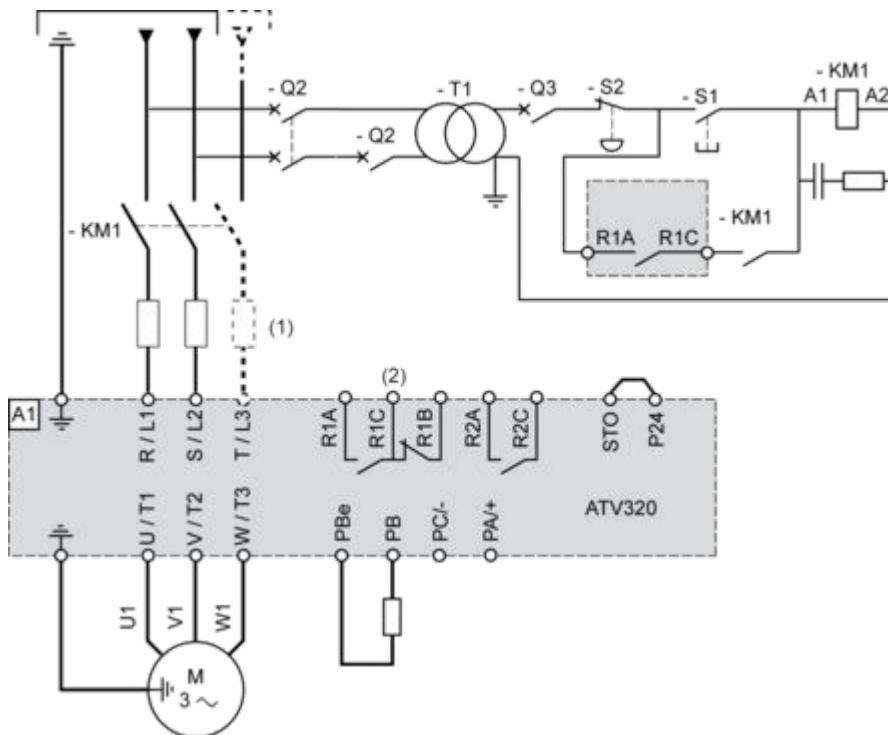


(1) Line choke (if used)

(2) Fault relay contacts, for remote signaling of drive status

## Diagram with Switch Disconnect


Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

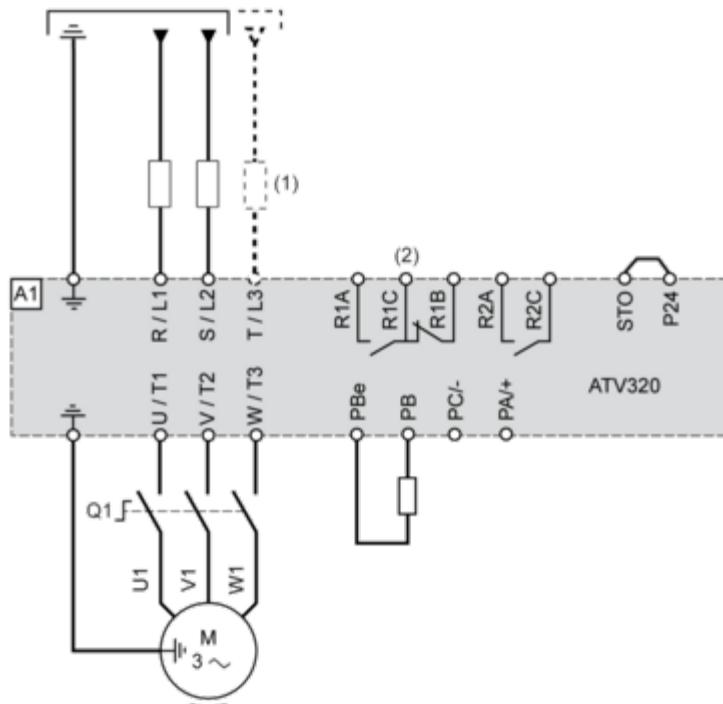

(1) Line choke (if used)

(2) Fault relay contacts, for remote signaling of drive status

## Control Connection Diagram in Source Mode

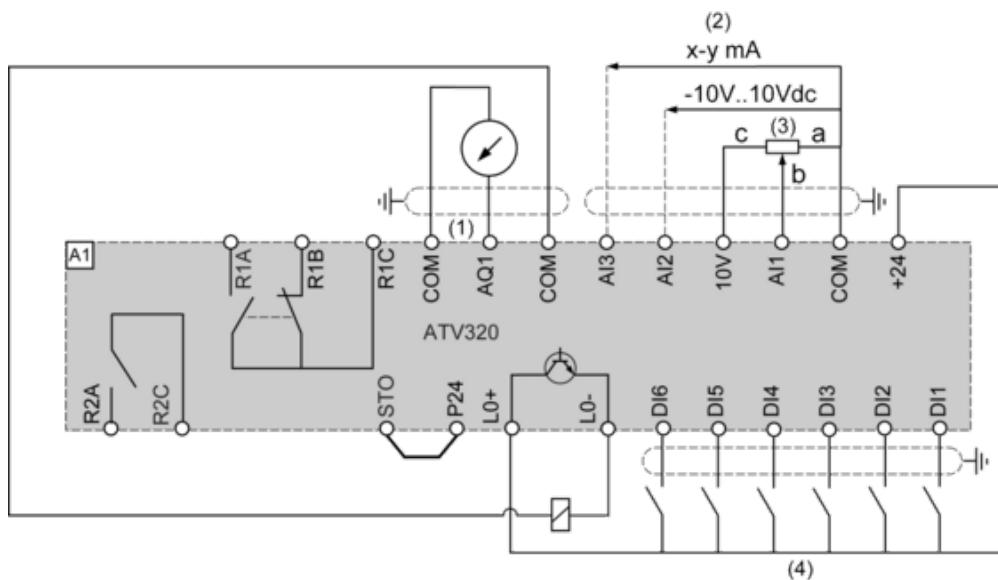

(1) Analog output

(2) Analog inputs


(3) Reference potentiometer (10 kOhm maxi)

(4) Digital inputs


### Digital Inputs Wiring

The logic input switch (SW1) is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.


Switch SW1 set to "Source" position and use of the output power supply for the DI.

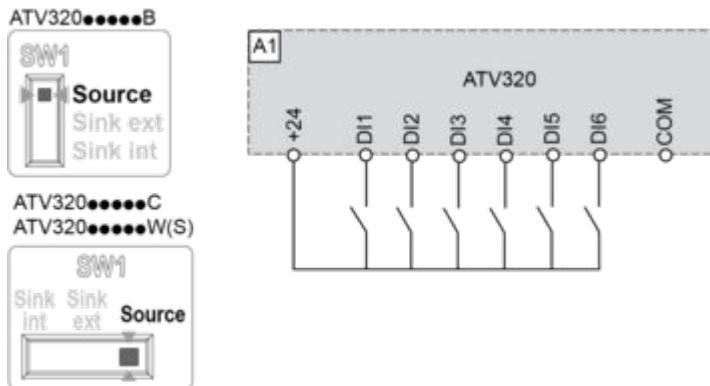


Switch SW1 set to "Source" position and use of an external power supply for the DI.

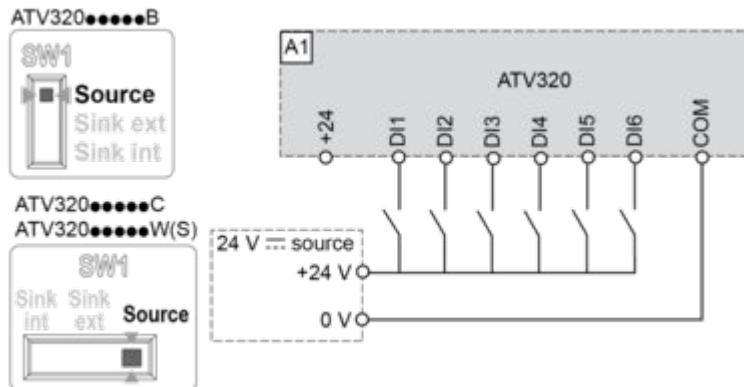

Switch SW1 set to "Sink Int" position and use of the output power supply for the DI.

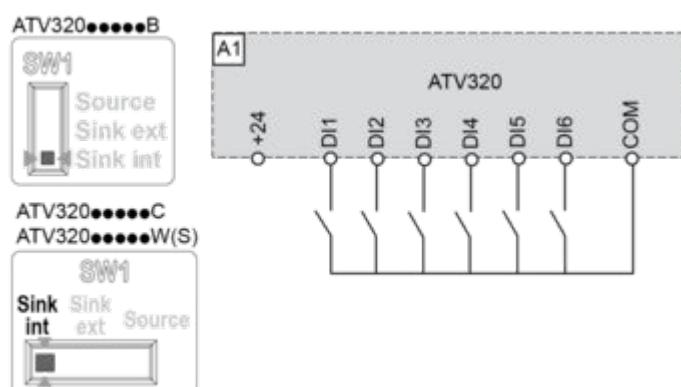

Switch SW1 set to "Sink Ext" position and use of an external power supply for the DI.

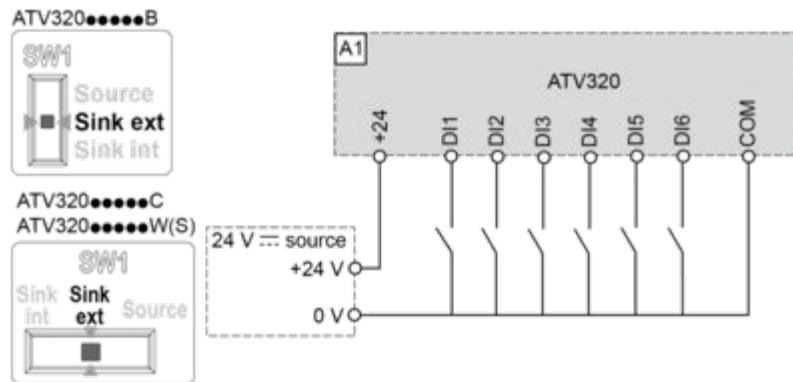

## Performance Curves

Derating Curves