

Article No. : 6SL3210-1KE11-8UP2

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :



Figure similar

Rated data

| | |
|--------------------|---------------------------|
| Input | |
| Number of phases | 3 AC |
| Line voltage | 380 ... 480 V +10 % -20 % |
| Line frequency | 47 ... 63 Hz |
| Rated current (LO) | 2.30 A |
| Rated current (HO) | 1.90 A |

| | | |
|-------------------------------------|--------------|------------------------|
| Output | | |
| Number of phases | 3 AC | |
| Rated voltage | 400V IEC | 480V NEC ¹⁾ |
| Rated power (LO) | 0.55 kW | 0.75 hp |
| Rated power (HO) | 0.37 kW | 0.50 hp |
| Rated current (LO) | 1.70 A | |
| Rated current (HO) | 1.30 A | |
| Rated current (IN) | 1.80 A | |
| Max. output current | 2.60 A | |
| Pulse frequency | 4 kHz | |
| Output frequency for vector control | 0 ... 240 Hz | |
| Output frequency for V/f control | 0 ... 550 Hz | |

| | |
|---|--|
| Overload capability | |
| Low Overload (LO) | |
| 150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time | |
| High Overload (HO) | |
| 200% base load current IH for 3 s, followed by 150% base load current IH for 57 s in a 300 s cycle time | |

General tech. specifications

| | |
|---------------------------|---------------|
| Power factor λ | 0.70 ... 0.85 |
| Offset factor cos φ | 0.95 |
| Efficiency η | 0.97 |
| Sound pressure level (1m) | 49 dB |
| Power loss | 33.5 W |
| Filter class (integrated) | Unfiltered |

Communication

| | |
|---------------|-------------|
| Communication | PROFIBUS DP |
|---------------|-------------|

Inputs / outputs

| | |
|-------------------------|-------|
| Standard digital inputs | |
| Number | 6 |
| Switching level: 0→1 | 11 V |
| Switching level: 1→0 | 5 V |
| Max. inrush current | 15 mA |

| | |
|--------------------------|---|
| Fail-safe digital inputs | |
| Number | 1 |

| | |
|------------------------------------|----------------|
| Digital outputs | |
| Number as relay changeover contact | 1 |
| Output (resistive load) | DC 30 V, 0.5 A |
| Number as transistor | 1 |
| Output (resistive load) | DC 30 V, 0.5 A |

| | |
|-------------------------|------------------------|
| Analog / digital inputs | |
| Number | 1 (Differential input) |
| Resolution | 10 bit |

| | |
|--------------------------------------|-------|
| Switching threshold as digital input | |
| 0→1 | 4 V |
| 1→0 | 1.6 V |

| | |
|----------------|-------------------------|
| Analog outputs | |
| Number | 1 (Non-isolated output) |

| | |
|---|--|
| PTC/ KTY interface | |
| 1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy ±5 °C | |

Closed-loop control techniques

| | |
|---|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC) | Yes |
| V/f ECO linear / square-law | Yes |
| Sensorless vector control | Yes |
| Vector control, with sensor | No |
| Encoderless torque control | No |
| Torque control, with encoder | No |

Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE11-8UP2

| Ambient conditions | |
|-------------------------|-------------------------------------|
| Cooling | Air cooling using an integrated fan |
| Cooling air requirement | 0.005 m³/s (0.177 ft³/s) |
| Installation altitude | 1,000 m (3,280.84 ft) |

Ambient temperature

| | |
|-----------|--------------------------------|
| Operation | -10 ... 40 °C (14 ... 104 °F) |
| Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Storage | -25 ... 55 °C (-13 ... 131 °F) |

Relative humidity

| | |
|----------------|--|
| Max. operation | 95 % At 40 °C (104 °F), condensation and icing not permissible |
|----------------|--|

| Connections |
|-------------|
|-------------|

Signal cable

| | |
|-------------------------|--|
| Conductor cross-section | 0.15 ... 1.50 mm² (AWG 24 ... AWG 16) |
|-------------------------|--|

Line side

| | |
|-------------------------|--|
| Version | Plug-in screw terminals |
| Conductor cross-section | 1.00 ... 2.50 mm² (AWG 18 ... AWG 14) |

Motor end

| | |
|-------------------------|--|
| Version | Plug-in screw terminals |
| Conductor cross-section | 1.00 ... 2.50 mm² (AWG 18 ... AWG 14) |

DC link (for braking resistor)

| | |
|-------------------------|--|
| Version | Plug-in screw terminals |
| Conductor cross-section | 1.00 ... 2.50 mm² (AWG 18 ... AWG 14) |
| Line length, max. | 15 m (49.21 ft) |
| PE connection | On housing with M4 screw |

Max. motor cable length

| | |
|------------|-------------------|
| Shielded | 150 m (492.13 ft) |
| Unshielded | 150 m (492.13 ft) |

| Mechanical data |
|-----------------|
|-----------------|

| | |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Frame size | FSAA |
| Net weight | 1.40 kg (3.09 lb) |

Dimensions


| | |
|--------|------------------|
| Width | 73 mm (2.87 in) |
| Height | 173 mm (6.81 in) |
| Depth | 155 mm (6.10 in) |

| Standards |
|-----------|
|-----------|

| | |
|---------------------------|---|
| Compliance with standards | CE, cUL, UL, KC, EAC, C-Tick (RCM) |
| CE marking | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |

| Converter losses to IEC61800-9-2* |
|-----------------------------------|
|-----------------------------------|

| | |
|--|--------|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | 25.8 % |

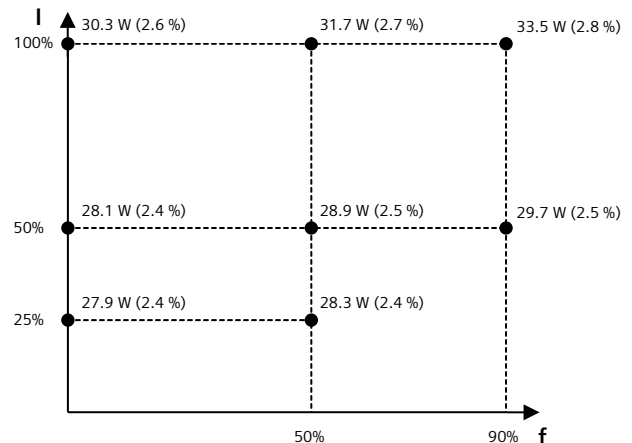

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V