

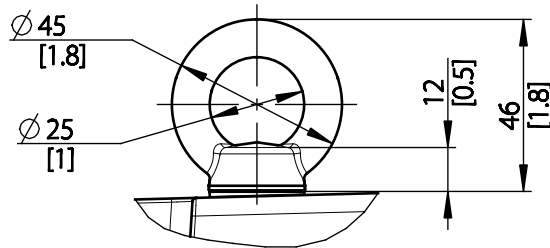



Type	Value
Max Weight	65 kg / 143 lb
IP Class	IP21
Nema Class	Type 1

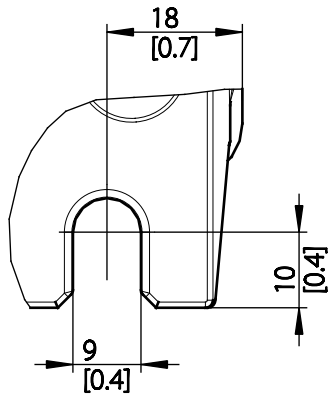




DETAIL C
SCALE 1:2



DETAIL B
SCALE 1:1

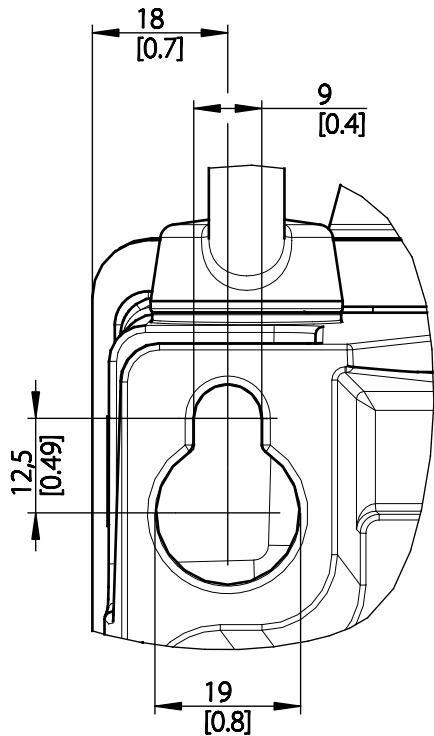




DETAIL A
SCALE 1:1

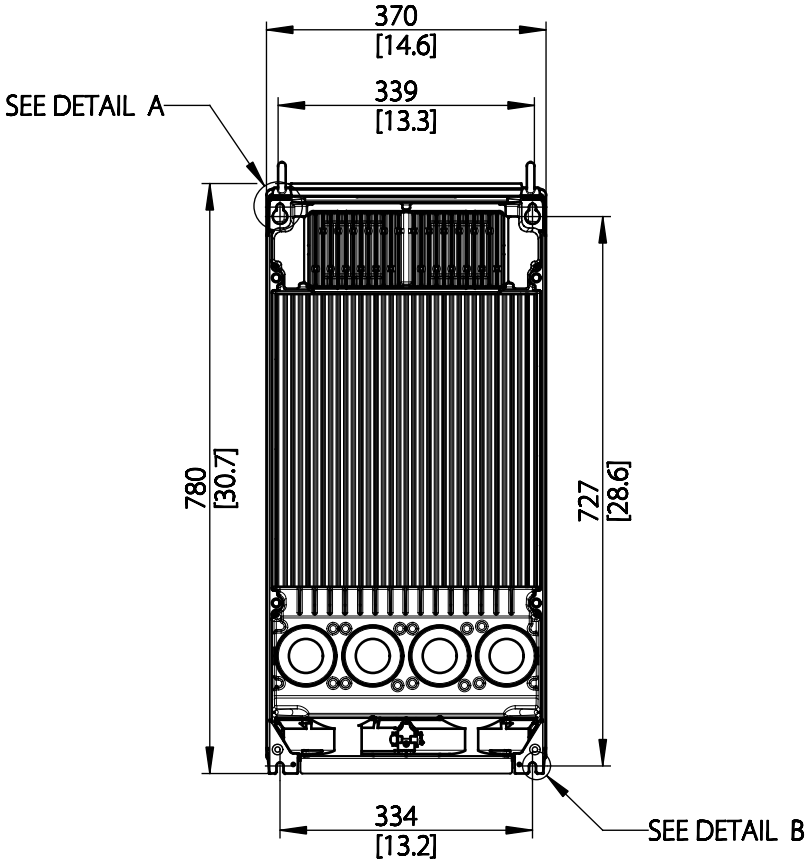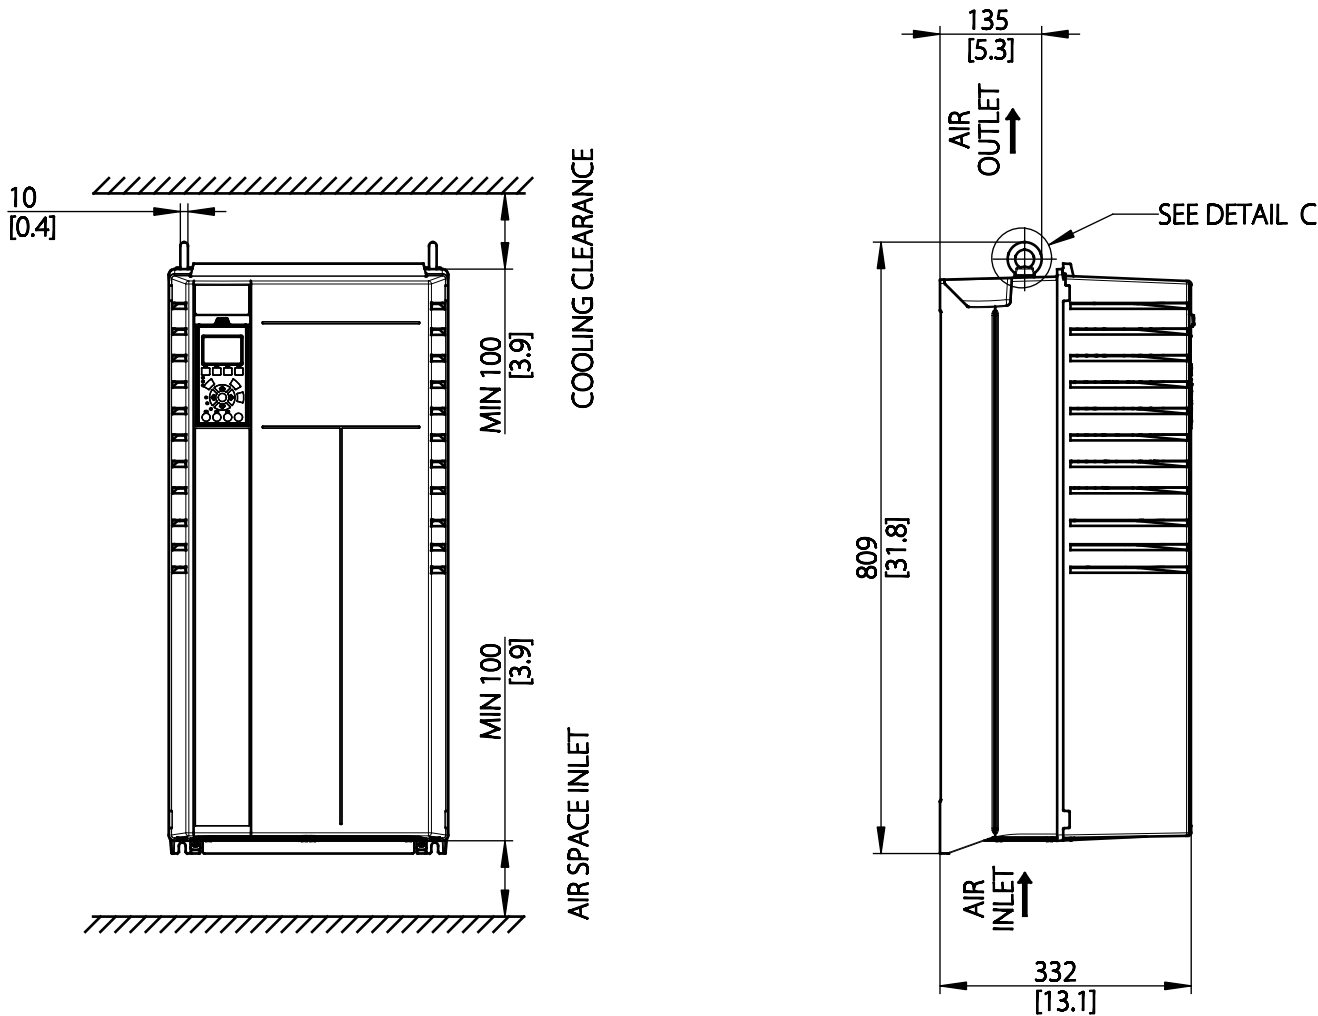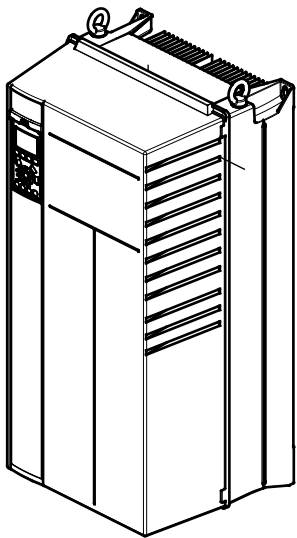

THIS DRAWING SHOWS THE MOST COMMON VERSION OF THIS PRODUCT VARIANT.
SMALL DIFFERENCES MAY OCCUR DEPENDING ON THE FINAL PRODUCT CONFIGURATION.

 CENTER OF GRAVITY:
FOR REFERENCE ONLY, THE PRODUCT CONFIGURATION MAY INFLUENCE THE CG IN ALL THREE AXES.

UNLESS OTHERWISE SPECIFIED THE TOLERANCE IS ±1MM (0,4 INCH). ALL DIMENSIONS ARE IN MILLIMETERS (INCH)			FIRST ANGLE PROJECTION		SCALE 1:10	SIZE A3	MATERIAL			
							FINISH			
							DESCRIPTION MCAD FC C2 IP21 WO DISCONNECT			
CHANGED										
DESIGNED	Danfoss	2015-04-23								
CHECKED										
PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.							DRAWING NUMBER MCAD-FC-C2-IP21-WO-DISCONNECT		REV P1	
							MODEL C2-CUSTOMER-DRAWING		SHEET 1 OF 2	

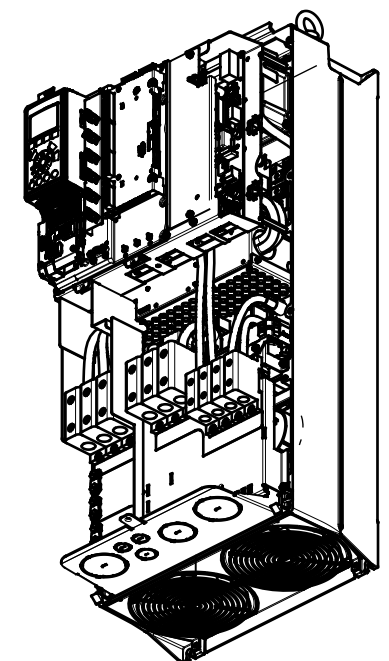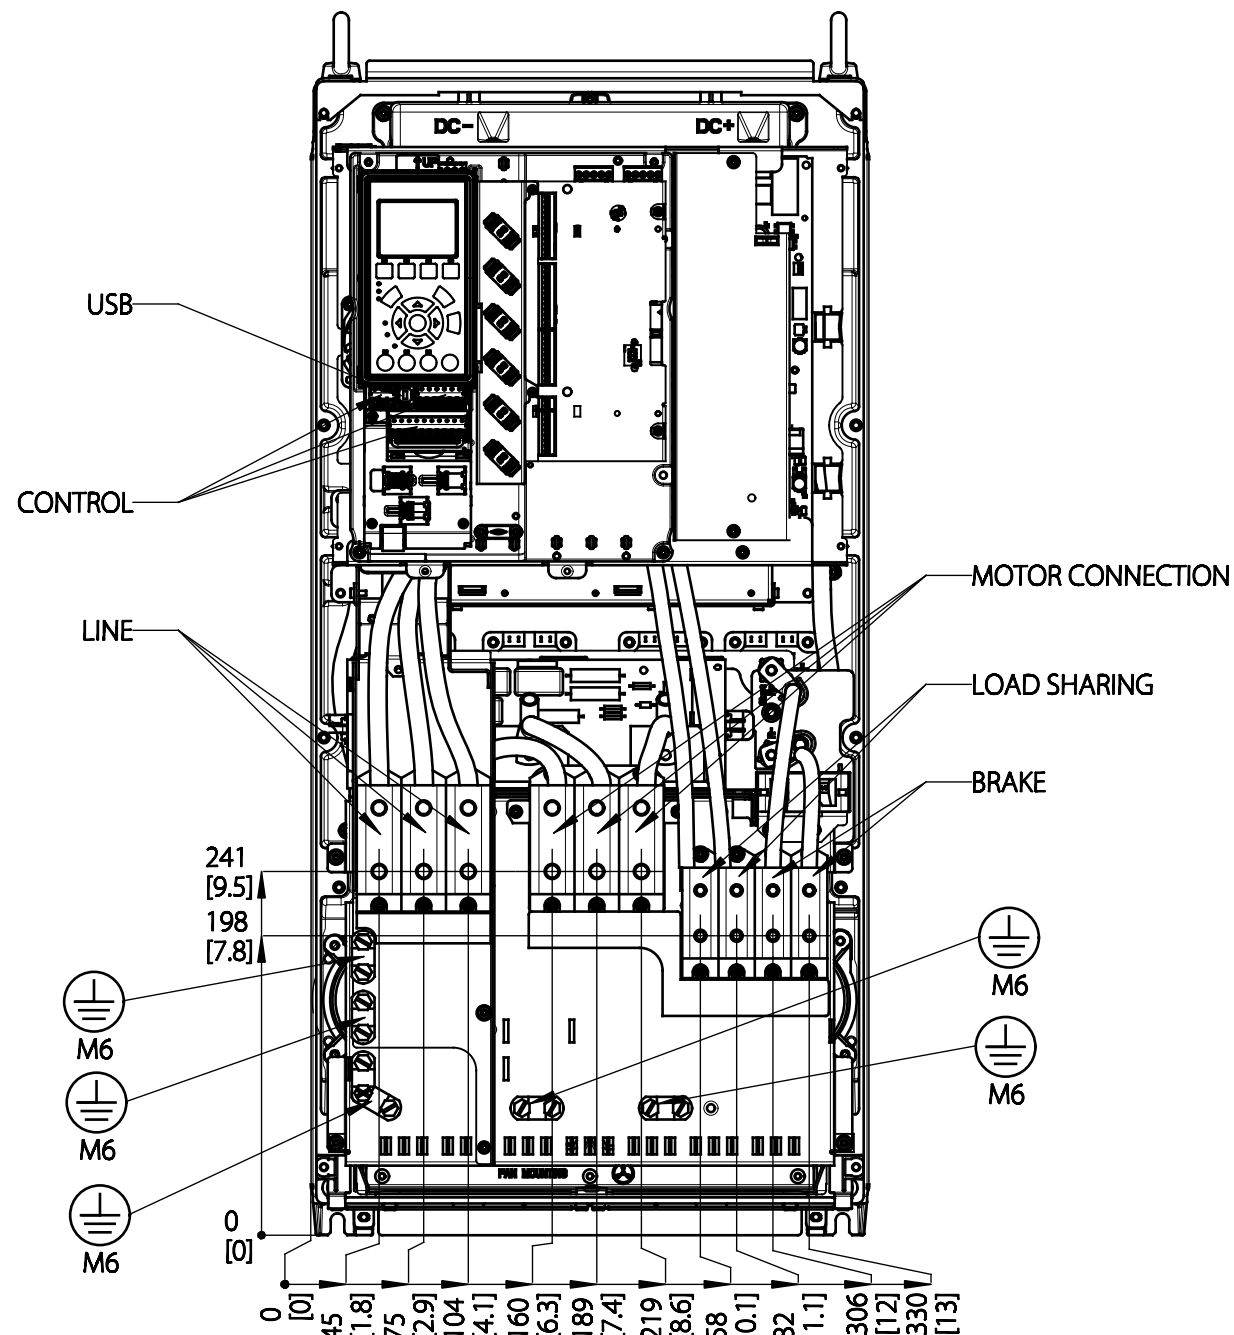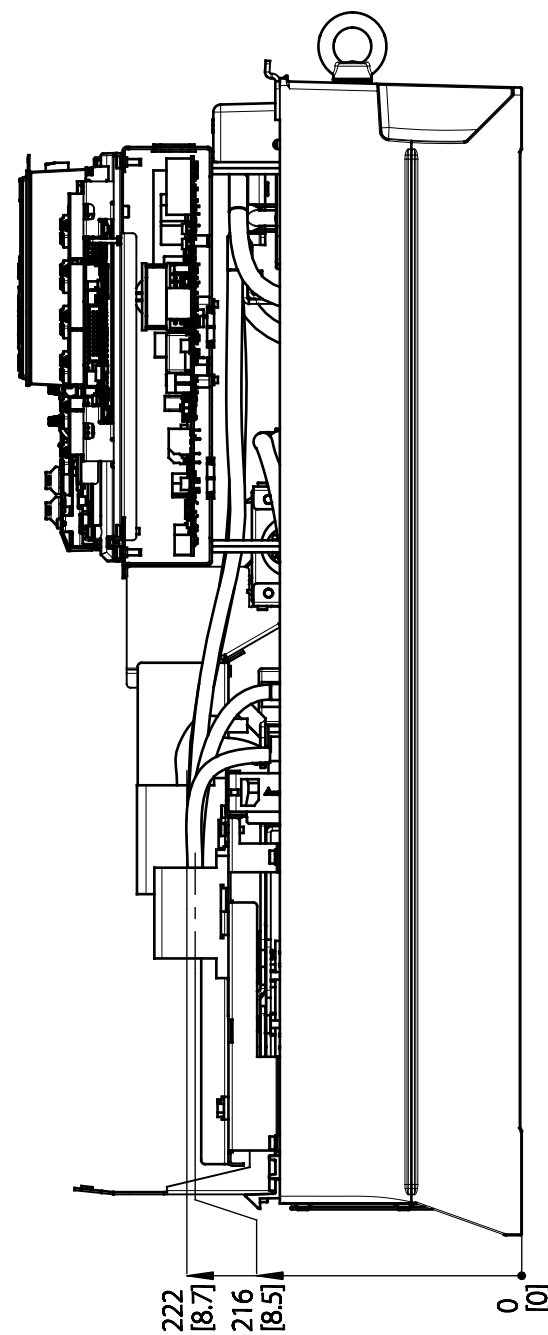

THIS DRAWING SHOWS THE MOST COMMON VERSION OF THIS PRODUCT VARIANT.
SMALL DIFFERENCES MAY OCCUR DEPENDING ON THE FINAL PRODUCT CONFIGURATION.

PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. TWO OR THREE DIMENSIONAL
REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.

DRAWING NUMBER	MCAD-FC-C2-IP21-WO-DISCONNECT	REV	P1
MODEL	C2-CUSTOMER-DRAWING	SHEET	2 OF 2