


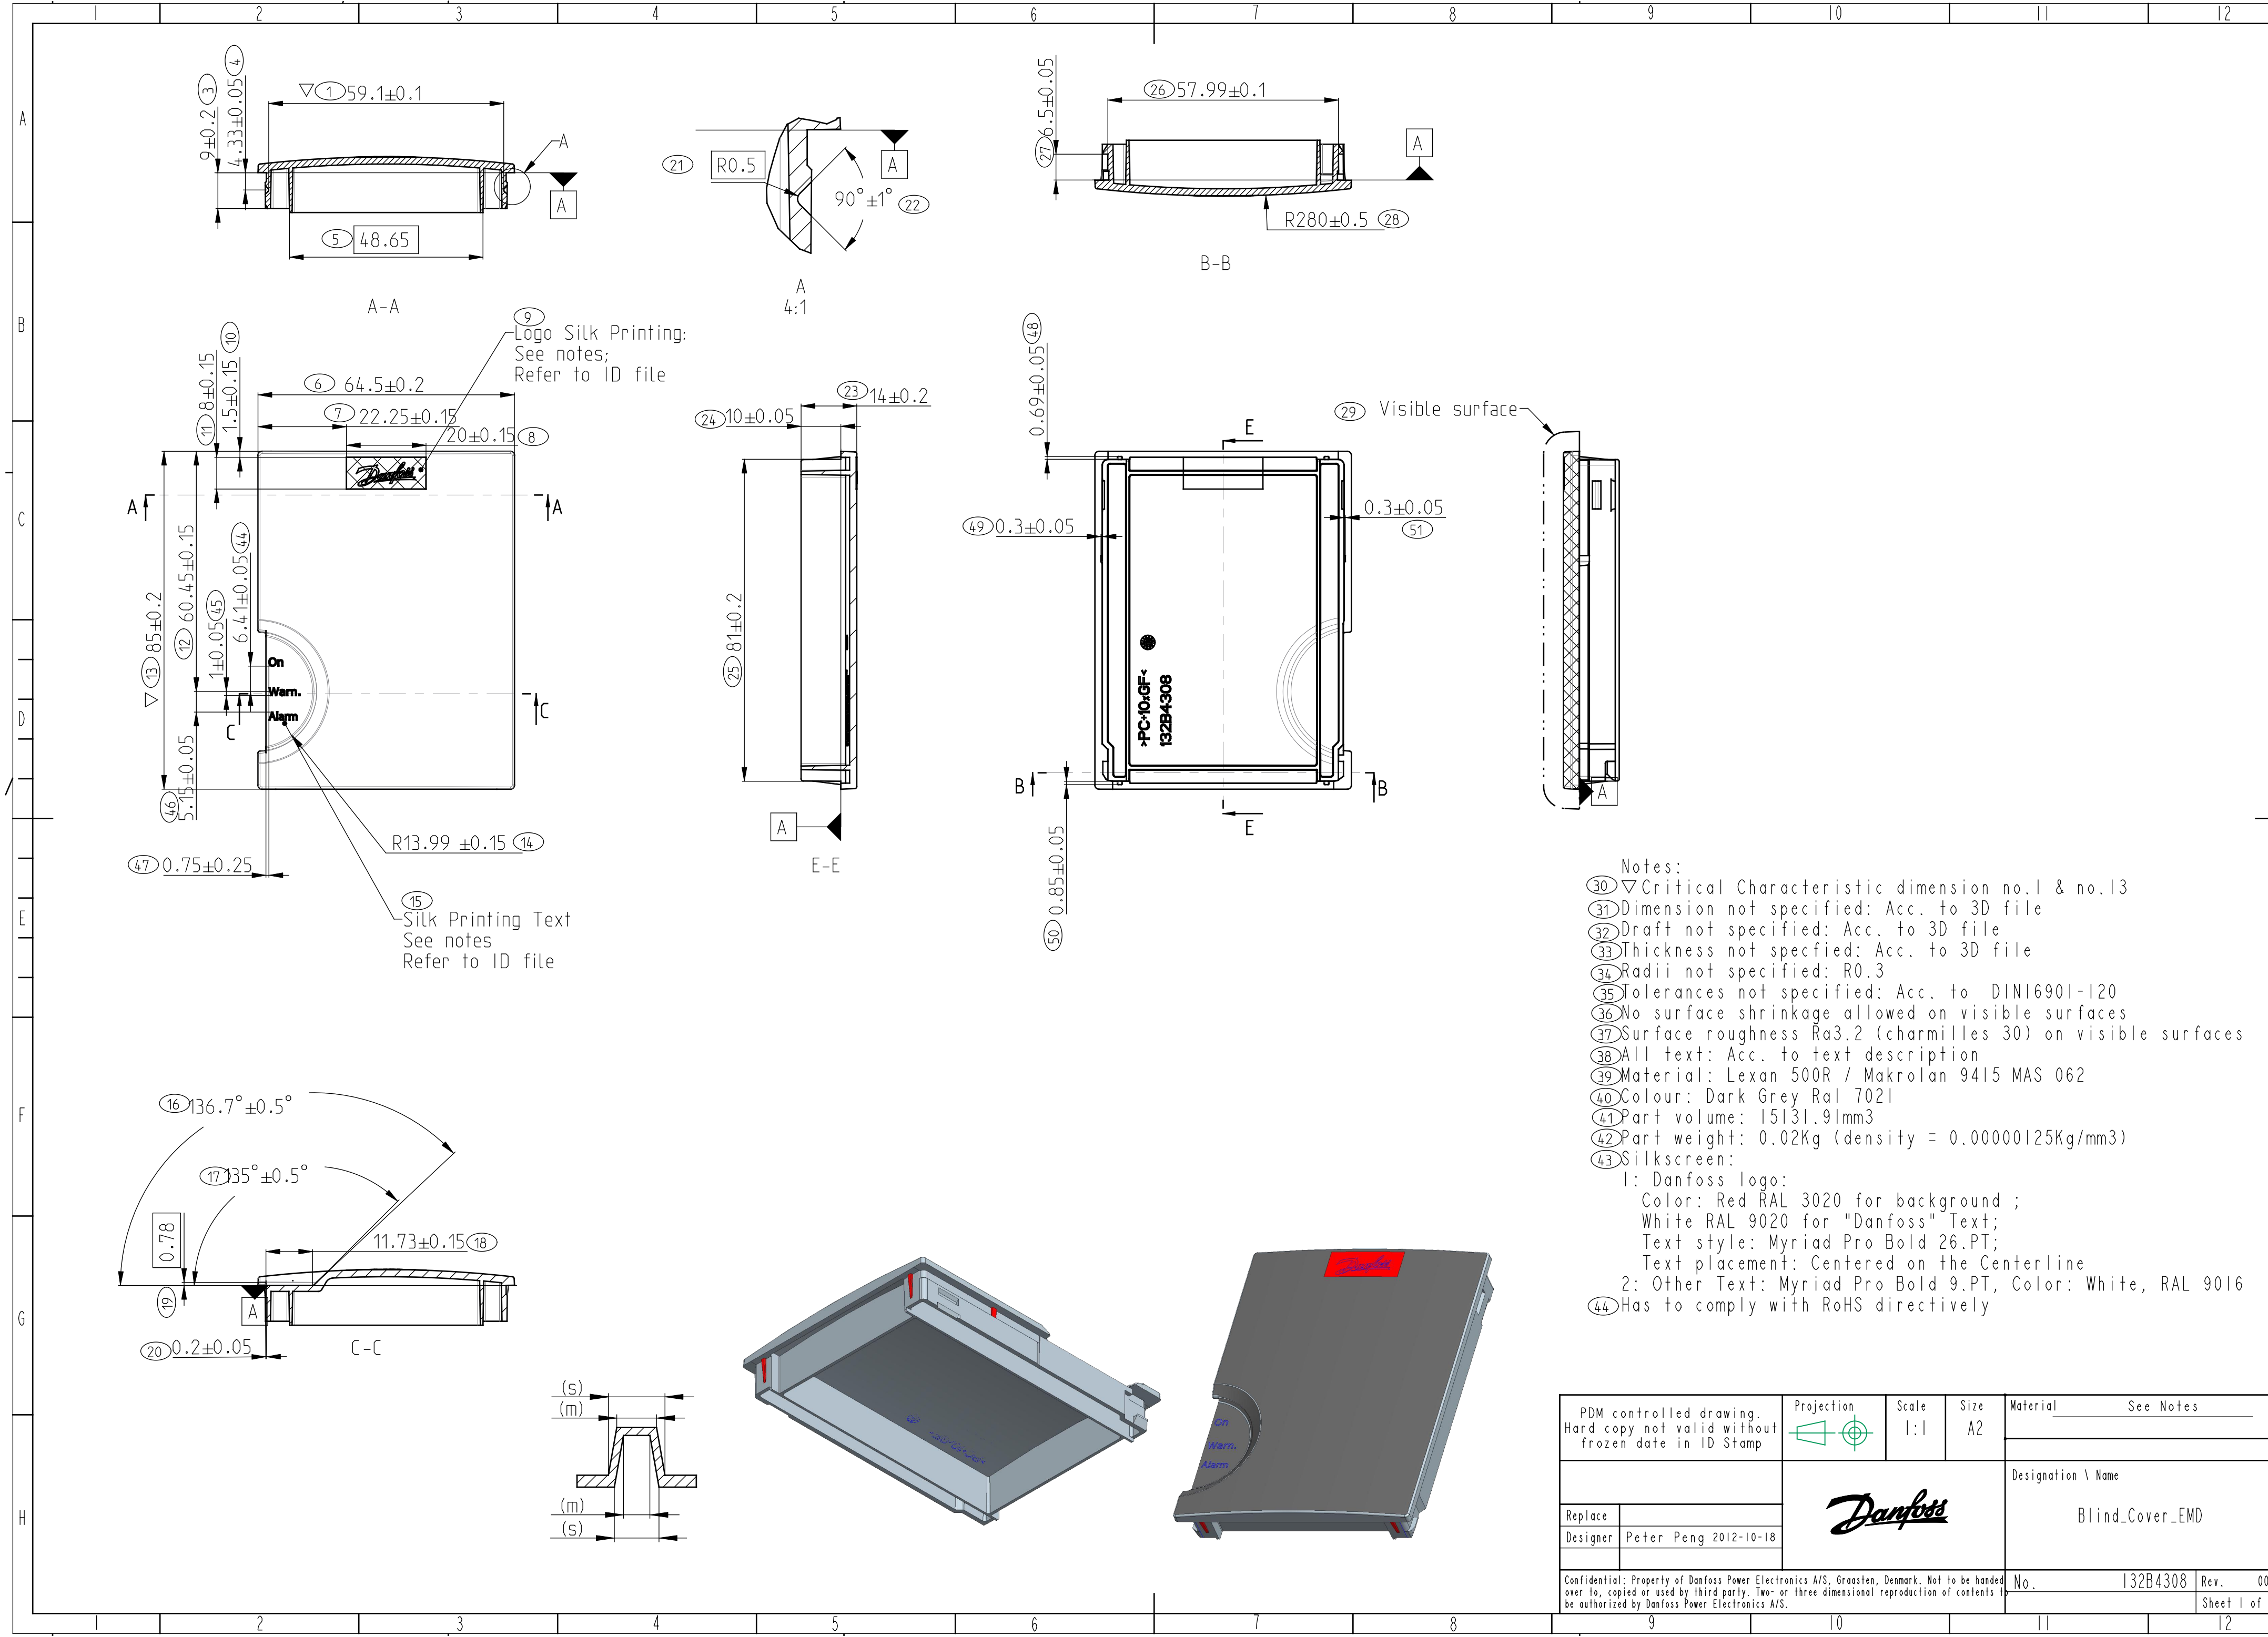

- Notes:
- ③0 ▽ Critical Characteristic dimension no.1 & no.13
 - ③1 Dimension not specified: Acc. to 3D file
 - ③2 Draft not specified: Acc. to 3D file
 - ③3 Thickness not specified: Acc. to 3D file
 - ③4 Radii not specified: R0.3
 - ③5 Tolerances not specified: Acc. to DIN16901-120
 - ③6 No surface shrinkage allowed on visible surfaces
 - ③7 Surface roughness Ra3.2 (charmilles 30) on visible surfaces
 - ③8 All text: Acc. to text description
 - ③9 Material: Lexan 500R / Makrolan 9415 MAS 062
 - ④0 Colour: Dark Grey Ral 7021
 - ④1 Part volume: 15131.91mm³
 - ④2 Part weight: 0.02Kg (density = 0.00000125Kg/mm³)
 - ④3 Silkscreen:
 - 1: Danfoss logo:
 - Color: Red RAL 3020 for background ;
 - White RAL 9020 for "Danfoss" Text;
 - Text style: Myriad Pro Bold 26.PT;
 - Text placement: Centered on the Centerline
 - 2: Other Text: Myriad Pro Bold 9.PT, Color: White, RAL 9016
 - ④4 Has to comply with RoHS directives

PDM controlled drawing. Hard copy not valid without frozen date in ID Stamp		Projection 	Scale 1:1	Size A2	Material See Notes		
					Designation \ Name		
Replace					Blind_Cover_EMD		
Designer	Peter Peng 2012-10-18						
Confidential: Property of Danfoss Power Electronics A/S, Graasten, Denmark. Not to be handed over to, copied or used by third party. Two- or three dimensional reproduction of contents to be authorized by Danfoss Power Electronics A/S.					No.	132B4308	
					Rev.	001	
					Sheet 1 of 1		

Model: 132B4308_PART