

# Product datasheet

Specifications



## variable speed drive - 3kW- 400V - 3 phases - ATV340 Ethernet

Local distributor code:

408900566

ATV340U30N4E

EAN Code: 3606480967016

### Main

|                              |                                             |
|------------------------------|---------------------------------------------|
| Range of product             | Altivar Machine ATV340                      |
| Product or component type    | Variable speed drive                        |
| Product specific application | Machine                                     |
| Mounting mode                | Cabinet mount                               |
| Variant                      | Standard version                            |
| Communication port protocol  | Modbus serial<br>Modbus TCP<br>EtherNet/IP  |
| Network number of phases     | 3 phases                                    |
| Supply frequency             | 50...60 Hz +/- 5 %                          |
| [Us] rated supply voltage    | 380...480 V - 15...10 %                     |
| Nominal output current       | 7.2 A                                       |
| Motor power kW               | 4 kW for normal duty<br>3 kW for heavy duty |
| Motor power hp               | 3 hp for heavy duty<br>5 hp for normal duty |
| EMC filter                   | Class C3 EMC filter integrated              |
| IP degree of protection      | IP20                                        |

### Complementary

|                         |                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Discrete input number   | 5                                                                                                                                                                                                                                                                                                                                                    |
| Discrete input type     | PTI programmable as pulse input: 0...30 kHz, 24 V DC (30 V)<br>DI1...DI5 safe torque off, 24 V DC (30 V), impedance: 3.5 kOhm<br>programmable                                                                                                                                                                                                        |
| number of preset speeds | 16 preset speeds                                                                                                                                                                                                                                                                                                                                     |
| Discrete output number  | 2.0                                                                                                                                                                                                                                                                                                                                                  |
| Discrete output type    | Programmable output DQ1, DQ2 30 V DC 100 mA                                                                                                                                                                                                                                                                                                          |
| Analogue input number   | 2                                                                                                                                                                                                                                                                                                                                                    |
| Analogue input type     | AI1 software-configurable current: 0...20 mA, impedance: 250 Ohm, resolution 12 bits<br>AI1 software-configurable temperature probe or water level sensor<br>AI1 software-configurable voltage: 0...10 V DC, impedance: 31.5 kOhm, resolution 12 bits<br>AI2 software-configurable voltage: - 10...10 V DC, impedance: 31.5 kOhm, resolution 12 bits |
| Analogue output number  | 1                                                                                                                                                                                                                                                                                                                                                    |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analogue output type                | Software-configurable voltage AQ1: 0...10 V DC impedance 470 Ohm, resolution 10 bits<br>Software-configurable current AQ1: 0...20 mA impedance 500 Ohm, resolution 10 bits                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Relay output number                 | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Output voltage                      | <= power supply voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Relay output type                   | Relay outputs R1A<br>Relay outputs R1C electrical durability 100000 cycles<br>Relay outputs R2A<br>Relay outputs R2C electrical durability 100000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Maximum switching current           | Relay output R1C on resistive load, cos phi = 1: 3 A at 250 V AC<br>Relay output R1C on resistive load, cos phi = 1: 3 A at 30 V DC<br>Relay output R1C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R1C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC<br>Relay output R2C on resistive load, cos phi = 1: 5 A at 250 V AC<br>Relay output R2C on resistive load, cos phi = 1: 5 A at 30 V DC<br>Relay output R2C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R2C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC |
| Minimum switching current           | Relay output R1B: 5 mA at 24 V DC<br>Relay output R2C: 5 mA at 24 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Physical interface                  | 2-wire RS 485                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Connector type                      | 3 RJ45                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Method of access                    | Slave Modbus RTU<br>Slave Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Transmission rate                   | 4.8 kbit/s<br>9.6 kbit/s<br>19.2 kbit/s<br>38.4 kbit/s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Transmission frame                  | RTU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Number of addresses                 | 1...247                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Data format                         | 8 bits, configurable odd, even or no parity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Type of polarization                | No impedance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 4 quadrant operation possible       | True                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Asynchronous motor control profile  | Optimized torque mode<br>Variable torque standard<br>Constant torque standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Synchronous motor control profile   | Reluctance motor<br>Permanent magnet motor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Pollution degree                    | 2 conforming to IEC 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Maximum output frequency            | 0.599 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Acceleration and deceleration ramps | S, U or customized<br>Linear adjustable separately from 0.01...9999 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Motor slip compensation             | Adjustable<br>Not available in permanent magnet motor law<br>Can be suppressed<br>Automatic whatever the load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Switching frequency                 | 2...16 kHz adjustable<br>7...16 kHz with derating factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Nominal switching frequency         | 4 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Braking to standstill               | By DC injection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Brake chopper integrated            | True                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Line current                        | 8.6 A at 380 V (normal duty)<br>6.8 A at 480 V (normal duty)<br>10.7 A at 380 V (heavy duty)<br>8.5 A at 480 V (heavy duty)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                                             |                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Line current</b>                                         | 10.7 A at 380 V without line choke (heavy duty)<br>8.5 A at 480 V without line choke (heavy duty)<br>8.6 A at 380 V with external line choke (normal duty)<br>6.8 A at 480 V with external line choke (normal duty)<br>6.6 A at 380 V with external line choke (heavy duty)<br>5.3 A at 480 V with external line choke (heavy duty) |
| <b>Maximum input current</b>                                | 10.7 A                                                                                                                                                                                                                                                                                                                              |
| <b>Maximum output voltage</b>                               | 480 V                                                                                                                                                                                                                                                                                                                               |
| <b>Apparent power</b>                                       | 6.7 kVA at 480 V (normal duty)<br>7.1 kVA at 480 V (heavy duty)                                                                                                                                                                                                                                                                     |
| <b>Maximum transient current</b>                            | 10.2 A during 60 s (normal duty)<br>12.6 A during 2 s (normal duty)<br>13 A during 2 s (heavy duty)<br>11 A during 60 s (heavy duty)                                                                                                                                                                                                |
| <b>Electrical connection</b>                                | Screw terminal, clamping capacity: 1.5...4 mm <sup>2</sup> for line side<br>Screw terminal, clamping capacity: 4...6 mm <sup>2</sup> for DC bus<br>Screw terminal, clamping capacity: 1.5...4 mm <sup>2</sup> for motor<br>Screw terminal, clamping capacity: 0.2...2.5 mm <sup>2</sup> for control                                 |
| <b>Prospective line I<sub>sc</sub></b>                      | 5 kA                                                                                                                                                                                                                                                                                                                                |
| <b>Base load current at high overload</b>                   | 7.2 A                                                                                                                                                                                                                                                                                                                               |
| <b>Base load current at low overload</b>                    | 9.3 A                                                                                                                                                                                                                                                                                                                               |
| <b>Power dissipation in W</b>                               | Natural convection: 78 W at 380 V, switching frequency 4 kHz (heavy duty)<br>Forced convection: 78 W at 380 V, switching frequency 4 kHz (heavy duty)<br>Natural convection: 96 W at 380 V, switching frequency 4 kHz (normal duty)<br>Forced convection: 96 W at 380 V, switching frequency 4 kHz (normal duty)                    |
| <b>Electrical connection</b>                                | Line side: screw terminal 1.5...4 mm <sup>2</sup> /AWG 14...AWG 12<br>DC bus: screw terminal 4...6 mm <sup>2</sup> /AWG 12...AWG 10<br>Motor: screw terminal 1.5...4 mm <sup>2</sup> /AWG 14...AWG 12<br>Control: screw terminal 0.2...2.5 mm <sup>2</sup> /AWG 24...AWG 12                                                         |
| <b>With safety function Safely Limited Speed (SLS)</b>      | True                                                                                                                                                                                                                                                                                                                                |
| <b>With safety function Safe brake management (SBC/SBT)</b> | True                                                                                                                                                                                                                                                                                                                                |
| <b>With safety function Safe Operating Stop (SOS)</b>       | False                                                                                                                                                                                                                                                                                                                               |
| <b>With safety function Safe Position (SP)</b>              | False                                                                                                                                                                                                                                                                                                                               |
| <b>With safety function Safe programmable logic</b>         | False                                                                                                                                                                                                                                                                                                                               |
| <b>With safety function Safe Speed Monitor (SSM)</b>        | False                                                                                                                                                                                                                                                                                                                               |
| <b>With safety function Safe Stop 1 (SS1)</b>               | True                                                                                                                                                                                                                                                                                                                                |
| <b>With sft fct Safe Stop 2 (SS2)</b>                       | False                                                                                                                                                                                                                                                                                                                               |
| <b>With safety function Safe torque off (STO)</b>           | True                                                                                                                                                                                                                                                                                                                                |
| <b>With safety function Safely Limited Position (SLP)</b>   | False                                                                                                                                                                                                                                                                                                                               |
| <b>With safety function Safe Direction (SDI)</b>            | False                                                                                                                                                                                                                                                                                                                               |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protection type           | Thermal protection: motor<br>Safe torque off: motor<br>Motor phase loss: motor<br>Thermal protection: drive<br>Safe torque off: drive<br>Overheating: drive<br>Overcurrent: drive<br>Output overcurrent between motor phase and earth: drive<br>Output overcurrent between motor phases: drive<br>Short-circuit between motor phase and earth: drive<br>Short-circuit between motor phases: drive<br>Motor phase loss: drive<br>DC Bus overvoltage: drive<br>Line supply overvoltage: drive<br>Line supply undervoltage: drive<br>Input supply loss: drive<br>Exceeding limit speed: drive<br>Break on the control circuit: drive |
| Width                     | 85.0 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Height                    | 270.0 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Depth                     | 232.5 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Net weight                | 2.2 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Continuous output current | 9.3 A at 4 kHz for normal duty<br>7.2 A at 4 kHz for heavy duty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## Environment

|                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating altitude                                               | <= 3000 m with current derating above 1000m                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating position                                               | Vertical +/- 10 degree                                                                                                                                                                                                                                                                                                                                                                                                           |
| Product certifications                                           | UL<br>CSA<br>TÜV<br>EAC<br>CTick                                                                                                                                                                                                                                                                                                                                                                                                 |
| Marking                                                          | CE                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Standards                                                        | IEC 61800-3<br>IEC 61800-5-1<br>IEC 60721-3<br>IEC 61508<br>IEC 13849-1<br>UL 618000-5-1<br>UL 508C                                                                                                                                                                                                                                                                                                                              |
| Assembly style                                                   | With heat sink                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Electromagnetic compatibility                                    | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2<br>Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4<br>1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 |
| Environmental class (during operation)                           | Class 3C3 according to IEC 60721-3-3<br>Class 3S3 according to IEC 60721-3-3                                                                                                                                                                                                                                                                                                                                                     |
| Maximum acceleration under shock impact (during operation)       | 70 m/s² at 22 ms                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Maximum acceleration under vibrational stress (during operation) | 5 m/s² at 9...200 Hz                                                                                                                                                                                                                                                                                                                                                                                                             |
| Maximum deflection under vibratory load (during operation)       | 1.5 mm at 2...9 Hz                                                                                                                                                                                                                                                                                                                                                                                                               |
| Permitted relative humidity (during operation)                   | Class 3K5 according to EN 60721-3                                                                                                                                                                                                                                                                                                                                                                                                |
| Volume of cooling air                                            | 19.0 m³/h                                                                                                                                                                                                                                                                                                                                                                                                                        |
| type of cooling                                                  | Forced convection                                                                                                                                                                                                                                                                                                                                                                                                                |
| Overvoltage category                                             | Class III                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                                       |                                                                                                         |
|---------------------------------------|---------------------------------------------------------------------------------------------------------|
| Regulation loop                       | Adjustable PID regulator                                                                                |
| Noise level                           | 51.2 dB                                                                                                 |
| pollution degree                      | 2                                                                                                       |
| Ambient air transport temperature     | -40...70 °C                                                                                             |
| Ambient air temperature for operation | -15...50 °C without derating (vertical position)<br>50...60 °C with derating factor (vertical position) |
| Ambient air temperature for storage   | -40...70 °C                                                                                             |
| Isolation                             | Between power and control terminals                                                                     |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 11.000 cm |
| Package 1 Width              | 37.000 cm |
| Package 1 Length             | 32.000 cm |
| Package 1 Weight             | 2.910 kg  |
| Unit Type of Package 2       | P06       |
| Number of Units in Package 2 | 12        |
| Package 2 Height             | 75.000 cm |
| Package 2 Width              | 60.000 cm |
| Package 2 Length             | 80.000 cm |
| Package 2 Weight             | 47.920 kg |

## Logistical informations

|                   |    |
|-------------------|----|
| Country of origin | ID |
|-------------------|----|

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

| Environmental footprint                               |                                               |
|-------------------------------------------------------|-----------------------------------------------|
| Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) | 2670                                          |
| Environmental Disclosure                              | <a href="#">Product Environmental Profile</a> |

Use Better

| Materials and Substances          |                                                            |
|-----------------------------------|------------------------------------------------------------|
| <a href="#">EU RoHS Directive</a> | Pro-active compliance (Product out of EU RoHS legal scope) |
| REACH Regulation                  | <a href="#">REACH Declaration</a>                          |
| China RoHS Regulation             | <a href="#">China RoHS declaration</a>                     |

| Energy efficiency                                  |     |
|----------------------------------------------------|-----|
| Product contributes to saved and avoided emissions | Yes |


Use Again

| Repack and remanufacture |                                                                                                                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Circularity Profile      | <a href="#">End of Life Information</a>                                                                                                                                                                         |
| WEEE                     |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Take-back                | No                                                                                                                                                                                                              |

Dimensions Drawings


Dimensions

Views: Front - Left - Rear

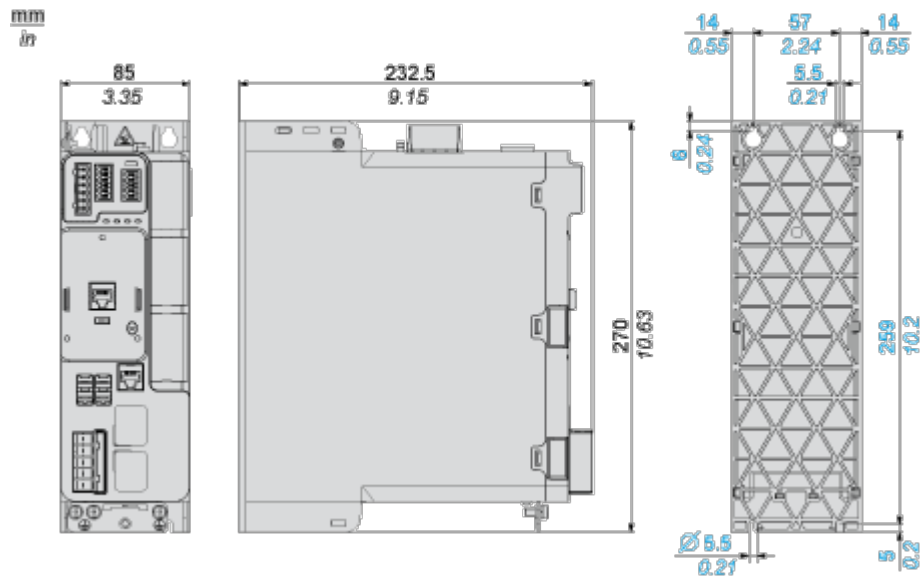

Mounting and Clearance

Clearance

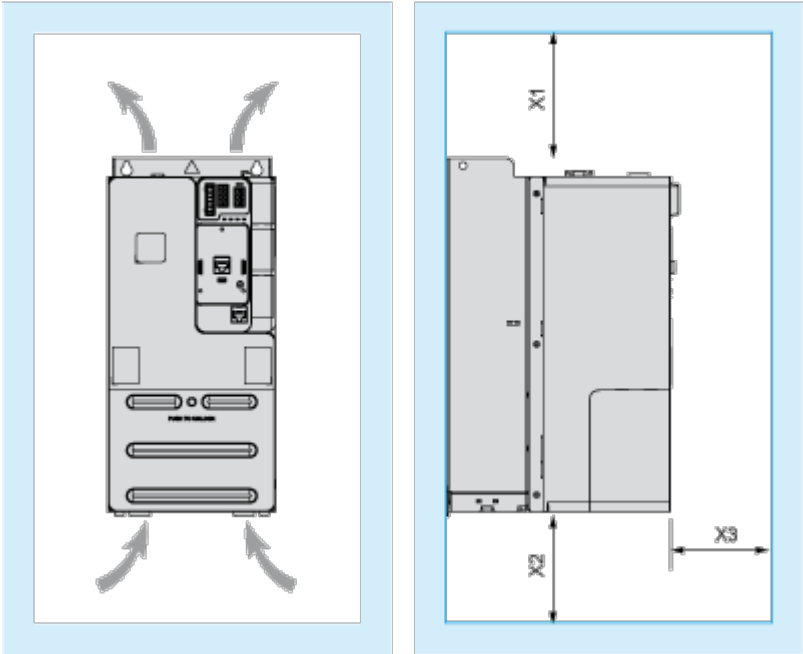

Dimensions in mm

| X1                                                                                      | X2                                                                                      | X3                                                                                     |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
|  100 |  100 |  60 |

Dimensions in in.

| X1                                                                                       | X2                                                                                       | X3                                                                                       |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
|  3.94 |  3.94 |  2.36 |

Mounting Types

Mounting Type A: Side by Side IP20



Possible, at ambient temperature  $\leq 50\text{ }^{\circ}\text{C}$  (122  $^{\circ}\text{F}$ )

Mounting Type B: Individual IP20



a  50 mm (1.97 in.) from 50...60 $^{\circ}\text{C}$ , no restriction below 50 $^{\circ}\text{C}$


## Connections and Schema

## Connections and Schema

### Three-phase Power Supply with Upstream Breaking via Line Contactor Without Safety

## Function STO

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

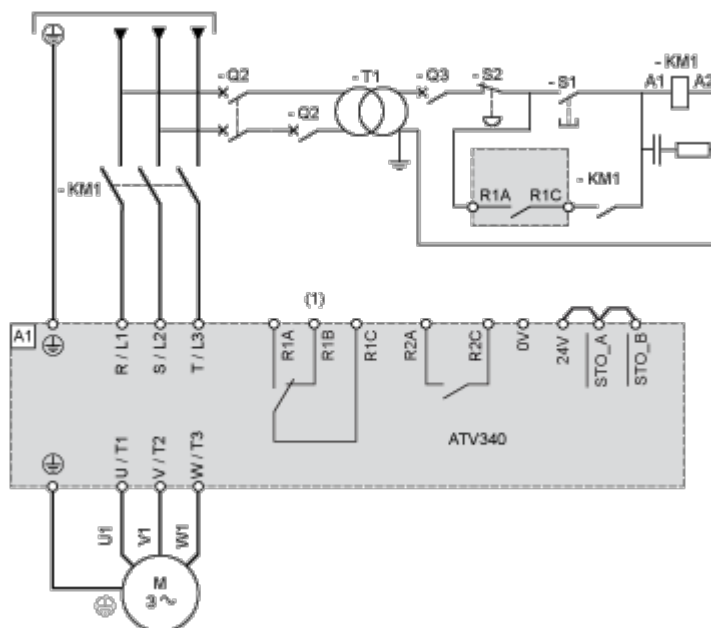

(1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive

KM1 : Line Contactor


Q2, Q3 :     Circuit breakers

S1 : Pushbutton

S2 : Emergency stop


T1 : Transformer for control part

### Three-phase Power Supply With Downstream Breaking via Switch Disconnecter

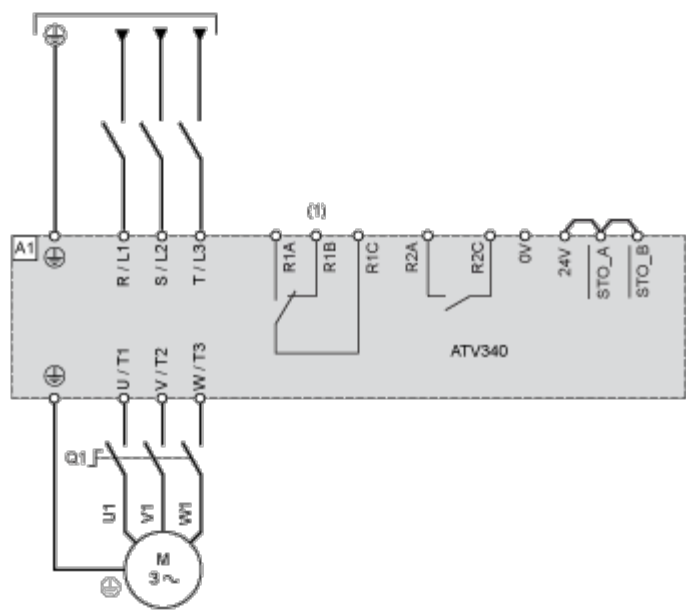


- (1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.
- A1 : Drive
- Q1 : Switch disconnector

Sensor Connection

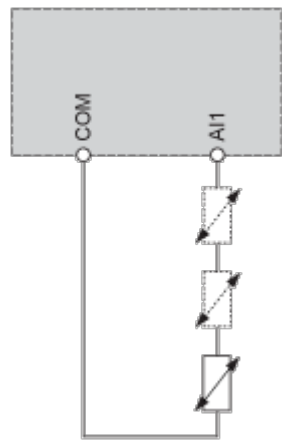

It is possible to connect either 1 or 3 sensors on terminals AI1.

Control Block Wiring Diagram

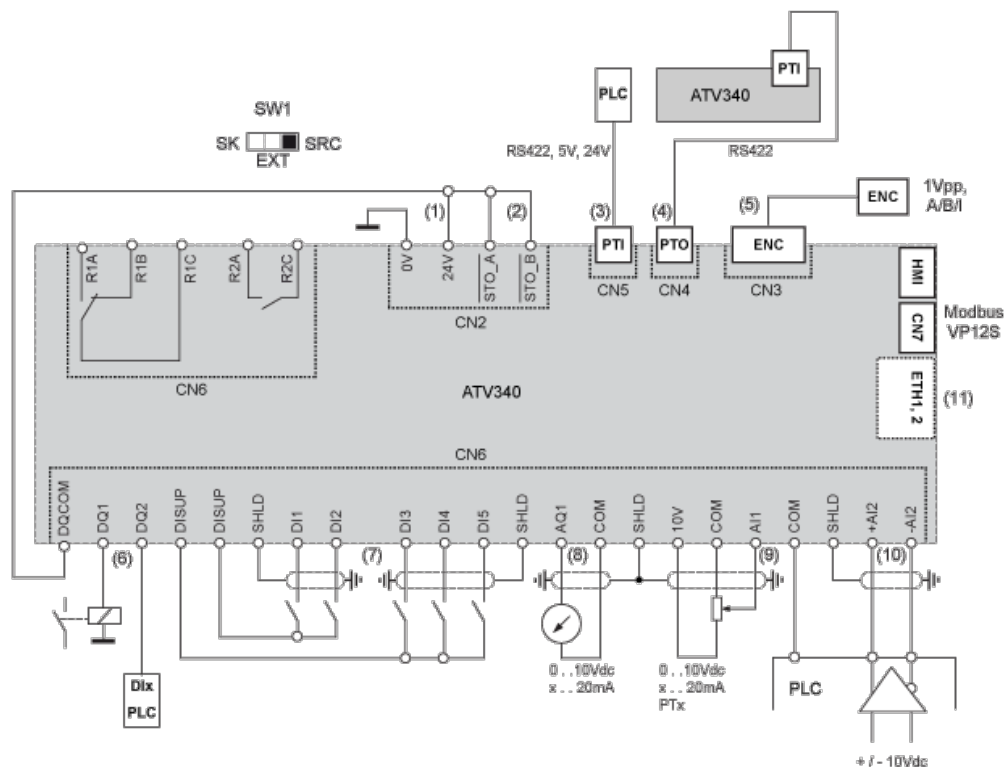


- (1) 24V supply (STO)
- (2) STO - Safe Torque Off
- (3) PTI - Pulse Train In
- (4) PTO - Pulse Train Out
- (5) Motor Encoder connection
- (6) Digital outputs
- (7) Digital inputs
- (8) Analog output
- (9) Analog input
- (10) Differential Analog Input
- (11) Ethernet port (only on Ethernet drive version)

SW1 : Sink/Source switch  
R1A, R1B, R1C : Fault relay  
R2A, R2C : Sequence relay

Digital Inputs Wiring

Digital Inputs: Internal Supply


Using DISUP Signal

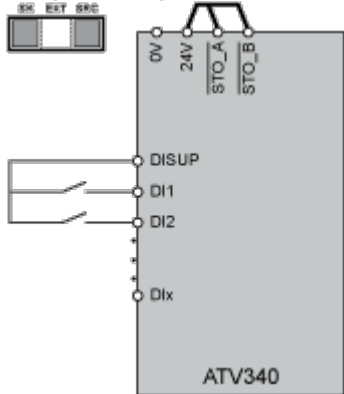


In SRC position DISUP outputs 24 V. In SK position DISUP is connected to 0 V.

Digital Inputs: External Supply

Positive Logic, Source, European Style

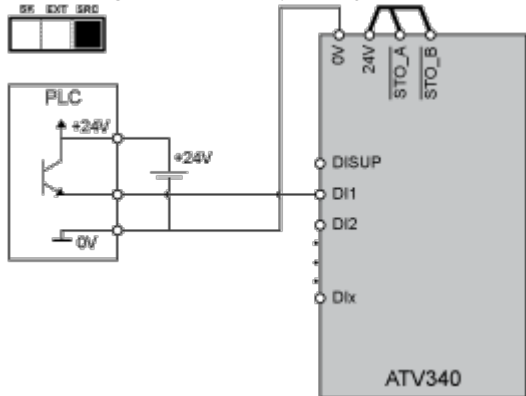

Negative Logic, Sink, Asian Style

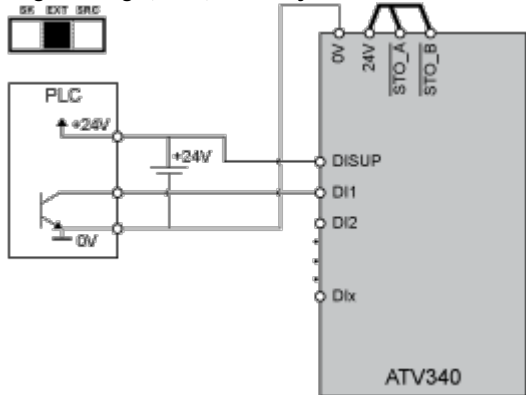

Digital Inputs: Internal supply


Negative Logic, Sink, Asian Style



Digital Outputs Wiring


Digital Outputs: Internal Supply

Positive Logic, Source, European Style, DQCOM to +24V

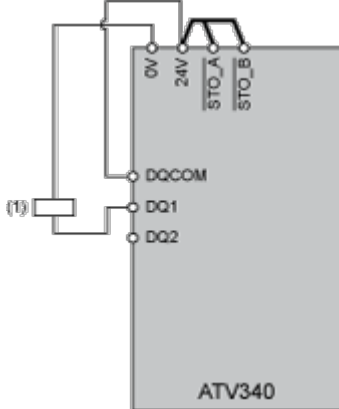

(1) Relay or valve


Negative Logic, Sink, Asian Style, DQCOM to 0V

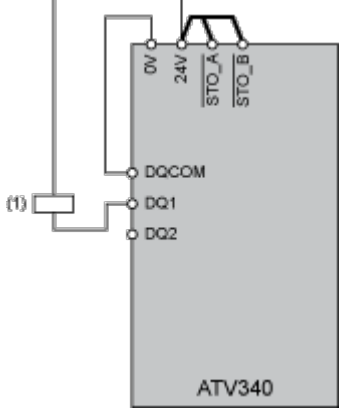

(1) Relay or valve

Digital Outputs: External Supply

Positive Logic, Source, European Style, DQCOM to +24V

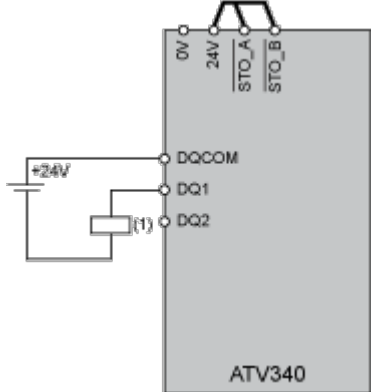

(1) Relay or valve

Negative Logic, Sink, Asian Style, DQCOM to 0V



(1) Relay or valve


Performance Curves

Open Loop Applications



- 1 : Self-cooled motor: continuous useful torque
- 2 : Force-cooled motor: continuous useful torque
- 3 : Overtorque for 60 s maximum
- 4 : Transient overtorque for 2 s maximum
- 5 : Torque in overspeed at constant power

Closed Loop Applications

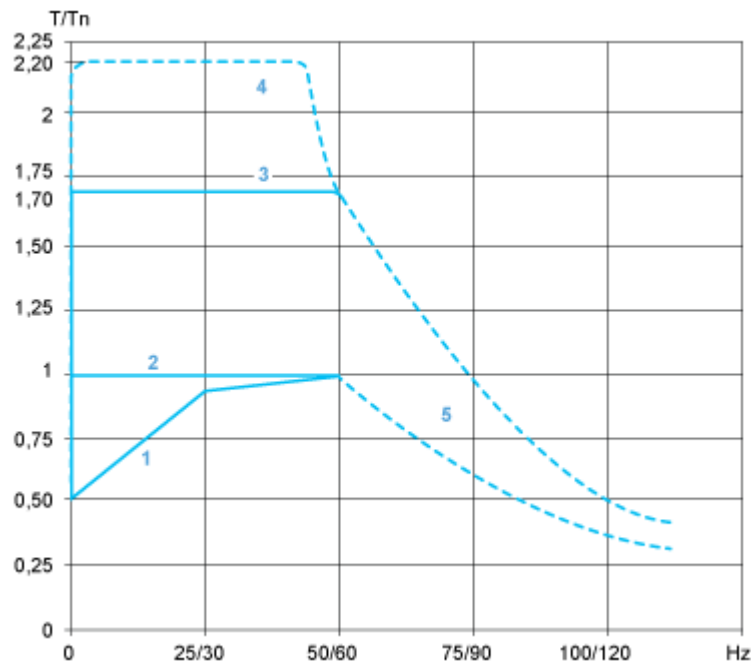

- 1 : Self-cooled motor: continuous useful torque
- 2 : Force-cooled motor: continuous useful torque
- 3 : Overtorque for 60 s maximum
- 4 : Transient overtorque for 2 s maximum
- 5 : Torque in overspeed at constant power