

# Product datasheet

Specifications



## processor module M340 - max 1024 discrete + 256 analog I/O - CANOpen

Local distributor code:

393393330

BMXP3420302

EAN Code: 3595864024455

## Main

|                                        |                                                                        |
|----------------------------------------|------------------------------------------------------------------------|
| Range of product                       | Modicon M340 automation platform                                       |
| Product or component type              | Processor module                                                       |
| Concept                                | CANopen<br>Transparent Ready                                           |
| Number of racks                        | 4                                                                      |
| Number of slots                        | 11                                                                     |
| Discrete I/O processor capacity        | 1024 I/O multi-rack configuration<br>704 I/O single-rack configuration |
| Analogue I/O processor capacity        | 256 I/O multi-rack configuration<br>66 I/O single-rack configuration   |
| Number of application specific channel | 36                                                                     |

## Complementary

|                                         |                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Control channels                        | Programmable loops                                                                                                                                                                                                                                                                                                                                          |
| Motion control                          | Independent axis CANopen                                                                                                                                                                                                                                                                                                                                    |
| Integrated connection type              | USB port at 12 Mbit/s<br>CANopen master bus SUB-D 9, transmission mode: 2 twisted shielded pairs at 20 kbit/s...1 Mbit/s<br>Ethernet TCP/IP RJ45, transmission mode: 1 twisted pair at 10/100 Mbit/s                                                                                                                                                        |
| Communication module processor capacity | 2 Ethernet communication module<br>4 AS-Interface module                                                                                                                                                                                                                                                                                                    |
| embedded communication service          | Network management (NMT) CANopen<br>Process Data Object (PDO) CANopen<br>Service Data Object (SDO) CANopen<br>Special functions (SYNC, EMCY, TIME) CANopen<br>Bandwidth management, Ethernet TCP/IP<br>Data Editor, Ethernet TCP/IP<br>Modbus TCP messaging, Ethernet TCP/IP<br>Rack Viewer, Ethernet TCP/IP<br>SNMP network administrator, Ethernet TCP/IP |
| Port Ethernet                           | 10BASE-T/100BASE-TX                                                                                                                                                                                                                                                                                                                                         |
| Transmission rate                       | 1 Mbit/s 0...20 m 0...0.6 m<br>125 kbit/s 0...500 m 0...10 m<br>20 kbit/s 0...2500 m 0...300 m<br>250 kbit/s 0...250 m 0...10 m<br>50 kbit/s 0...1000 m 0...120 m<br>500 kbit/s 0...100 m 0...10 m<br>800 kbit/s 0...40 m 0...6 m                                                                                                                           |
| Bus type                                | CANopen M20 DS 301 V4.02 devices linked by daisy-chaining or tap junctions CSMA/CA<br>CANopen M20 DS 303-2 devices linked by daisy-chaining or tap junctions CSMA/CA<br>CANopen M20 DS 405 devices linked by daisy-chaining or tap junctions CSMA/CA                                                                                                        |
| Number of server device(s)              | 63 CANopen                                                                                                                                                                                                                                                                                                                                                  |

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Number of devices per segment</b>  | 0...16 for <205 m (CANopen)<br>0...32 for <185 m (CANopen)<br>0...64 for <160 m (CANopen)                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Memory description</b>             | Supplied memory card (BMXRMS008MP) backup of programs, constants, symbols and data<br>Internal RAM 4096 kB<br>Internal RAM 256 kB data<br>Internal RAM 3584 kB program constants and symbols<br>Supplied memory card (BMXRMS008MP) activation of standard web server, class B10                                                                                                                                                                                                                                      |
| <b>Maximum size of object areas</b>   | 256 kB unlocated internal data<br>32634 %Mi located internal bits                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Default size of object areas</b>   | 1024 %MWi internal words located internal data<br>256 %KWi constant words located internal data<br>512 %Mi located internal bits                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Application structure</b>          | 1 cyclic/periodic master task<br>1 periodic fast task<br>No auxiliary task<br>64 event tasks                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Execution time per instruction</b> | 0.12 µs Boolean<br>0.17 µs double-length words<br>0.25 µs single-length words<br>1.16 µs floating points                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Number of instructions per ms</b>  | 6.4 Kinst/ms 65 % Boolean + 35 % fixed arithmetic<br>8.1 Kinst/ms 100 % Boolean                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>System overhead</b>                | 0.13 ms for fast task<br>0.7 ms for master task                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Current consumption</b>            | 135 mA at 24 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Supply</b>                         | Internal power supply via rack                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Marking</b>                        | CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Status LED</b>                     | 1 LED (green) activity on Ethernet network (ETH ACT)<br>1 LED (green) integrated machine/installation bus operational (CAN RUN)<br>1 LED (green) processor running (RUN)<br>1 LED (green) status of Ethernet network (ETH STS)<br>1 LED (red) data rate (ETH 100)<br>1 LED (red) I/O module fault (I/O)<br>1 LED (red) integrated machine/installation bus fault (CAN ERR)<br>1 LED (red) memory card fault (CARD ERR)<br>1 LED (red) processor or system fault (ERR)<br>1 LED (yellow) activity on Modbus (SER COM) |
| <b>Net weight</b>                     | 0.215 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## Environment

|                                              |                                                                                  |
|----------------------------------------------|----------------------------------------------------------------------------------|
| <b>Ambient air temperature for operation</b> | 0...60 °C                                                                        |
| <b>Relative humidity</b>                     | 10...95 % without condensation                                                   |
| <b>IP degree of protection</b>               | IP20                                                                             |
| <b>Protective treatment</b>                  | TC                                                                               |
| <b>Directives</b>                            | 2014/35/EU - low voltage directive<br>2014/30/EU - electromagnetic compatibility |
| <b>Product certifications</b>                | CE<br>UL<br>CSA<br>RCM<br>EAC<br>Merchant Navy                                   |

---

|                                     |                                                                                                                                                                           |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>                    | EN 61131-2<br>EN/IEC 61010-2-201<br>UL 61010-2-201<br>CSA C22.2 No 61010-2-201<br>IACS E10<br>EN/IEC 61000-6-5, interface type 1 and type 2<br>EN/IEC 61850-3, location G |
| <b>Environmental characteristic</b> | Hazardous location class I division 2                                                                                                                                     |

---

## Packing Units

---

|                                     |           |
|-------------------------------------|-----------|
| <b>Unit Type of Package 1</b>       | PCE       |
| <b>Number of Units in Package 1</b> | 1         |
| <b>Package 1 Height</b>             | 5.500 cm  |
| <b>Package 1 Width</b>              | 11.000 cm |
| <b>Package 1 Length</b>             | 11.700 cm |
| <b>Package 1 Weight</b>             | 251.000 g |
| <b>Unit Type of Package 2</b>       | S02       |
| <b>Number of Units in Package 2</b> | 15        |
| <b>Package 2 Height</b>             | 15.000 cm |
| <b>Package 2 Width</b>              | 30.000 cm |
| <b>Package 2 Length</b>             | 40.000 cm |
| <b>Package 2 Weight</b>             | 4.109 kg  |

---

## Logistical informations

---

|                          |    |
|--------------------------|----|
| <b>Country of origin</b> | FR |
|--------------------------|----|

---

## Contractual warranty

---

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|

---



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg.eq.CO<sub>2</sub> per CR, Total Life cycle) **162**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)


WEEE  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Take-back No

## Dimensions Drawings

Modules Mounted on Racks

## Dimensions

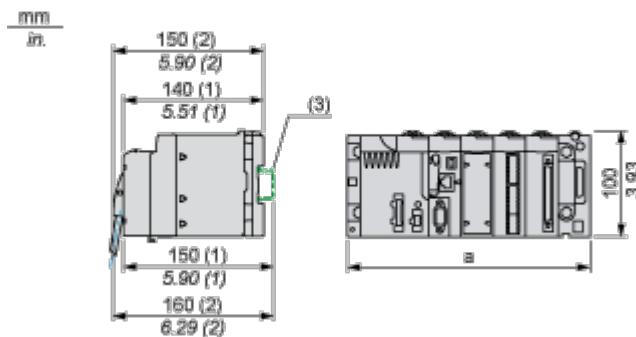

(1) With removable terminal block (cage, screw or spring).  
(2) With FCN connector.  
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

| Rack references            | a in mm | a in in. |
|----------------------------|---------|----------|
| BMXXBP0400 and BMXXBP0400H | 242.4   | 09.54    |
| BMXXBP0600 and BMXXBP0600H | 307.6   | 12.11    |
| BMXXBP0800 and BMXXBP0800H | 372.8   | 14.68    |
| BMXXBP1200 and BMXXBP1200H | 503.2   | 19.81    |