

# Voltage Repeater

## KFD2-VR2-Ex1.50M

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Voltage input 0 mV ...  $\pm 50$  mV
- Voltage output 0 mV ...  $\pm 50$  mV
- Selectable up/downscale sensor breakage detection



### Function

This isolated barrier is used for intrinsic safety applications.


It transfers low voltage signals from load cells, strain gauges, operational amplifiers, and inductive oscillation sensors located in hazardous areas to safe areas.

The input voltage of the terminals 4 and 5 is transferred to the terminals 7 and 8.

The input, output, and power supply are galvanically isolated from each other. Upscale or downscale lead breakage monitoring is selectable via switches located on the front panel of the device.

**Note:** This unit requires three minutes after power-up to reach the accuracy cited in the technical data.

### Connection

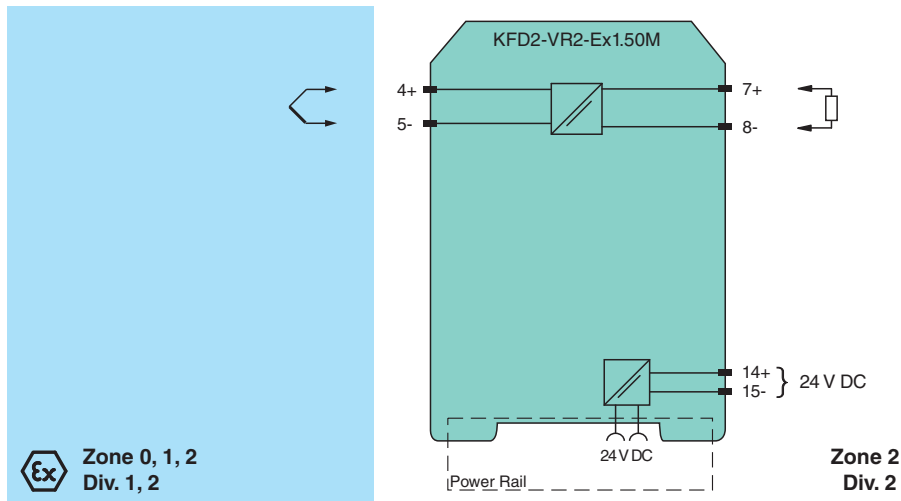

### Technical Data

#### General specifications

Signal type Analog input

#### Supply

|                                     |                                  |                |
|-------------------------------------|----------------------------------|----------------|
| Connection                          | Power Rail or terminals 14+, 15- |                |
| Rated voltage                       | $U_r$                            | 19 ... 30 V DC |
| Ripple                              | within the supply tolerance      |                |
| Rated current                       | $I_r$                            | $\leq 11$ mA   |
| Power dissipation/power consumption | 0.3 W max.                       |                |

#### Input

Connection side field side

## Technical Data

|  |                |  |
|--|----------------|--|
| Connection   |                | terminals 4+, 5-   |
| Input resistance   |                | min. 20 MΩ   |
| Transmission range   |                | -50 ... 50 mV  |
| Offset voltage/current   |                | ≤ 5 μV / ≤ 5 nA  |
| Line fault detection   |                | 100 nA   |
| <b>Output</b>  |                |  |
| Connection side  |                | control side   |
| Connection   |                | terminals 7+, 8-   |
| Voltage  |                | -50 ... 50 mV  |
| Load   |                | Accuracy figures for infinite load impedance. Additional 0.03 % of span for a load resistance of 10 kΩ                                       |
| Fault signal   |                | sensor breakage: > +100 mV (upscale), < -100 mV (downscale)  |
| Output resistance  |                | max. 3 Ω   |
| <b>Transfer characteristics</b>                                |                |  |
| Cut-off frequency  |                | 350 Hz (-3 dB)   |
| Deviation  |                |  |
| After calibration  |                | at 20 °C (68 °F): ± 3 μV up to ± 10 mV/± 0.03 % of the span up to +50 mV/± 0.05 % of the span up to -50 mV                                   |
| Influence of ambient temperature                               |                | ± 1 μV/K (typical ± 0.25 μV/K)   |
| Absolute   |                | < 0.25 K at 30 V voltage supply  |
| Rise time  |                | ≤ 1 ms   |
| <b>Galvanic isolation</b>                                      |                |  |
| Output/power supply  |                | functional insulation, rated insulation voltage 50 V AC  |
| <b>Indicators/settings</b>                                     |                |  |
| Display elements   |                | LED  |
| Control elements   |                | DIP switch   |
| Configuration  |                | via DIP switches   |
| Labeling   |                | space for labeling at the front  |
| <b>Directive conformity</b>                                    |                |  |
| Electromagnetic compatibility                                  |                |  |
| Directive 2014/30/EU   |                | EN 61326-1:2013 (industrial locations)   |
| <b>Conformity</b>  |                |  |
| Electromagnetic compatibility                                  |                | NE 21:2006   |
| Degree of protection   |                | IEC 60529:2001   |
| Protection against electrical shock                            |                | UL 61010-1   |
| <b>Ambient conditions</b>                                      |                |  |
| Ambient temperature  |                | -40 ... 60 °C (-40 ... 140 °F)<br>extended ambient temperature range up to 70 °C (158 °F), refer to manual for necessary mounting conditions |
| <b>Mechanical specifications</b>                               |                |  |
| Degree of protection   |                | IP20   |
| Connection   |                | screw terminals  |
| Mass   |                | approx. 125 g  |
| Dimensions   |                | 20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D) , housing type B2   |
| Mounting   |                | on 35 mm DIN mounting rail acc. to EN 60715:2001   |
| <b>Data for application in connection with hazardous areas</b> |                |  |
| EU-type examination certificate                                |                | BASEEFA 06 ATEX 0040   |
| Marking  |                | Ⓜ II (1)G [Ex ia Ga] IIC<br>Ⓜ II (1)D [Ex ia Da] IIIC<br>Ⓜ I (M1) [Ex ia Ma] I   |
| Voltage  | U <sub>o</sub> | 5.5 V DC   |
| Current  | I <sub>o</sub> | 2.4 mA   |
| Power  | P <sub>o</sub> | 3.3 mW   |
| <b>Supply</b>  |                |  |
| Maximum safe voltage   | U <sub>m</sub> | 250 V (Attention! The rated voltage can be lower.)   |


Release date: 2023-04-18 Date of issue: 2023-04-18 Filename: 181951\_eng.pdf

Technical Data




|                           |                       |   |
|---------------------------|-----------------------|---|
| Certificate               | BASEEFA 09 ATEX 0219X |   |
| Marking                   |                       | II 3G Ex ec IIC T4 Gc   |
| Galvanic isolation        |                       |   |
| Input/Output              |                       | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V   |
| Input/power supply        |                       | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V   |
| Directive conformity      |                       |   |
| Directive 2014/34/EU      |                       | EN IEC 60079-0:2018+AC:2020 , EN IEC 60079-7:2015+A1:2018 , EN 60079-11:2012  |
| International approvals   |                       |   |
| UL approval               |                       | E106378   |
| Control drawing           |                       | 116-0334 (cULus)  |
| IECEX approval            |                       |   |
| IECEX certificate         |                       | IECEX BAS 06.0011<br>IECEX BAS 09.0103X   |
| IECEX marking             |                       | [Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I<br>Ex ec IIC T4 Gc  |
| General information       |                       |   |
| Supplementary information |                       | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> . |

Assembly




Front view

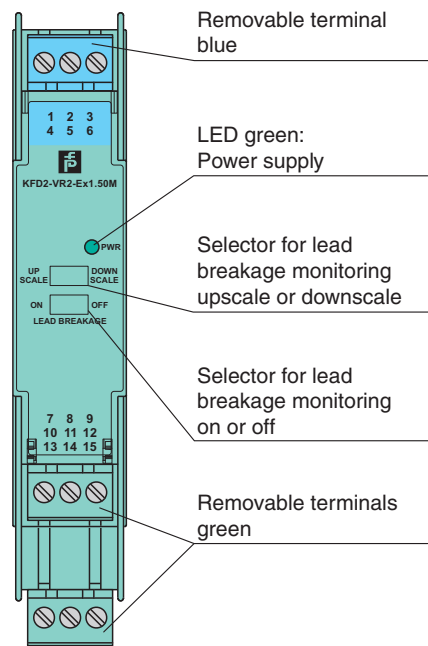




Matching System Components

|   |                 |   |
|---|-----------------|---|
|  | <b>KFD2-EB2</b> | Power Feed Module   |
|  | <b>UPR-03</b>   | Universal Power Rail with end caps and cover, 3 conductors, length: 2 m   |
|  | <b>UPR-03-M</b> | Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m |

## Matching System Components

|   |                         |  |
|---|-------------------------|--|
|  | <b>UPR-03-S</b>         | Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m      |
|  | <b>K-DUCT-BU</b>        | Profile rail, wiring comb field side, blue                                     |
|  | <b>K-DUCT-BU-UPR-03</b> | Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue |

## Accessories

|   |                  |  |
|---|------------------|--|
|  | <b>KF-ST-5GN</b> | Terminal block for KF modules, 3-pin screw terminal, green |
|  | <b>KF-ST-5BU</b> | Terminal block for KF modules, 3-pin screw terminal, blue  |
|  | <b>KF-CP</b>     | Red coding pins, packaging unit: 20 x 6                    |