

KL1889 | Bus Terminal, 16-channel digital input, 24 V DC, 3 ms, ground switching

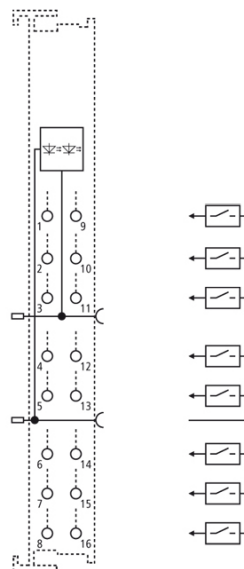
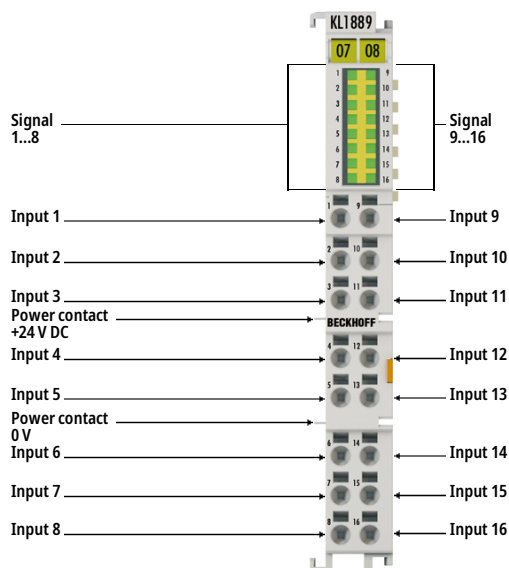


Image similar, may contain optional accessories

i **Product status:** regular delivery

The KL1889 digital input terminal acquires the binary 24 V DC control signals from the process level and transmits them, in an electrically isolated form, to the higher-level automation unit. The Bus Terminal contains sixteen channels whose signal states are indicated by light emitting diodes. The power contacts are connected through. With the KL1889, the reference ground for all inputs is the 24 V DC power contact.

Special features:

- ground switching
- no bouncing due to mechanical switches thanks to 3 ms input filter
- tool-free connection by direct plug-in technology for solid wire conductors
- space-saving use in the control cabinet
- direct connection of multi-channel sensors in 1-wire connection technology in the smallest space

Product information

Technical data

Technical data	KL1889
Connection technology	1-wire
Specification	ground switching
Number of inputs	16

Nominal voltage	24 V DC (-15%/+20%)
"0" signal voltage	18...30 V
"1" signal voltage	0...7 V
Input filter	typ. 3.0 ms
Input current	typ. 3 mA
Current consumption K-bus	typ. 20 mA
Current consumption power contacts	typ. 4 mA + load
Electrical isolation	500 V (K-bus/field potential)
Bit width in the process image	16 inputs
Configuration	no address or configuration setting
Weight	approx. 55 g
Operating temperature	-25...+60°C
Storage temperature	-40...+85°C
Relative humidity	95%, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable (see documentation)
Approvals/markings	CE, CCC, UL, ATEX, IECEx, DNV GL
Ex marking	ATEX: II 3 G Ex ec IIC T4 Gc IECEx: Ex ec IIC T4 Gc

Housing data	HD housing
Design form	HD (High Density) housing with signal LEDs
Material	polycarbonate
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	–
Wiring	solid conductors (s): direct plug-in technique; fine-stranded conductors (st) and ferrule (f): spring actuation by screwdriver
Connection cross-section	s*: 0.08...1.5 mm ² , st*: 0.25...1.5 mm ² , f*: 0.14...0.75 mm ²
Stripping length	8...9 mm
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm

*s: solid wire; st: stranded wire; f: with ferrule