

KL2134 | Bus Terminal, 4-channel digital output, 24 V DC, 0.5 A, reverse voltage protection

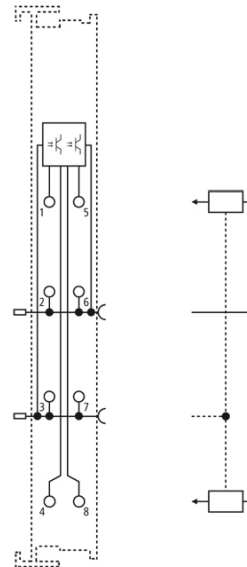
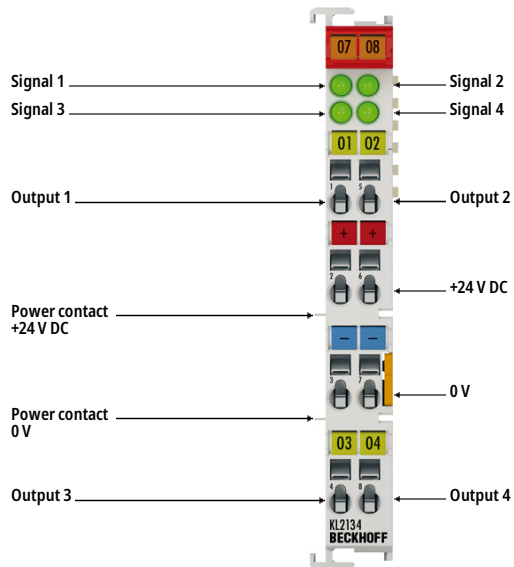



Image similar, may contain optional accessories

i **Product status:** regular delivery

The KL2134 digital output terminal connects the binary control signals from the automation unit on to the actuators at the process level with electrical isolation. The KL2134 is protected against reverse polarity connection. The Bus Terminal contains four channels that indicate their signal state by means of light emitting diodes.

Product information

Technical data

Technical data	KL2134
Connection technology	2-/3-wire
Number of outputs	4
Nominal voltage	24 V DC (-15%/+20%)
Load type	ohmic, inductive, lamp load
Max. output current	0.5 A (short-circuit proof) per channel
Short-circuit current	< 2 A
Breaking energy	< 150 mJ/channel
Reverse voltage protection	yes

Electrical isolation	500 V (K-bus/field potential)
Current consumption power contacts	typ. 30 mA + load
Current consumption K-bus	typ. 9 mA
Bit width in the process image	4 outputs
Configuration	no address or configuration setting
Weight	approx. 70 g
Operating temperature	-25...+60°C
Storage temperature	-40...+85°C
Relative humidity	95%, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Pluggable wiring	for all KSxxxx Bus Terminals
Approvals/markings	CE, CCC, UL, ATEX, IECEx, DNV GL
Ex marking	ATEX: II 3 G Ex ec IIC T4 Gc IECEx: Ex ec IIC T4 Gc

Housing data	KL-12-8pin	KS-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxxx series	
Wiring	solid conductor (s), flexible conductor (st) and ferrule (f): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²	s*: 0.08...1.5 mm ² , st*: 0.08...1.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG28...14, st*: AWG28...14, f*: AWG26...16	s*: AWG28...16, st*: AWG28...16, f*: AWG26...16
Stripping length	8...9 mm	9...10 mm
Current load power contacts	I _{max} : 10 A	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	

*s: solid wire; st: stranded wire; f: with ferrule

Ordering information

Ordering information	
KL2134	Bus Terminal, 4-channel digital output, 24 V DC, 0.5 A, reverse voltage protection
KS2134	Bus Terminal, 4-channel digital output, 24 V DC, 0.5 A, reverse voltage protection, pluggable wiring